GESSMANN°

INDUSTRIAL CONTROLLERS

CATALOG 2025/2026









GESSMANN[®]

TOOL FOR DESIGNERS, ENGINEERS AND PURCHASING AGENTS

Your tool for finding industrial controllers for cranes, electro-hydraulic systems, floor conveyors, industrial applications, ships, rail vehicles, and construction machinery of any kind, joysticks and masterswitches with electronic interface adjustment for all machines matching our product portfolio.

Take advantage of our fold-out order tool on this page and the detailed tables of contents at the beginning of each position.



PRODUCT RANGE

Joysticks with hallsensor-technology

Joysticks with contacts and potentiometer

Control-Switches

Steering Column Switch

Opto-Electronic Encoders

Control Elements

Palm Grips

Control Console

Foot Pedals

Crane Control Units

Driver's Seats

Portable Control Units

Industrial Controllers

Gear Limit Switches

Naval Cruise Controller

Control Pedestals for offshore

As of 2025

GESSMANN[®]

PRODUCT PORTFOLIO

Gessmann is an international market leader. Our success in the market is based upon our decisive focus on innovative product development and the highest possible standards when it comes to quality. Our product range includes:

- Joysticks (Multi-Axis Controller, Double-Handle Controller, Control Switch), Gear Limit Switch for hoisting, Electro-hydraulic Application, Material-handling technology and Remote Control
- Gear limit switch for joisting equipment
- Complete Crane Control Unit, Portable Control Unit, Pendant Control Unit, including wiring for all types of cranes, vehicles and industrial applications
- Operating Panels for construction machinery, industrial applications, vehicles and harvesting machines
- Control Pedestals, ship-operating transmitters, sensor units and actual-value transmitters for ship drives
- Pedal Controllers for welding machines, road and rail vehicles

- Master Controllers, panels and control stations for rail vehicles
- Displays for forklifts and construction machinery
- Proportional control electronics for solenoid valves
- Interface electronics with digital and analog outputs matching our controllers
- Interface electronics with Profibus interface or CAN-bus interface matching our controllers (input/output cards)
- DC controllers, selector switches (signal controllers) for high-voltage systems
- Customized solutions for operating devices and electronic units for any type of machinery and vehicles









MANAGEMENT CERTIFICATION:

ISO 9001 Certified



CONTENTS

Industrial Joysticks

	mudatrial obyations					
	Joysticks with hallsensor-technology			Control Elements		
	Multi-Axis Controller V85 / VV85	p.	1–11	Mini-Joystick V21	p.	144-145
	Multi-Axis Controller V27	p.	12-20	Mini-Joystick S9	p.	146-147
Ħ	Multi-Axis Controller V26	p.	21-24	Fingertip Joystick S15	p.	148-149
HEAVY DUTY	Multi-Axis Controller V25	p.	25-33	Minilever S17	p.	150-151
Į	Multi-Axis Controller V24	p.	34-39	Hall-Cross Switch HK1	p.	152-154
	Multi-Axis Controller V1	p.	40-42	Thumbwheel S12	p.	155-157
	Double-Handle Controller D85	p.	43-51	Thumbwheel S16	p.	158-159
				Hall-Push Button HD	p.	160-162
MEDIUM	Multi-Axis Controller V28	p.	52-57			
Ξ	Single-Axis Controller S26	p.	58-62	Palm Grips		
S	Multi-Axis Controller V22	p.	63-64	Palm Grip B36	p.	163-164
SMALL	Single-Axis Controller S11		65-69	Palm Grip B35	p.	165-166
	onigle And Controller on	ρ.	00 00	Palm Grip B34	p.	167-168
	Joysticks with contacts and potentiometer			Palm Grip B33	p.	169-170
	Multi-Axis Controller V8 / VV8	p.	70-73	Palm Grip B32	p.	171-172
Ħ	Multi-Axis Controller V6 / VV6	p.	74-78	Palm Grip B31	p.	173-174
HEAVY DUTY	Multi-Axis Controller VA6 Ex proof	p.	79-82	Palm Grip B30	p.	175-176
Ϋ́	Double-Handle Controller D8	p.	83-86	Palm Grip B29	p.	177-178
	Double-Handle Controller D64 / DD64	p.	87-90	Palm Grip B28	p.	179-180
				Palm Grip B26	p.	181-182
	Multi-Axis Controller V11	p.	91-94	Palm Grip B25	p.	183-185
	Multi-Axis Controller V14	p.	95-98	Palm Grip B24	p.	186-187
MEDIUM	Single-Axis Controller S14	p.	99-101	Palm Grip B23	p.	188-189
	Single-Axis Controller S2 / SS2 / S21	p.	102-105	Palm Grip B22	p.	190-191
	Single-Axis Controller S22 / SS22	p.	106-108	Palm Grip B20	p.	192-193
	Multi-Axis Controller V23	p.	109-110	Palm Grip B14/B15	p.	194-195
ဋ	Multi-Axis Controller V20		111-112	Palm Grip B10	p.	196-197
₽	Single-Axis Controller S1		113-115	Palm Grip B9	p.	198-199
	Lever Switch S51		116-119	Palm Grip B7/B8	p.	200-201
				Palm Grip B6	p.	202-203
	Control-Switches			Palm Grip B5	p.	204-205
	Control-Switch N6	p.	120-122	Palm Grip B3	p.	206-208
	Control-Switch N9	p.	123-124	Palm Grip B2	p.	209-210
	Standing Column Switch			Palm Grip B1	p.	211-212
	Steering Column Switch Steering Column Switch V23	n	125-126	Control Console		
	Steering Column Switch v25	ρ.	123-120	Control Console C1	p.	213-215
	Standard Plug Connector	p.	127	Touch Display TD1	р.	216-217
	Schematic description	p.	128	Fingerpilot SP4	p.	218-219
	of the protection class			Display Controller DC1	p.	220-221
	Standart Contact-Arrangement		129	Display Controller DC2	p.	222-225
	Technical Data		130-131	Keypad TF	p.	226-235
	Hall-Potentiometer HG2		132–133	Steering Controller LG2	р.	236-238
	Hall-Potentiometer N10		134-135		-	
	Potentiometer	p.	136	Foot Pedals		
	Opto-Electronic Encoders			Foot Pedal P20	p.	239-243
	OEC 2	p.	137-139	Foot Pedal P10/P11/P12	p.	244-245
	OEC 4	p.	140-141	Foot Pedal P8	p.	246-247
	Electronic Control Unit ES/43	p.	142-143	Foot Pedal P7	p.	248-249

Control Units

Control Units		
Remote Operator Station ROS	p.	250-252
Control Unit KST32	p.	253-255
Control Unit KST31	p.	256-258
Traversing Unit LK3	p.	259-260
Control Unit KST30	p.	261-263
Control Unit KST19	p.	264-266
Control Unit KST10	p.	267-269
Control Unit KST4	p.	270-272
Control Unit KST5	p.	273-275
Control Unit KST6	p.	276-278
Control Unit KST8	p.	279-281
Control Unit KST85	p.	282-283
Control Unit KST7/KST75	p.	284-286
Housing	p.	287-288
Command and indicating devices	p.	289-295
P. Carlo Carlo		
Driver's Seats Driver's Seat KFS12	_	000 007
	p.	296-297
Driver's Seat KFS11	p.	298-299
Driver's Seat KFS10	p.	300-301
Driver's Seat KFS9	p.	302-303
Driver's Seat KFS14	p.	304-305
Driver's Seat KFS4	p.	306-307
Driver's Seat KFS2	p.	308-309
Portable Control Units		
Portable Control Unit TS1	p.	310-311
Portable Control Unit TS2	p.	312-314
Portable Control Unit TS3	p.	315-316
Industrial Controllers		
Signal-Cam Controller NU1	p.	317-319
DC-Contact SO / SS	p.	320-321
Gear Limit Switches		
Gear Limit Switch GE1 / GE2	p.	322-324
Naval Cruise Controller		
Naval Cruise Controller AZ1	p.	325-326
Double-Handle Controller D3	p.	327-330
Single-Axis Controller S3	p.	331-334
Single-Axis Controller S23	p.	335-337
Single-Axis Controller S27	p.	338-342
Control Pedestals for offshore		
Control Pedestal U22/32	p.	343-345
Control Pedestal U23/23	p.	346-348

GESSMANN[®]

GENERALTERMS AND CONDITIONS

For our general conditions for sale and delivery please refer to our website at www.gessmann.com

Please also note:

The prices are ex-works in Leingarten excluding packaging. Packaging is charged at cost and cannot be returned. For orders below EURO 150.00 our gross prices are applicable. The minimum invoice amount is EURO 80.00, regardless of the value of the delivered goods. Therefore, we recommend combining small orders.

We are entitled to pass on any additional handling and production costs resulting from modifications to the order caused or requested by the customer (both technical modifications and non-compliance with deadlines).

Our periods of payment are: 30 days without a discount. These conditions of payment shall be deemed agreed and accepted upon receipt of our written confirmation of order.

All delivered goods shall remain our sole and absolute property until full payment is received.

The delivery period only commences upon clarification of all technical detailp. Unforeseen circumstances justify an appropriate extension of the delivery period. All documents, such as drawings, dimensional drawings, circuit diagrams, etc., are non-binding. We reserve the right to make any changes necessary, in particular changes which serve the technical advancement.

The exclusive place of jurisdiction is 74072 Heilbronn, Germany.

W. Gessmann GmbH

Eppinger Straße 221 74211 Leingarten, Germany

+49 (0) 7131 40 67-722 sales@gessmann.com www.gessmann.com

VAT: 65205/74401 Tax office Heilbronn VAT ID no.: DE 145786508

Commercial register Stuttgart HRB 100312

Managing Director Alwin Ehrensperger



/ Warning

Certain parts of this electrical device carry hazardous voltages when in operation.

Installation, maintenance, modification or retrofitting may only be carried out by qualified personnel in consideration of the appropriate safety precautionp.

Non-compliance may result in death, severe injuries or substantial property damage.





The V85/VV85 is a robust joystick commonly used in electro-hydraulic applications. Long life and high reliability is ensured by the latest contactless hall-technology. With many outputs and grip options the V85/VV85 series is flexible and customisable.

Technical data

Mechanical life V85 10 million operating cycles Mechanical life VV85 20 million operating cycles

Supply voltage See interface -40°C to +85°C Operation temperature Degree of protection Up to IP67

PLd compatible (EN ISO 13849, complies SIL2 to DIN EN IEC 61508) Functional safety



					Examp	le					
		VV85	S8	P	Т	-Z80	+R11	-В	-E	-S	-X
		_									
Basic uı		_									
V85.1	Multi-Axis Controller, 1-axis										
V85	Multi-Axis Controller, 2-axis										
	Reinforced version										
VV85.1	1-axis										
VV85	2-axis										
Control	-handle extended										-
	Standard 160 mm*										
S5	-20 mm										
S8	+20 mm										
*Only av	vailable in combination with a handle!										
											-
Gate											-
Р	Cross gate										
PX	Special gate										
Grip / P	Palm Grip										
	Knob (included in basic unit!)										
М	Knob with mechanical zero interlock										
Т	Dead man										
Н	Signal button										
D	Push button										



		VV85	S8	Р	Т	-Z80	+R11	-B	-E	-S	-X
Avis 1	/ Axis 2 (not applied for V/VV85.1)										
Z	Spring return	_									
R	Friction brake*										
	Latching:*										
11	1-0-1 (zero detent)										
22	2-0-2										
33	3-0-3										
44	4-0-4										
08	End-position latching SR2 or SR4										
19	1-0-1 + end-position latching SR2 or SR4										
80	End-position latching SR1 or SR3										
91	1-0-1 + end-position latching SR1 or SR3										
88	End-position latching SR1 + SR2 or SR3 + SR4										
99	1-0-1 + end-position latching SR1 + SR2 or SR3 + SR4										
*Maxim	num deflection angle +/- 25°!										
Degree	of protection										
В	Cover housing (included in basic unit!)										
B10	Joystick-main board sealed (IP67)*1										
B11	Joystick-main board sealed (IP67) and grip function sea	aled, grip	with drain	n hole*1							
For a so	chematic description of the protection class (see page 128	3)									
*1 not fo	or interface E319x, E419x, E5xx, E6xx, E7xx, E8xx, E903x,	E904x pc	ssible!								
Interfa	ce (description see on the following pages)										
E0xx	Switching output										
E1xx	Voltage output										
E2xx	Current output										
ЕЗхх	CAN-interface										
E4xx	CANSafety interface										
E5xx	Profibus DP-interface										
E6xx	Profinet										
E7xx	PROFIsafe										
E8xx	PWM - Output										
E9xx	Other outputs										
	onnectors										
S	Standard plug connectors (see page 127)										
Special											
Χ	Special / customer specified										



Combination possibilities with our grips



Digital output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	72 mm (reduced mounting depth on request!)			
Wiring	1. cable 14 x 0,25 mm ² 500 mm long without plu	g connector		
	2. cable 14 x 0,25 mm ² (optional for grip function	n) 500 mm long without plug connector		
	Optional with plug connector (tandard plug conn	ectors see page 127)		S
2 Direction signals + 1 zero po	osition signal (galvanically isolated) per axis			
		1 axis	E001 1	
		2 axis	2	

Voltage output (Not stabilize	d)			
Supply voltage	4,75-5,25 V DC			
Current carrying capacity	Direction signal 8 mA			
Mounting depth A	72 mm (reduced mounting depth on request!)			
Wiring	1. cable $14 \times 0.25 \text{ mm}^2 500 \text{ mm}$ long without plu	g connector		
	2. cable $14 \times 0.25 \text{ mm}^2$ (optional for grip function) 500 mm long without plug connector		
	Optional with plug connector (standard plug con	nectors see page 127)		S
0,52,54,5 V redundant + 2 direction signals per axis				
		1 axis	E104 1	
		2 axis	2	
		Output options		
		Characteristic:		
		Inverse dual		1
		Dual		2
		Inverse dual with dead zone +/- 3° (standard)		3
		Dual with dead zone +/- 3°		4



Supply voltage				
	9-32 V DC (*11,5-32)			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	72 mm (reduced mounting depth or	n request!)		
Option	Input for capacitive sensor			
Viring	1. cable 14 x 0,25 mm ² 500 mm lone	ng without plug connector		
	2. cable 14 x 0,25 mm ² (optional for	r grip function) 500 mm long without plug conr	nector	
	Optional with plug connector (stand	dard plug connectors see page 127)		
,52,54,5 V redundant + 2	2 direction signals + 1 zero position signa	al (galvanically isolated) per axis		
		1 axis	E112 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
510 V redundant + 2 dire	ection signals + 1 zero position signal (ga	alvanically isolated) per axis, supply voltage 11,	5 - 32 V DC	
		1 axis	E132 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
0010 V + 2 direction sign	nals + 1 zero position signal (galvanically	visolated) per axis, supply voltage 11,5 - 32 V D	C,	
ensor redundant with error r	nonitoring and error signal			
		1 axis	E136 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
10010 V + 2 direction si edundant sensor with error r		lly isolated) per axis, supply voltage 11,5 - 32 V	DC,	
		1 axis	E138 1	
		1 axis 2 axis	E138 1	
		2 axis	2	
		2 axis 3 axis*	2 3	
		2 axis 3 axis* 4 axis* Output options Characteristic:	2 3	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1	2 3	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1 Dual *1	2 3 4	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1	2 3 4	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1 Dual *1 Inverse dual with dead zone +/- Dual with dead zone +/-	2 3 4 1 2 3° *1 (standard) 3	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1 Dual *1 Inverse dual with dead zone +/-	2 3 4 1 2 3° *1 (standard) 3	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1 Dual *1 Inverse dual with dead zone +/- Dual with dead zone +/- **Not combinable with output E Single *2	2 3 4 1 2 3° *1 (standard) 3 4 5136X + E138X	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1 Dual *1 Inverse dual with dead zone +/- Dual with dead zone +/- ** Not combinable with output E Single *2 Single with dead zone *2 (standate)	2 3 4 1 2 3° *1 (standard) 3 4 5136X + E138X 5 ard) 6	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1 Dual *1 Inverse dual with dead zone +/- Dual with dead zone +/- **Not combinable with output E Single *2	2 3 4 1 2 3° *1 (standard) 3 4 5136X + E138X 5 ard) 6	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1 Dual *1 Inverse dual with dead zone +/- Dual with dead zone +/- ** Not combinable with output E Single *2 Single with dead zone *2 (standate)	2 3 4 1 2 3° *1 (standard) 3 4 5136X + E138X 5 ard) 6	
		2 axis 3 axis* 4 axis* Output options Characteristic: Inverse dual *1 Dual *1 Inverse dual with dead zone +/- Dual with dead zone +/- Single *2 Single with dead zone *2 (standa *2 Not combinable with output E	2 3 4 1 2 3° *1 (standard) 3 4 5136X + E138X 5 ard) 6	



Current output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	72 mm (reduced mounting depth on reque	st!)		
Option	Input for capacitive sensor			
Wiring	1. cable 14 x 0,25 mm ² 500 mm long without			
	2. cable 14 x 0,25 mm ² (optional for grip fu	nction) 500 mm long without plug connector		
	Optional with plug connector (standard plu	g connectors see page 127)		S
01020 mA + 2 direction sig	gnals + 1 zero position signal (galvanically isola	ted) per axis, sensor redundant		
with error monitoring and error	or signal		_	
		1 axis	E206 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
20020 mA + 2 direction sig	gnals + 1 zero position signal (galvanically isola	ted) per axis, sensor redundant		
with error monitoring and erro	or signal			
		1 axis	E208 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
41220 mA + 2 direction sid	gnals + 1 zero position signal (galvanically isola	ted) per axis, sensor redundant		
with error monitoring and erro				
<u> </u>		1 axis	E214 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
20 4 20 mA + 2 direction sig	gnals + 1 zero position signal (galvanically isola			
with error monitoring and error		tea, per axis, serisor reduridant		
with error monitoring and erro	or Signal	1 axis	E216 1	
		2 axis	2	
		3 axis*	3	
. 20 0 20 v.A . 2 div. div.	ata a da a de a como a deta a ata a di Arab a ata di Historia	4 axis*	4	
	signals + 1 zero position signal (galvanically iso	iateu) per axis, sensor redundant		
with error monitoring		4 suits	F005.4	
		1 axis	E226 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
		Output options		
		Single		5
		Single with dead zone +/- 3° (standard)		6
		Digital output signals:		
		Output signals standard:		
		Direction signals and zero position signals	1,5A 24 V DC	1
	ace can vary depending upon actuation elemer	nt!		
Current output with other valu	ue on request!			



CAN			
Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	Direction signal 100 mA		
, , ,	Zero position signal 100 mA (potential-free)		
	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
	Digital switching output (potential-free) 100 mA		
Mounting depth A	E3181: 72 mm		
	E3181X: 85 mm		
	E3191X - E3193X: 85 mm		
	E3194X - E3195X: 105 mm		
	(Reduced mounting depth on request!)		
Protocol	CANopen CiA DS 301 or SAE J1939 (based on)		
Baud rate	20 kBit/s to 1 Mbit/s (standard 250 kBit/s)		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	External in-/outputs cable 300 mm long without plug connector (additionally from 32 in-/outputs)	
	Optional with plug connector (standard plug connectors see page 127)		S
CAN expansion stage 1		E318 1	
- 8 analog joystick axis			
- 16 digital joystick functions			
- Input for capacitive sensor			
- Output for vibrator control			
With additional external in-/or	utputs		
- 8 external LED-outputs (dim	mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	
- 16 external LED-outputs (dir	nmable optional), 1 switching output (potential-free, 100 mA), 16* external digital inputs	3	
*External LED-outputs can be	used for LEDs in the grip		
(Control of intelligent RGB LE	Ds possible on request)		
*With the use of capacitive se	nsor, the external digital inputs are reduced by one input!		
CAN expansion stage 2		E319 1	
- 14 analog joystick axis			
- 16 digital joystick functions			
- 2 inputs for capacitive senso	ors		
- Output for vibrator control			
With additional external in-/or	utputs		
- 8 external LED-outputs (dim	mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	
- 16 external LED-outputs (dir	nmable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs	3	
- 24 external LED-outputs (dir	nmable optional), 1 switching output (potential-free, 100 mA), 24 external digital inputs	4	
- 32 external LED-outputs (dir	nmable optional), 1 switching output (potential-free, 100 mA), 32* external digital inputs	5	
*External LED-outputs can be	used for LEDs in the grip!		
(Control of intelligent RGB LE	Ds possible on request)		
Main-axis with additional digit	tal-/analog outputs separately wired (not via CAN)		
- 2 direction signals + 1 zero p	osition signal (potential-free) per main-axis		3
Additional analog outputs on	request!		



CAN Safety			
Supply voltage	9-32 V DC	_	
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	Direction signal 100 mA		
, , ,	Zero position signal 100 mA (potential-free)		
	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
	Digital switching output (potential-free) 100 mA		
Mounting depth A	E4181: 72 mm		
	E4181X: 85 mm		
	E4191X - E4193X: 85 mm		
	E4194X - E4195X: 105 mm		
	(Reduced mounting depth on request!)		
Protocol	CANopen Safety EN50325-5 or J1939-76		
Baud rate	20 kBit/s to 1 MBit/s (Standard 250 kBit/s)		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (Male)		
· · · · · · · · · · · · · · · · · · ·	CAN (OUT) cable 300 mm with plug connector M12 (Female)		
	External in-/outputs cable 300 mm long without plug connector		
	External in-/outputs cable 300 mm long without plug connector (additionally from 32 in-/outputs	-1	
	Optional with plug connector (standard plug connectors see page 127)	>)	S
CAN Safety expansion stage 1		E4181	
- 8 analog joystick axis		24101	•
- 16 digital joystick functions			_
- Input for capacitive sensor			
- Output for vibrator control			
- Output for vibrator control			
With additional external in-/outp	outs		•
	able optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	•
	nable optional), 1 switching output (potential-free, 100 mA), 16* external digital inputs	3	_
*External LED-outputs can be us			
(Control of intelligent RGB LEDs			
	sor, the external digital inputs are reduced by one input!		
with the use of capacitive sens	or, the external digital inputs are reduced by one input:		
CANopen Safety expansion sta	one 2	E4191	
- 14 analog joystick axis	aye 2	L+131	
- 16 digital joystick functions			
- 2 inputs for capacitive sensors			
- Output for vibrator control			
- Output for vibrator control			
With additional external in-/outp	nute		•
·	able optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	
	nable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs	3	
•	nable optional), 1 switching output (potential-free, 100 mA), 24 external digital inputs	4	
	nable optional), 1 switching output (potential-free, 100 mA), 24 external digital inputs	5	
*External LED-outputs can be us		3	
(Control of intelligent RGB LEDs			
(Control of Intelligent RGB LEDS	possible offrequesty.		
Main-axis with additional digital	outputs separately wired (Not via CAN)		
	sition signal (potential-free) per main-axis		3
Additional analog outputs on rec			
Additional analog outputs on rec	quest:		



Profibus DP			
Supply voltage	18-30 V DC		
Baud rate	To 12 MBit/s		
Output value	0128255		
Mounting depth A	105 mm (reduced mounting depth on request!)		
Wiring	Profibus, cable 100 mm with plug connector D-Sub 9		
	Supply voltage (applicable contact wiring) cable $12 \times 0.25 \text{ mm}^2 300 \text{ mm}$ long without plug connections.	ector	
	External in-/outputs, cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
Profibus DP		E501 1	•
- 4 analog joystick axis			•
- 16 digital joystick functions			•
- Input for capacitive sensor			•
			_
With additional external in-/outp	puts		•
- 8 external LED-outputs, 8 exte	rnal digital inputs	2	•
- 16 external LED-outputs, 16 ex	xternal digital inputs	3	_
*External LED-outputs can be us	sed for LEDs in the grip!		•
			_
Main-axis with additional contact	ct equipment separately wired (Not via profibus)		
- 2 direction contacts + 1 zero po	osition contact (not potential-free) per main-axis		1
- 1 zero position contact (potent	tial-free) per main-axis		2

Profinet			
Supply voltage	18-30 V DC		
Baud rate	To 100 MBit/s		
Output value	05121023		
Mounting depth A	85 mm (reduced mounting depth on request!)		
Wiring	Profinet (1), cable 300 mm with M12 plug connector (female)		
	Profinet (2), cable 300 mm with M12 plug connector (female)		
	Supply voltage (if applicable contact wiring) cable 12 x $0,25~\text{mm}^2$ 300 mm long without plug contact wiring)	nector	
	External in-/outputs, cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
Profinet		E603 1	
- 6 analog joystick axis			
- 24 digital joystick functions			
- Input for capacitive sensor			_
With with additional external in-	-/outputs		
- 8 external LED-outputs, 8 exte	rnal digital inputs	2	
- 16 external LED-outputs, 16 ex	xternal digital inputs	3	
*External LED-outputs can be us	sed for LEDs in the grip!		
Main-axis with additional signals	s separately wired (not via profinet)		
- 2 direction signals + zero posit	ion signal (potential-free) per main-axis		3



PROFIsafe			
Supply voltage	18-30 V DC		
Baud rate	To 100 MBit/s		
Output value	05121023		
Mounting depth A	85 mm (reduced mounting depth on request!)		
Wiring	Profinet (IN), cable 300 mm with M12 plug connector (female)		
	Profinet (OUT), cable 300 mm with M12 plug connector (female)		
	Supply voltage (if applicable contact wiring) cable 12 x 0,25 mm ² 300 mm long without plug cor	nnector	
	External in-/outputs, cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
PROFIsafe		E703 1	
- 6 analog joystick axis			
- 24 digital joystick function	is		
- Input for capacitive sensor			
With additional external in-/	outputs		
0	external digital inputs	2	
- 8 external LED-outputs, 8		2	
 8 external LED-outputs, 8 16 external LED-outputs, 1 	16 external digital inputs	3	
- 16 external LED-outputs, 1 *External LED-outputs can l Main-axis with additional sign	the used for LEDs in the grip! gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis	3	3
- 16 external LED-outputs, 1 *External LED-outputs can l Main-axis with additional sign	be used for LEDs in the grip! gnals separately wired (not via profinet safe)	3	3
- 16 external LED-outputs, 1 *External LED-outputs can k Main-axis with additional signals + zero p	be used for LEDs in the grip! gnals separately wired (not via profinet safe)	3	3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals + zero p PWM Outputs	be used for LEDs in the grip! gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis	3	3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals + zero per signa	be used for LEDs in the grip! gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC	3	3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals + zero per signals + zero per signals PWM Outputs Supply Voltage Valve control current	pe used for LEDs in the grip! gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A	3	3
- 16 external LED-outputs, 1 *External LED-outputs can le Main-axis with additional sig - 2 direction signals + zero p PWM Outputs Supply Voltage Valve control current PWM-frequency	pe used for LEDs in the grip! gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz	3	3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional sig 2 direction signals + zero p PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency	gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable	3	3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A	gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!)	3	3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A	pe used for LEDs in the grip! gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis		3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A	pe used for LEDs in the grip! gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis 5 configurable switching outputs 2A		3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A	pe used for LEDs in the grip! gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis 5 configurable switching outputs 2A LED outputs for status indication		3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals - 2 direction signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A Other features	pe used for LEDs in the grip! gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis 5 configurable switching outputs 2A LED outputs for status indication Input for redundant deadman		3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals - 2 direction signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A Other features	gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis 5 configurable switching outputs 2A LED outputs for status indication Input for redundant deadman Built-in socket Phoenix 2-pole (power supply)		3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals - 2 direction signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A Other features	gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis 5 configurable switching outputs 2A LED outputs for status indication Input for redundant deadman Built-in socket Phoenix 2-pole (power supply) Cable 1 (PWM) 12 x 1mm² 300 mm long without plug		3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A Other features	gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis 5 configurable switching outputs 2A LED outputs for status indication Input for redundant deadman Built-in socket Phoenix 2-pole (power supply) Cable 1 (PWM) 12 x 1mm² 300 mm long without plug Cable 2 (switching output) 12 x 1mm² 300 mm long without plug		3
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional sig 2 direction signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A Other features Wiring:	gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis 5 configurable switching outputs 2A LED outputs for status indication Input for redundant deadman Built-in socket Phoenix 2-pole (power supply) Cable 1 (PWM) 12 x 1mm² 300 mm long without plug Cable 2 (switching output) 12 x 1mm² 300 mm long without plug Cable 3 (creep speed / dead man) 14 x 0,25 mm² 300 mm long without plug	E801 1	
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional sig 2 direction signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A Other features Wiring:	gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis 5 configurable switching outputs 2A LED outputs for status indication Input for redundant deadman Built-in socket Phoenix 2-pole (power supply) Cable 1 (PWM) 12 x 1mm² 300 mm long without plug Cable 2 (switching output) 12 x 1mm² 300 mm long without plug Cable 3 (creep speed / dead man) 14 x 0,25 mm² 300 mm long without plug Optional with plug connector (standard plug connectors see page 127)		
- 16 external LED-outputs, 1 *External LED-outputs can be Main-axis with additional sig 2 direction signals + zero pe PWM Outputs Supply Voltage Valve control current PWM-frequency Dither frequency Mounting depth A Other features Wiring:	gnals separately wired (not via profinet safe) position signal (potential-free) per main-axis 9-32V DC max. 3 A 1225 Hz 1250 Hz adjustable 100 mm (reduced mounting depth on request!) Creep speed per axis 5 configurable switching outputs 2A LED outputs for status indication Input for redundant deadman Built-in socket Phoenix 2-pole (power supply) Cable 1 (PWM) 12 x 1mm² 300 mm long without plug Cable 2 (switching output) 12 x 1mm² 300 mm long without plug Cable 3 (creep speed / dead man) 14 x 0,25 mm² 300 mm long without plug Optional with plug connector (standard plug connectors see page 127) oportional valve magnets per axis 1 axis	E8011	






Other outputs				
Voltage output for PVG32 0,25	0,50,75Us, power supply 9-32 V DC			
Mounting depth A	72 mm (reduced mounting depth on request!)			
Option	Input for capacitive sensor			
Wiring	1. cable 14 x 0,25 mm ² 300 mm long without plug connector			
	2. cable $14 \times 0.25 \text{ mm}^2$ 300 mm long without plug connector (optional for	grip function)		
	Optional with plug connector (standard plug connectors see page 127)			S
		1 axis	E907 1	
		2 axis	2	
		3 axis	3	
		4 axis	4	
		5 axis	5	
		6 axis	6	
Main-axis with additional direct	ion signals and zero direction signals (potential-free) per main-axis			3
8 Bit Gray-Code with direction s	signals per main-axis, supply voltage 9-36 V DC			
Mounting depth A	85 mm			
Wiring:	1. cable 37 x 0,14 mm ² 300 mm long without plug connector (axis 1+2)			
	2. cable 37 x 0,14 mm ² 300 mm long without plug connector (optional for a	axis 3+4)		
	Optional with plug connector (standard plug connectors see page 127)			S
		1 axis	E903 :	1
		2 axis	:	2
		3 axis	:	3
		4 axis	4	1
8 Bit binary-Code with direction	n signals per main-axis, supply voltage 9-36 V DC			
Mounting depth A	85 mm			
Wiring:	1. cable 37 x 0,14 mm ² 300 mm long without plug connector (axis 1+2)			
	2. cable 37 x 0,14 mm ² 300 mm long without plug connector (optional for a	axis 3+4)		
	Optional with plug connector (standard plug connectors see page 127)			S
		1 axis	E904 :	1
		2 axis		2
		3 axis		3
		4 axis	4	1

Attachments		
Z01	Mating connector (CAN) M12 (male insert) with 2 m cable	20201140
Z02	Mating connector (CAN) M12 (female contact) with 2 m cable	20202298
Z03	Mating connector (Profibus) straight	22201440
Z04	Mating connector (Profibus) 90° angled	22201741
Z05	Mating connector (Profinet) M12 (male insert) with 2 m cable	5300000222



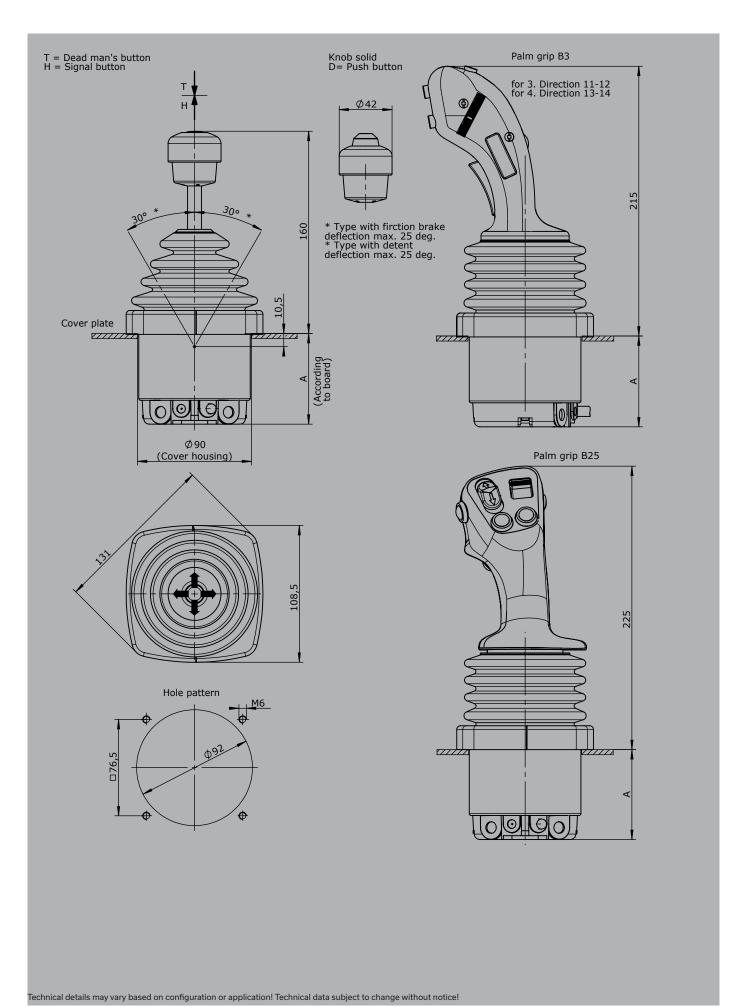





The V27 is a robust joystick commonly used in electro-hydraulic applications. The compact design allows for use in smallest installation spaces. It can be integrated with detents and a very robust friction brake. Long life and high reliability is ensured by the latest contactless hall-technology. With many outputs and grip options the V27 series is flexible and customisable.

Technical data

Mechanical life V27 10 million operating cycles

Supply voltage See interface

Operation temperature -40°C to +85°C

Degree of protection Up to IP67

Functional safety
PLd compatible (EN ISO 13849, complies SIL2

to DIN EN IEC 61508)



Example **V27** Р **S8** Т -R11 +Z -B10 -E... -S. .. -X Basic unit V27.1 Multi-Axis Controller, 1-axis V27 Multi-Axis Controller, 2-axis Control-handle extended Standard 95 mm* +20 mm *Only available in combination with a handle! Gate Р Cross gate РΧ Special gate Grip / Palm Grip Knob (included in basic unit!) Knob with mechanical zero interlock M Т Dead man Н Signal button D Push button В.. Palm Grip B... (see page Palm Grip 163) Axis 1 / Axis 2 (not applied for V27.1) Ζ Spring return R Friction brake (possible with one axis!) Latching 11 1-0-1 (zero detent) 22 2-0-2 33 3-0-3 44 4-0-4 08 End-position latching SR2 or SR4 19 1-0-1 + end-position latching SR2 or SR4 80 End-position latching SR1 or SR3 91 1-0-1 + end-position latching SR1 or SR3 88 End-position latching SR1 + SR2 or SR3 + SR4 99 1-0-1 + end-position latching SR1 + SR2 or SR3 + SR4



V27 -R11 +Z -B10 -E... -S... -X Degree of protection В Cover housing (included in basic unit!) B10 Joystick-main board sealed (IP67)*1 Joystick-main board sealed (IP67) and grip function sealed, grip with drain hole*1 B11 For a schematic description of the protection class (see page 128) *1 not for interface E321x, E421x, E6xx, E7xx possible! **Interface** (description see on the following pages) E0xx Switching output E1xx Voltage output E2xx Current output

E6xx Profinet
E7xx PROFIsafe
E9xx Other outputs

CAN-interface

CAN Safety interface

Plug connectors

E3xx E4xx

S... Standard plug connectors (see page 127)

Special model

X Special / customer specified

Combination possibilities with our grips



Digital output Supply voltage 9-32 V DC Current carrying capacity Direction signal 150 mA Zero position signal 500 mA Mounting depth A 45 mm Wiring 1. cable 14 x 0,25 mm² 500 mm long without plug connector 2. cable 14 x 0,25 mm² (optional for grip function) 500 mm long without plug connector Optional with plug connector (standard plug connectors see page 127) S 2 Direction signals + 1 zero position signal (galvanically isolated) per axis F001 1 1 axis 2 axis



Voltage output (not stabilized	1)			
Supply voltage	4,75-5,25 V DC			
Current carrying capacity	Direction signal 8 mA			
Mounting depth A	45 mm			
Wiring	1. cable 14 x 0,25 mm ² 500 mm long with	nout plug connector		
	2. cable 14 x 0,25 mm² (grip function) 50	0 mm long without plug connector		
	Optional with plug connector (standard p	lug connectors see page 127)		S
0,52,54,5 V redundant + 2	direction signals per axis			
		1 axis	E104 1	
		2 axis	2	
		Output options		
		Characteristic:		
		Inverse dual		1
		Dual		2
		Inverse Dual with dead zone +/- 3° (standard)		3
		Dual with dead zone +/- 3°		4

Voltage output			
Supply voltage	9-32 V DC (*11,5-32)		
Current carrying capacity	Direction signal 150 mA		
	Zero position signal 500 mA		
Mounting depth A	45 mm (60 mm from 3 axis)		
Viring	1. cable 14 x 0,25 mm ² 500 mm long	without plug connector	
	2. cable $14 \times 0.25 \text{ mm}^2$ (optional for 0.00×10^{-2}	grip function) 500 mm long without plug connector	
	Optional with plug connector (standa	ard plug connectors see page 127)	
),52,54,5 V redundant + 2	direction signals + 1 zero position signal	(galvanically isolated) per axis	
		1 axis	E112 1
		2 axis	2
		3 axis*	3
		4 axis*	4
510 V redundant + 2 dire	ection signals + 1 zero position signal (gal	vanically isolated) per axis, supply voltage 11,5 - 32 V DC	
		1 axis	E132 1
		2 axis	2
		3 axis*	3
		4 axis*	4
L0010 V + 2 direction sign	nals + 1 zero position signal (galvanically is	solated) per axis, supply voltage 11,5 - 32 V DC,	
ensor redundant with error r	monitoring and error signal		
		1 axis	E136 1
		2 axis	2
		3 axis*	3
		4 axis*	4
		Output options	
		Characteristic:	
		Inverse dual *1	1
		Dual *1	2
		Inverse dual with dead zone +/- 3° *1 (standard)	3
		Dual with dead zone +/- 3° *1	4
		*1 Not combinable with output E136X	
		Single *2	5
		Single with dead zone *2 (standard)	6
			X

Voltage output with other value on request!
Technical details may vary based on configuration or application! Technical data subject to change without notice!

*Axis for grip functions, interface can vary depending upon actuation element!



Current output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	45 mm (60 mm from 3 axis)			
Wiring	1. cable 14 x 0,25 mm ² 500 mm long without	plug connector		
	2. cable 14 x 0,25 mm² (optional for grip fund	tion) 500 mm long without plug co	onnector	
	Optional with plug connector (standard plug	connectors see page 127)		S
01020 mA + 2 direction signa	als + 1 zero position signal (galvanically isolated	d) per axis, sensor redundant		
with error monitoring and error s	signal			_
		1 axis	E206 1	
		2 axis	2	_
		3 axis*	3	_
		4 axis*	4	_
20020 mA + 2 direction signa	als + 1 zero position signal (galvanically isolated	d) per axis, sensor redundant		
with error monitoring and error s	signal			
		1 axis	E208 1	
		2 axis	2	
		3 axis*	3	_
		4 axis*	4	_
41220 mA + 2 direction signa	als + 1 zero position signal (galvanically isolate	d) per axis, sensor redundant		_
with error monitoring and error s	signal			_
		1 axis	E214 1	
		2 axis	2	_
		3 axis*	3	_
		4 axis*	4	_
20420 mA + 2 direction signal	als + 1 zero position signal (galvanically isolated	d) per axis, sensor redundant		_
with error monitoring and error s	signal			_
		1 axis	E216 1	
		2 axis	2	_
		3 axis*	3	
		4 axis*	4	_
		Output options		
		Single		5
		Single with dead zone +/- 3° (stan	ndard)	6
*Axis for grip functions, interface	e can vary depending upon actuation element!			
Current output with other value	on request!			



Identification of the installation variants with switching directions:



Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	Direction signal 100 mA		
	Zero position signal 100 mA		
	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
	Digital switching output (potential-free) 100 mA		
Mounting depth A	45 mm (expansion stage 1)		
	60 mm (expansion stage 2)		
Protocol	CANopen CiA DS 301 or SAE J1939 (based on)		
Baud rate	20 kBit/s to 1 Mbit/s (standard 250 kBit/s)		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	External in-/outputs cable 300 mm long without plug connector (additional from 32 in-/outputs)	
	Optional with plug connector (standard plug connectors see page 127)		S
CAN expansion stage 1		E320 1	
- 6 analog joystick axis			
	(of which 2 inputs can be used for the cap. sensor)		
- 16 digital joystick functions	(of which 2 inputs can be used for the cap. sensor)		H
	(of which 2 inputs can be used for the cap. sensor)	E321 1	3
- 16 digital joystick functions	(of which 2 inputs can be used for the cap. sensor)	E321 1	ì
 - 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis 	(of which 2 inputs can be used for the cap. sensor) (of which 2 inputs can be used for the cap. sensor)	E321 1	i
 - 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis - 16 digital joystick functions 	(of which 2 inputs can be used for the cap. sensor)	E321 1	i
- 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis - 16 digital joystick functions With additional external in-/o	(of which 2 inputs can be used for the cap. sensor) utputs	E321 1	ĺ
- 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis - 16 digital joystick functions With additional external in-/o - 8 external LED-outputs (dim	(of which 2 inputs can be used for the cap. sensor) utputs mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs		
- 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis - 16 digital joystick functions With additional external in-/o - 8 external LED-outputs (dir - 16 external LED-outputs (dir	(of which 2 inputs can be used for the cap. sensor) utputs mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs mmable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs	2	
- 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis - 16 digital joystick functions With additional external in-/o - 8 external LED-outputs (dir - 16 external LED-outputs (dir - 24 external LED-outputs (dir	(of which 2 inputs can be used for the cap. sensor) utputs mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2 3	
- 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis - 16 digital joystick functions With additional external in-/o - 8 external LED-outputs (dir - 16 external LED-outputs (dir - 24 external LED-outputs (dir	(of which 2 inputs can be used for the cap. sensor) utputs mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs mmable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs mmable), 1 switching output (potential-free, 100 mA), 24 external digital inputs mmable), 1 switching output (potential-free, 100 mA), 32 external digital inputs	2 3 4	
- 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis - 16 digital joystick functions With additional external in-/o - 8 external LED-outputs (dir - 16 external LED-outputs (dir - 24 external LED-outputs (dir - 32 external LED-outputs (dir	(of which 2 inputs can be used for the cap. sensor) utputs mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs mmable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs mmable), 1 switching output (potential-free, 100 mA), 24 external digital inputs mmable), 1 switching output (potential-free, 100 mA), 32 external digital inputs e used for LEDs in the grip	2 3 4	
- 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis - 16 digital joystick functions With additional external in-/o - 8 external LED-outputs (dir - 16 external LED-outputs (dir - 24 external LED-outputs (dir - 32 external LED-outputs (dir *External LED-outputs can be	(of which 2 inputs can be used for the cap. sensor) utputs mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs mmable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs mmable), 1 switching output (potential-free, 100 mA), 24 external digital inputs mmable), 1 switching output (potential-free, 100 mA), 32 external digital inputs e used for LEDs in the grip	2 3 4	
- 16 digital joystick functions CAN expansion stage 2 - 12 analog joystick axis - 16 digital joystick functions With additional external in-/o - 8 external LED-outputs (dir - 16 external LED-outputs (dir - 24 external LED-outputs (dir - 32 external LED-outputs (dir *External LED-outputs can be (Control of intelligent RGB LE	(of which 2 inputs can be used for the cap. sensor) utputs mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs mmable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs mmable), 1 switching output (potential-free, 100 mA), 24 external digital inputs mmable), 1 switching output (potential-free, 100 mA), 32 external digital inputs e used for LEDs in the grip	2 3 4	



CAN Safety			
Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	Direction signal 100 mA		
	Zero position signal 100 mA (potential-free)		
	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
	Digital switching output (potential-free) 100 mA		
Baud rate	20 kBit/s to 1 MBit/s (standard 250 kBit/s)		
Mounting depth	45 mm (expansion stage 1)		
	60 mm (expansion stage 2)		
Protocol	CANopen Safety EN50325-5 or J1939-76		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	External in-/outputs cable 300 mm long without plug connector (additional from 32 in-/outputs)		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN Safety expansion stage 1	1	420 1	_
- 6 analog joystick axis			_
- 16 digital joystick functions (o	of which 2 inputs can be used for the cap. sensor)		_
(Control of intelligent RGB LED	s possible on request)		_
CAN Safety expansion stage 2	2	E421 1	_
- 12 analog joystick axis			_
- 16 digital joystick functions (o	of which 2 inputs can be used for the cap. sensor)		_
			_
With additional external in-/out	•		_
	nable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs mable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs	2	_
	mable optional), 1 switching output (potential-free, 100 mA), 24 external digital inputs	4	_
	mable optional), 1 switching output (potential-free, 100 mA), 32* external digital inputs	5	
*External LED-outputs can be u			
(Control of intelligent RGB LED			
Main-axis with additional digita	al outputs separately wired (not via CAN)		
- 2 direction signals per main ax	xis		3



Profinet			
Supply voltage	18-30 V DC		
Baud rate	To 100 MBit/s		
Ausgangswert	05121023		
Mounting depth A	90 mm		
Wiring	Profinet (1), cable 300 mm with M12 plug connector (female)		
	Profinet (2), cable 300 mm with M12 plug connector (female)		
	Supply voltage (if applicable contact wiring) cable 12 x 0,25 mm ² 300 mm long without plug co	onnector	
	External in-/outputs, cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
Profinet		E602 1	
- 4 analog joystick axis			
- 20 digital joystick functions			
- Input for capacitive sensor			
With additional external in-/o	putputs		
- 8 external LED-outputs, 8 e	xternal digital inputs	2	
*External LED-outputs can b	e used in the grip for LEDs!		
Main-axis with additional sig	nals separately wired (not via profinet safe)		
- 2 direction signals + zero po	osition signal (potential-free) per main-axis		3


PROFIsafe				
Supply voltage	18-30 V DC			
Baud rate	To 100 MBit/s			
Output value	05121023			
Mounting depth A	90 mm			
Wiring	Profinet (1), cable 300 mm with M12 plug connector (female)			
	Profinet (2), cable 300 mm with M12 plug connector (female)			
	Supply voltage (if applicable contact wiring) cable $12 \times 0.25 \text{mm}^2 300 \text{mm}$ long without plug contact wiring)	nector		
	External in-/outputs, cable 300 mm long without plug connector			
	Optional with plug connector (standard plug connectors see page 127)			S
PROFIsafe		E702 1		
- 4 analog joystick axis				
- 20 digital joystick functions				
- Input for capacitive sensor				
With additional external in-/out	puts			
- 8 external LED-outputs, 8 exte	rnal digital inputs	2		
*External LED-outputs can be u	sed in the grip for LEDs!			
Main-axis with additional signal	s separately wired (not via profinet safe)			
- 2 direction signals + zero posit	ion signal (potential-free) per main-axis		3	



Other outputs				
Voltage output for PVG32 0,25	0,50,75Us, power supply 9-32 V DC			
Option	Input for capacitive sensor			
Mounting depth A	45 mm (60 mm from 3 axis)			
Wiring:	1. cable 14 x 0,25 mm ² 300 mm long without plug connector			
	2. cable $14x0,25mm^2300mm$ long without plug connector (optional for	grip function)		
	Optional with plug connector (standard plug connectors see page 127)			S
		1 axis	E907 1	
		2 axis	2	
		3 axis	3	
		4 axis	4	_
Main-axis with additional direction	on signals and zero direction signals (potential-free) per main-axis			3

Attachments	
Z01 Mating connector M12 male insert with 2 m cable	20201140
Z02 Mating connector M12 female insert with 2 m cable	20202298



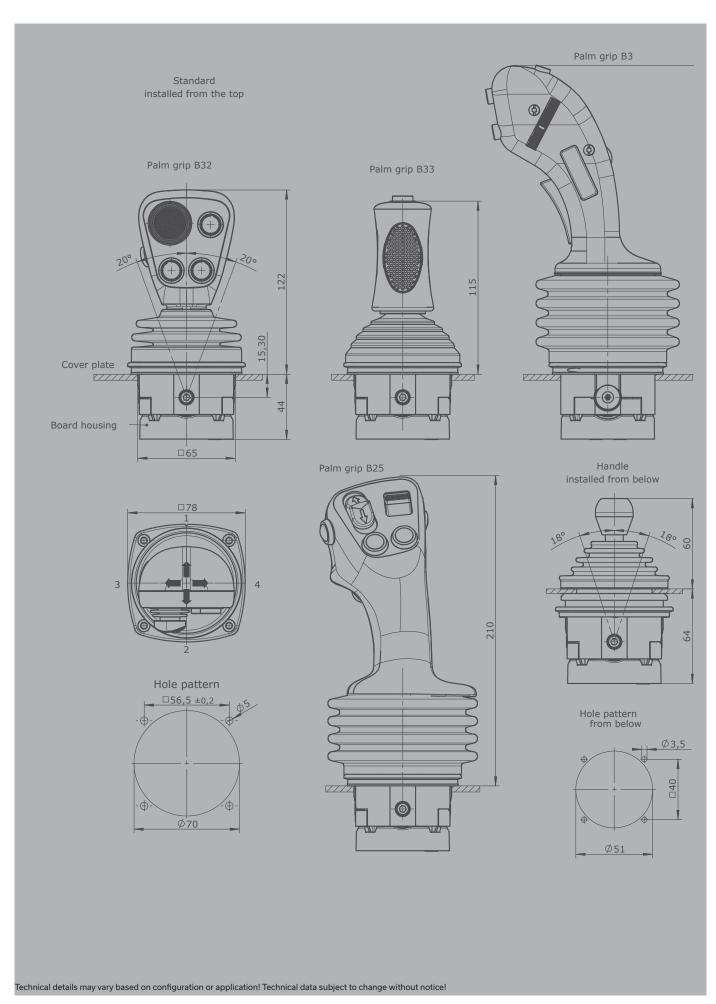





The V26 is a robust joystick commonly used in electro-hydraulic applications. Long life and high reliability is ensured by the latest contactless hall-technology. With many outputs and grip options the V26 series is hugely customisable.

Technical data

Mechanical life V26 10 million operating cycles


Supply voltage See interface -40°C to +85°C Operation temperature

IP22 Degree of protection

PLd compatible (EN ISO 13849, complies SIL2 Functional safety

to DIN EN IEC 61508)



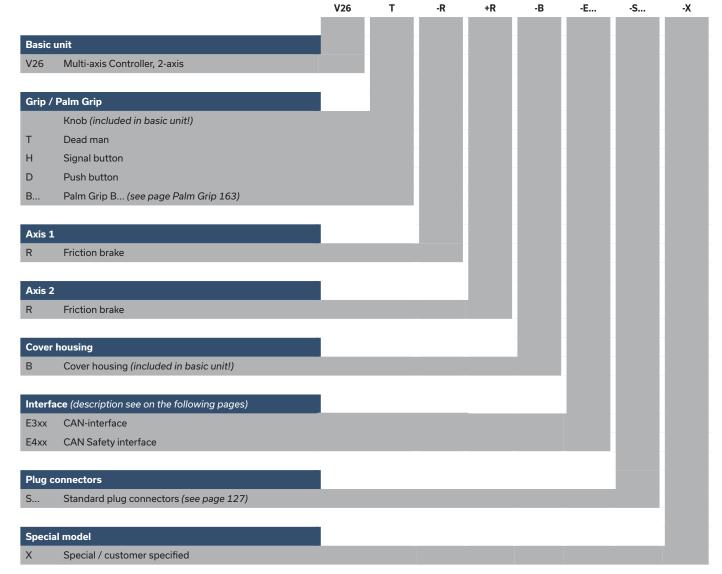



CAN			
Supply voltage	9-36 V DC		
Idle current consumption	120 mA		
	External digital output for LEDs 5-30 mA (dependent on the number of LEDs)		
	Digital switching output (potential-free) 100 mA		
Mounting depth A	E3181: 105 mm		
	E3181X: 130 mm		
	E3191X - E3193X: 130 mm		
	E3194X - E3195X: 160 mm		
Protocol	CANopen CiA DS 301 or SAE J 1939 (based on)		
Baud rate	125 kBit/s to 1 Mbit/s (standard 250 kBit/s)		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm without plug connector		
	External in-/outputs cable 300 mm without plug connector (additionally from 32 in-/outputs)		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN expansion stage 1		E318	1
- 8 analog joystick axis			
- 16 digital joystick functions			
- Input for capacitive sensor			
- Output for vibrator control			
With additional external in-/outp	puts		
- 8 external LED-outputs (dimma	able optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs		2
- 16 external LED-outputs (dimn	nable optional), 1 switching output (potential-free, 100 mA), 16* external digital inputs		3
*External LED-outputs can be us	sed for LEDs in the grip		
(Control of intelligent RGB LEDs	s possible on request)		
*With the use of capacitive sens	sor, the external digital inputs are reduced by one input!		

CAN Safety				
Supply voltage	9-36 V DC			
Idle current consumption	120 mA			
	External digital output for LEDs 5-30 mA (dependent on the number of LEDs)			
	Digital switching output (potential-free) 100 mA			
Mounting depth A	E4181: 105 mm			
	E4181X: 130 mm			
	E4191X - E3193X: 130 mm			
	E4194X - E3195X: 160 mm			
Protocol	CANopen Safety EN50325-5 or J1939-76			
Baud rate	125 kBit/s to 1 Mbit/s (standard 250 kBit/s)			
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)			
	CAN (OUT) cable 300 mm with plug connector M12 (female)			
	External in-/outputs cable 300 mm without plug connector			
	External in-/outputs cable 300 mm without plug connector (additionally from 32 in-/outputs)			
	Optional with plug connector (standard plug connectors see page 127)			S
CAN Safety expansion stage 1		E418	1	
- 8 analog joystick axis				
- 16 digital joystick functions				
- Input for capacitive sensor				
- Output for vibrator control				
*With the use of capacitive sens	or, the external digital inputs are reduced by one input!			



With additional external in-/outputs

- 8 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs

2 - 16 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 16* external digital inputs


3 *External LED-outputs can be used for LEDs in the grip!

(Control of intelligent RGB LEDs possible on request)

*When using a capacitive sensor, the external digital inputs are reduced by one input!

Attachments	
Z01 Mating connector M12 male insert with 2 m cable	20201140
Z02 Mating connector M12 female insert with 2 m cable	20202298



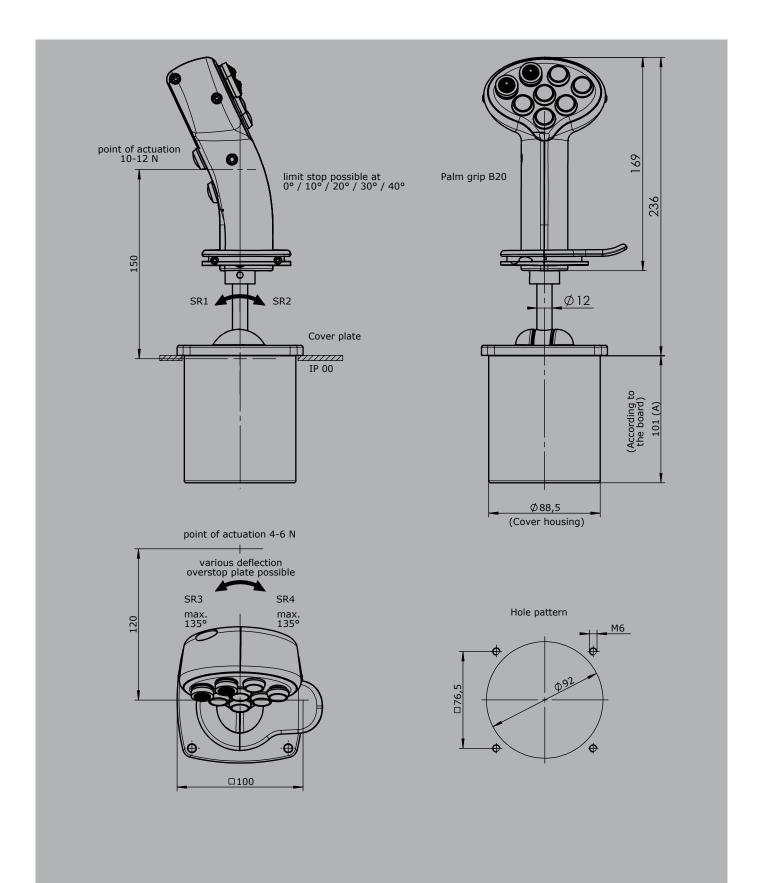



The V25 is a compact and robust joystick commonly used in electro-hydraulic applications. Long life and high reliability is ensured by the latest contactless hall-technology. With many outputs and grip options the V25 series is hugely customisable.

Technical data


Mechanical life V25 8 million operating cycles

Supply voltage See interface -40°C to +85°C Operation temperature Degree of protection Up to IP67

PLd compatible (EN ISO 13849, complies SIL2 Functional safety

to DIN EN IEC 61508)



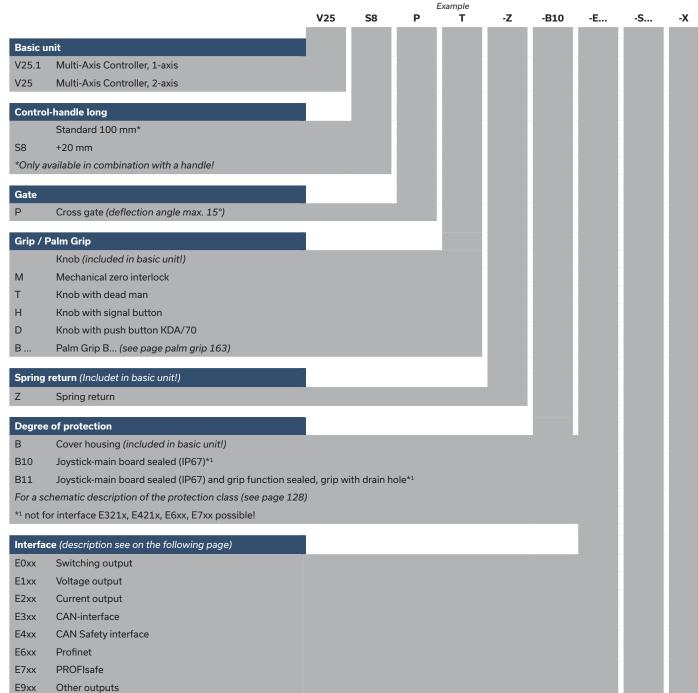



V25 S8 P T -Z -B10 -E... -S... -X

Plug connectors

S... Standard plug connectors (see page 127)

Special model

X Special / customer specified

Combination possibilities with our grips



Digital output Supply voltage 9-32 V DC Current carrying capacity Direction signal 150 mA Zero position signal 500 mA Mounting depth A 60 mm Wiring 1. cable 14 x 0,25 mm² 500 mm long without plug connector 2. cable 14 x 0,25 mm² (optional for grip function) 500 mm long without plug connector S Optional with plug connector (standard plug connectors see page 127) 2 Direction signals + 1 zero position signal (galvanically isolated) per axis E0011 1 axis 2 axis 2

Voltage output (not stabilized) 4.75-5.25 V DC Supply voltage Current carrying capacity Direction signal 8 mA Mounting depth A 60 mm Wiring 1. cable 14 x 0,25 mm² 500 mm long without plug connector 2. cable 14 x 0,25 mm² (optional for grip function) 500 mm long without plug connector S Optional with plug connector (standard plug connectors see page 127) 0,5...2,5...4,5 V redundant + 2 direction signals per axis E1041 1 axis 2 axis **Output options** Characteristic: Inverse dual Dual 2 Inverse Dual with dead zone +/- 3° (standard) 3 Dual with dead zone +/- 3°




Voltage output				
Supply voltage	9-32 V DC (*11,5-32)			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	60 mm			
Wiring	1. cable 14 x 0,25 mm ² 500 mm long without plu	ig connector		
	2. cable 14 x 0,25 mm ² (optional for grip function	n) 500 mm long without plug	connector	
	Optional with plug connector (standard plug connectors see page 127)			
0,52,54,5 V redundant + 2 c	irection signals + 1 zero position signal (galvanicall	y isolated) per axis		
		1 axis	E112 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
0510 V redundant + 2 direct	ion signals + 1 zero position signal (galvanically iso	lated) per axis, supply voltag	je 11,5 - 32 V DC	
		1 axis	E132 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
	s + 1 zero position signal (galvanically isolated) per	axis, supply voltage 11,5 - 3	2 V DC,	
sensor redundant with error mo	onitoring and error signal			
		1 axis	E136 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
		Output options Characteristic:		
		Inverse dual *1		1
		Dual *1		2
			e +/- 3° *1 (standard)	3
				4
		*1 Not combinable with output E136X		
			,	
		Single *2		5
		Single with dead zone +/- 3° *2 (standard) 6		6
		*2 Not combinable with our	tput E112X and E132X	
		Digital output signals:		
		Output signals standard:		
		Direction signals and zero position signals 1,5A 24 V DC 1		
*Axis for grip functions, interfac	e can vary depending upon actuation element!			
Voltage output with other value	on request!			




Current output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	60 mm			
Wiring	1. cable 14 x 0,25 mm ² 500 mm long	g without plug connector		
	2. cable 14 x 0,25 mm ² (optional for	grip function) 500 mm long without plug con	nector	
	Optional with plug connector (stand	lard plug connectors see page 127)		S
01020 mA + 2 direction s	ignals + 1 zero position signal (galvanicall	ly isolated) per axis, sensor redundant with er	ror monitoring	
and error signal				
		1 axis	E206 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
20020 mA + 2 direction s	ignals + 1 zero position signal (galvanicall	ly isolated) per axis, sensor redundant with er	ror monitoring	
and error signal				
		1 axis	E208 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
41220 mA + 2 direction s	ignals + 1 zero position signal (galvanicall	ly isolated) per axis, sensor redundant with er	ror monitoring	
and error signal				
		1 axis	E214 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
20420 mA + 2 direction s	ignals + 1 zero position signal (galvanicall	ly isolated) per axis, sensor redundant with er	ror monitoring	
and error signal				
		1 axis	E216 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
		Output options		
		Single	5	
		Single with dead zone +/- 3° (stand	ard) 6	
		Digital output signals:		
		Output signals standard:		
		Direction signals and zero position	signals 1,5A 24 V DC	1
*Axis for grip functions, inter	face can vary depending upon actuation e	element!		



Identification of the installation variants with switching directions:






CAN			
Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	Direction signal 100 mA		
	Zero position signal 100 mA		
	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
	Digital switching output (potential-free) 100 mA		
Mounting depth A	60 mm (expansion stage 1)		
	70 mm (expansion stage 2)		
Protocol	CANopen CiA DS 301 or SAE J1939 (based on)		
Baud rate	20 kBit/s to 1 Mbit/s (standard 250 kBit/s)		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	External in-/outputs cable 300 mm long without plug connector (additional from 32 in-/output	:s)	
	Optional with plug connector (standard plug connectors see page 127)		S
CAN expansion stage 1		E320 1	
- 6 analog joystick axis			
- 16 digital joystick functions	(of which 2 inputs can be used for the cap. sensor)		
CAN expansion stage 2		E321 1	
- 12 analog joystick axis			
- 16 digital joystick functions	(of which 2 inputs can be used for the cap. sensor)		
With additional external in-/o	utputs		
- 8 external LED-outputs (dim	mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	
- 16 external LED-outputs (di	mmable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs	3	
- 24 external LED-outputs (di	mmable), 1 switching output (potential-free, 100 mA), 24 external digital inputs	4	
- 32 external LED-outputs (di	mmable), 1 switching output (potential-free, 100 mA), 32 external digital inputs	5	
*External LED-outputs can be	e used for LEDs in the grip		
(Control of intelligent RGB LE	Ds possible on request)		
Main-axis with additional digi	tal outputs separately wired (not via CAN)		
- 2 direction signals per main	axis + 1 zero position signal (potential-free) per main axis		3



CAN Safety			
Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	Direction signal 100 mA		
	Zero position signal 100 mA (potential-free)		
	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
	Digital switching output (potential-free) 100 mA		
Baud rate	20 kBit/s to 1 MBit/s (standard 250 kBit/s)		
Mounting depth	60 mm (expansion stage 1)		
	70 mm (expansion stage 2)		
Protocol	CANopen Safety EN50325-5 or J1939-76		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	External in-/outputs cable 300 mm long without plug connector (additional from 32 in-/outputs)		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN Safety expansion stage	e 1	420 1	
- 6 analog joystick axis			
- 16 digital joystick functions	(of which 2 inputs can be used for the cap. sensor)		
(Control of intelligent RGB LE	Ds possible on request)		
CAN Safety expansion stage	e 2	E421 1	
- 12 analog joystick axis			
- 16 digital joystick functions	(of which 2 inputs can be used for the cap. sensor)		
With additional external in-/o	utputs		
- 8 external LED-outputs (dim	mable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	
- 16 external LED-outputs (di	mmable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs	3	
- 24 external LED-outputs (di	mmable optional), 1 switching output (potential-free, 100 mA), 24 external digital inputs	4	
- 32 external LED-outputs (di	mmable optional), 1 switching output (potential-free, 100 mA), 32* external digital inputs	5	
*External LED-outputs can be	e used for LEDs in the grip!		
(Control of intelligent RGB LE	Ds possible on request)		
Main-axis with additional digi	tal outputs separately wired (not via CAN)	_	
- 2 direction signals per main	axis		3



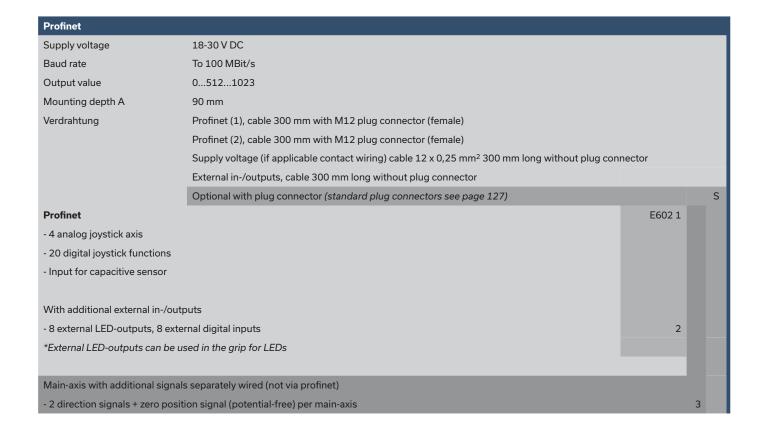




PROFIsafe			
Supply voltage	18-30 V DC		
Baud rate	To 12 MBit/s		
Output value	05121023		
Mounting depth A	90 mm		
Wiring	Profinet (1), cable 300 mm with M12 plug connector (female)		
	Profinet (2), cable 300 mm with M12 plug connector (female)		
	Supply voltage (if applicable contact wiring) cable 12 x 0,25 mm ² 300 mm long without plug con	nector	
	External in-/outputs, cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
PROFIsafe		E702 1	
- 4 analog joystick axis			
- 20 digital joystick functions			
- Input for capacitive sensor			
With additional external in-/out	puts		
- 8 external LED-outputs, 8 exte	rnal digital inputs	2	
*External LED-outputs can be us	sed in the grip for LEDs		
Main-axis with additional signals	s separately wired (not via profinet safe)		
- 2 direction signals + zero posit	ion signal (potential-free) per main-axis		3

Other outputs				
Voltage output for PVG32 0,2	250,50,75Us, power supply 9-32 V DC			
Option	Input for capacitive sensor			
Mounting depth A	60 mm			
Option I Mounting depth A G Wiring:	1. cable $14 \times 0.25 \text{ mm}^2$ 300 mm long without plug connector			
	2. cable $14 \times 0.25 \; \text{mm}^2$ $300 \; \text{mm}$ long without plug connector (optional for	grip function)		
	Optional with plug connector (standard plug connectors see page 127)			S
		1 axis	E907 1	
		2 axis	2	
		3 axis	3	
		4 axis	4	
Main-axis with additional direct	ction signals and zero direction signals (potential-free) per main-axis			3

Attachments		
Z01 Mating connector M12 male insert with 2 m cable	20201140	
Z02 Mating connector M12 female insert with 2 m cable	20202298	



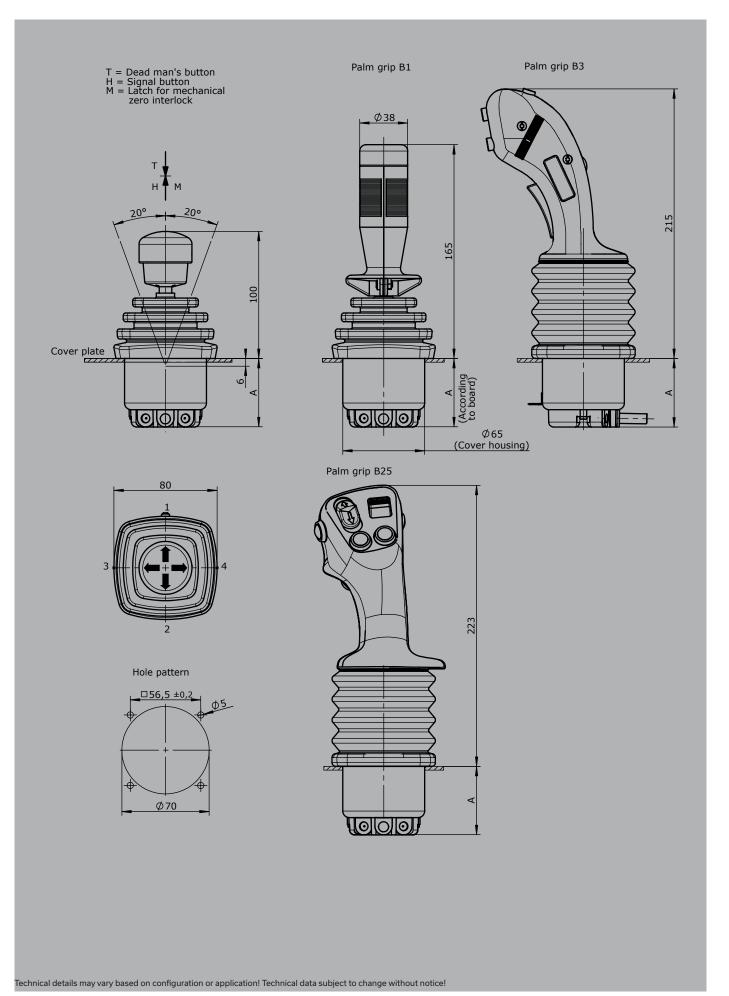



The Multi-Axis Controller V24 is designed as a driving joystick for construction and agricultural machinery. It has a parking position which can be inserted in the zero position. The V24 is characterized by its extremely rugged design. Long life and high reliability is ensured by the latest contactless hall-technology. Through its various interfaces and many possibilities of combination with our numerous ball grips the V24 is very flexible.

Technical data

Mechanical life V24 20 million operating cycles

Supply voltage See interface Operation temperature -40°C to +85°C Up to IP67 Degree of protection

PLd compatible (EN ISO 13849, complies SIL2 Functional safety

to DIN EN IEC 61508)



				Example					
		V24	P1	т	-R	-B10	-E	-S	-X
Basic ι	unit								
V24.1	Multi-Axis Controller, 1-axis								
V24L	Multi-Axis Controller, 1-axis with parking position left								
V24R	Multi-Axis Controller, 1-axis parking position right								
Gate									
P1	T-gate main axis axial (included in basic unit!)								
P2	T-gate main axis right outside								
P3	T-gate main axis left outside								
PX	Special gate								
Grip / I	Palm Grip								
	Knob (included in basic unit!)								
Т	Dead man								
Н	Signal button								
D	Push button								
В	Palm Grip B (see page Palm Grip 163)								
Main a	xis								
R	Friction brake adjustable (included in basic unit!)								
Degree	e of protection								
B10	Joystick-main board sealed (IP67)								
B11	Joystick-main board sealed (IP67) and grip function sealed,	grip with d	rain hole						
For a so	chematic description of the protection class (see page 128)								
Interfa	ce (description see on the following pages)	1							
E1xx	Voltage output								
E2xx	Current output								
ЕЗхх	CAN-interface								
E4xx	CAN Safety interface								
E9xx	Other outputs								
Plug co	onnectors								
S	Standard plug connectors (see page 127)								
Specia	l model								



Combination possibilities with our grips



				1			
Voltage output (not stabilized)							
Supply voltage	4,75-5,25 V DC						
Mounting depth A	60 mm						
Wiring	1. cable 14 x 0,25 mm ² 500 r	mm long without plu	g connector				
	2. cable 14 x 0,25 mm ² (option	onal for grip function) 500 mm long with	out plug connector			
	Optional with plug connecto	r (standard plug con	nectors see page 12	7)			S
0,52,54,5 V redundant							
			1 axis		E103 1		
			2 axis		2		
			Output options				
			Characteristic:				
			Inverse dual			1	
			Dual			2	
			Inverse dual with d	lead zone +/- 3° (standard)		3	
			Dual with dead zor	ne +/- 3°		4	

Voltage output				
Supply voltage	9-32 V DC (*11,5-32)			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	60 mm			
Option	Input for capacitive sensor			
Wiring	1. cable $14 \times 0.25 \text{ mm}^2$ 500 mm long without plu	ug connector		
	2. cable $14 \times 0.25 \text{ mm}^2$ (optional for grip function	n) 500 mm long without plug	connector	
	Optional with plug connector (standard plug con	nnectors see page 127)		S
0,52,54,5 V redundant + 2	direction signals + 1 zero position signal (galvanical	ly isolated) per axis		
		1 axis	E112 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
		5 axis*	5	
		6 axis*	6	
0510 V redundant + 2 direc	ction signals + 1 zero position signal (galvanically iso	plated) per axis, supply voltag	je 11,5 - 32 V DC	
		1 axis	E132 1	
		2 axis	2	

Technical details may vary based on configuration or application! Technical data subject to change without notice!



	3 axis*	3	
	4 axis*	4	
	5 axis*	5	
	6 axis*	6	
10010 V + 2 direction signals + 1 zero position signal (galvanically isolated) per	axis, supply voltage 11,5 - 3	2 V DC,	
sensor redundant with error monitoring and error signal			
	1 axis	E136 1	
	2 axis	2	
	3 axis*	3	
	4 axis*	4	
	5 axis*	5	
	6 axis*	6	
	Output options		
	Characteristic:		
	Inverse dual *1		1
	Dual *1		2
	Inverse dual with dead zone	e +/- 3° *1 (standard)	3
	Dual with dead zone +/- 3°		4
	*1 Not combinable with out		
	Not combinable with out	put L130X + L130X	
	Single *2		5
		tondord)	
	Single with dead zone *2 (s		6
	*2 Not combinable with out	put E112X and E132X	
*Axis for grip functions, interface can vary depending upon actuation element!			
Voltage output with other value on request!			

Current output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	60 mm			
Option	Input for capacitive sensor			
Wiring	1. cable 14 x 0,25 mm ² 500 mm long withou	t plug connector		
	2. cable $14 \times 0.25 \text{ mm}^2$ (optional for grip fun	ction) 500 mm long withou	t plug connector	
	Optional with plug connector (standard plug	connectors see page 127)		S
01020 mA + 2 direction sign	gnals + 1 zero position signal (galvanically isolate	ed) per axis, sensor redunda	ant with error monitoring	
and error signal				
		1 axis	E206 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
		5 axis*	5	
		6 axis*	6	
20020 mA + 2 direction sign	gnals + 1 zero position signal (galvanically isolate	ed) per axis, sensor redunda	ant with error monitoring	
and error signal				
		1 axis	E208 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
		5 axis*	5	
		6 axis*	6	



	alvanically isolated) per axis, sensor redundant with er	rror monitoring
and error signal		
	1 axis	E214 1
	2 axis	2
	3 axis*	3
	4 axis*	4
	5 axis*	5
	6 axis*	6
20420 mA + 2 direction signals + 1 zero position signal (g	alvanically isolated) per axis, sensor redundant with er	rror monitoring
and error signal		
	1 axis	E216 1
	2 axis	2
	3 axis*	3
	4 axis*	4
	5 axis*	5
	6 axis*	6
	Output options	
	Single	
	Single	

CAN			
Supply voltage	9-36 V DC		
Idle current consumption	120 mA		
Mounting depth A	60 mm		
Protocol	CANopen CiA DS 301 or SAE J 1939 (based on)		
Baud rate	125 kBit/s to 1 Mbit/s		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN		E325 1	
- 7 analog joystick axis			
- 16 digital joystick functions (o	f which 2 inputs can be used for the cap. sensor)		
*With the use of external inputs	s, the joystickfunctions are reduced by 7 pieces!		
- Output for vibrator control			
With additional external in-/out	puts		
- 8 external LED-outputs, 1 swit	tching output (potentialfree, 100 mA), 8 external digital inputs	2	
- 16 external LED-outputs, 1 sw	vitching output (potentialfree, 100 mA), 8 external digital inputs	3	
(Control of intelligent RGB LED	s possible on request)		
With additional digital outputs	for the main axis	_	
	sition signal (potential-free) per axis		3
Additional analog outputs on re			3
Additional analog outputs on re	equesti		




CAN Safety			
Supply voltage	9-36 V DC		
Idle current consumption	120 mA		
Mounting depth A	60 mm		
Protocol	CANopen Safety EN50325-5 or J1939-76		
Baud rate	125 kBit/s to 1 Mbit/s		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN Safety		E425 1	
- 7 analog joystick axis			
- 16 digital joystick functions (d	of which 2 inputs can be used for the cap. sensor)		
*With the use of external input	s, the joystickfunctions are reduced by 8 pieces!		
- Output for vibrator control			
With additional external in-/ou	touts		
	itching output (potentialfree, 100 mA), 8 external digital inputs	2	
	witching output (potentialfree, 100 mA), 8 external digital inputs	3	
(Control of intelligent RGB LED			
(
With additional digital outputs	for the main-axis		
- 2 direction signals + 1 zero po	osition signal (potential-free) per axis		3
Additional analog outputs on r	equest!		

Other outputs				
Voltage output for PVG32	0,250,50,75Us, power supply 9-32 V DC			
Mounting depth A	60 mm			
Option	Input for capacitive sensor			
Wiring:	1. cable 14 x 0,25 mm ² 300 mm long without plug connector			
	2. cable 14 x 0,25 mm ² 300 mm long without plug connector (optional fo	or grip function)		
	Optional with plug connector (standard plug connectors see page 127)			
		1 axis	E907 1	
		2 axis	2	
		3 axis	3	
		4 axis	4	
		5 axis	5	
		6 axis	6	
Action of the children of the contract	direction signals and zero direction signals (potential-free) per main-axis			3

Attachments	
Z01 Mating connector (CAN) M12 (male insert) with 2 m cable	20201140
Z02 Mating connector (CAN) M12 (female contact) with 2 m cable	20202298



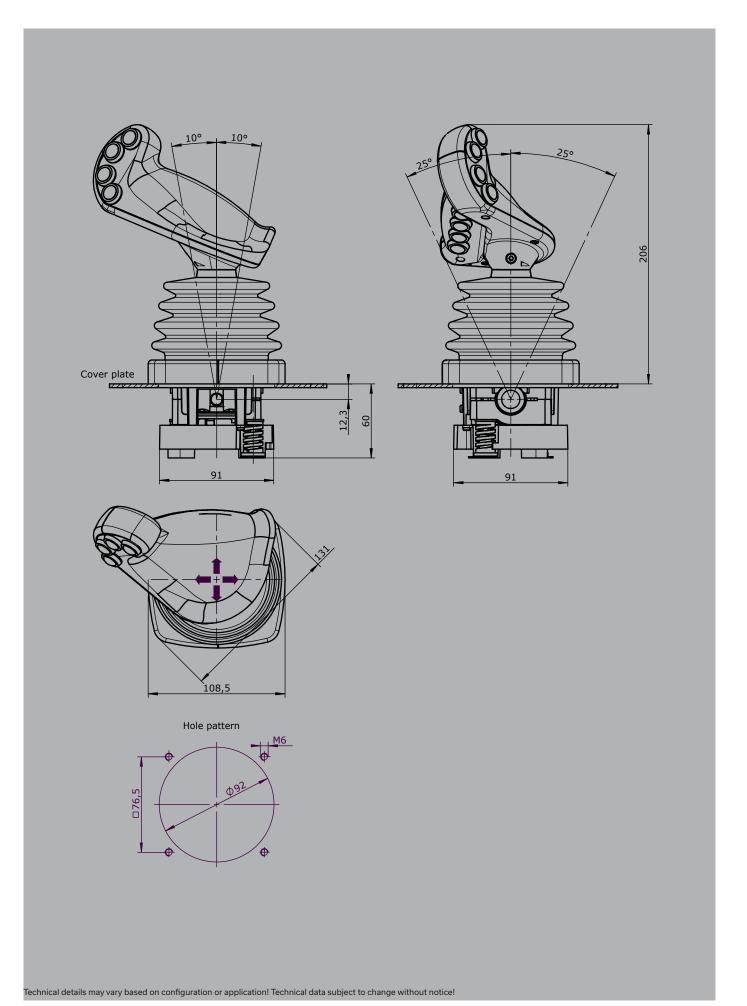



The V1 is a robust Joystick commonly used in electro-hydraulic applications. The modular design enables the switching device to be used universally. Long life and high reliability is ensured by the latest contactless hall-technology.

Technical data


Mechanical life V1 1 million operating cycles

Supply voltage See interface Operation temperature -40°C to +85°C Up to IP65 Degree of protection

PLd compatible (EN ISO 13849, complies SIL2 Functional safety

to DIN EN IEC 61508)




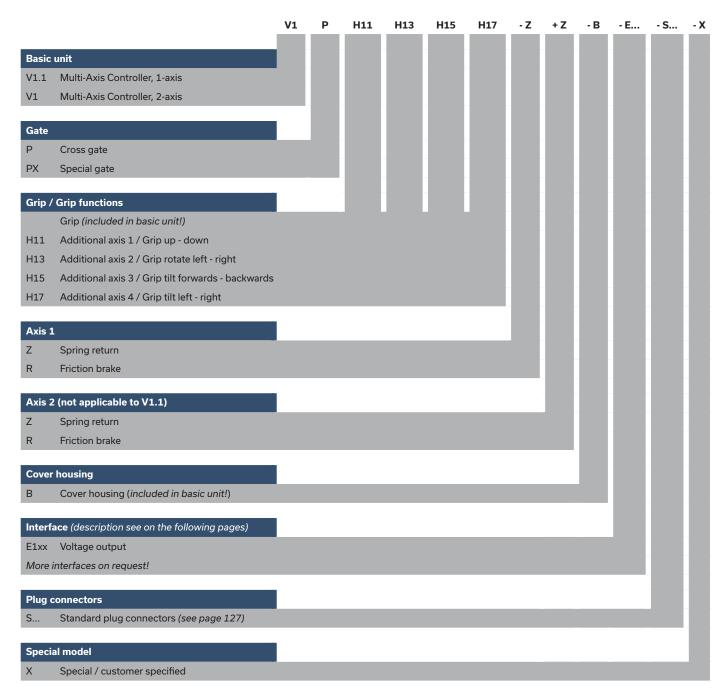






Voltage output (not stabilized)			
Supply voltage	4,75-5,25V DC			
Current carrying capacity	Direction signal 8 mA			
Mounting depth A	85 mm			
Wiring	1. cable $14 \times 0.25 \text{ mm}^2 500 \text{ mm}$ long without plu	g connector		
	Optional with plug connector (standard plug con	nectors see page 127)		S
0,52,54,5V redundant signa	als per axis			
		1 axis	E103 1	
		2 axis	2	
		3 axis*	3	
		4 axis*	4	
		5 axis*	5	
		6 axis*	6	
		Output options		
		Characteristic:		
		Inverse dual		1
		Dual		2
		Inverse dual with dead zone +/- 3° (standard)		3
		Dual with dead zone +/- 3°		4
More outputs on request!				



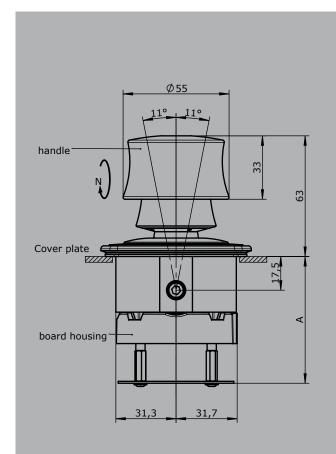

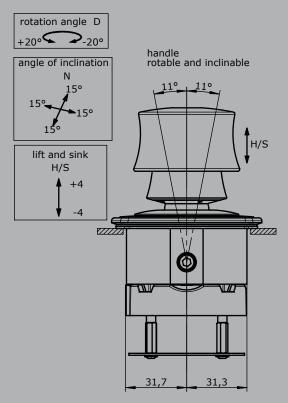



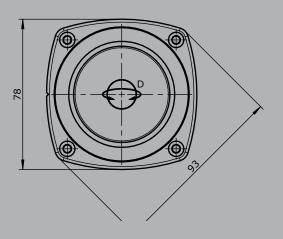





The Double-Handle Controller D85 is a robust switching device for electro hydraulic and hoisting applications. Long life and high reliability is ensured by the latest contactless hall-technology. The modular design enables the switching device to be used universally.

Technical data

Mechanical life D85 8 million operating cycles


Operation temperature -40°C to +85°C

Degree of protection IP54 front



Example D85 S5 Q Q -Z -B -S... -X +R -E... Basic unit D85 Double-Handle Controller Control-handle extended Standard 160 mm* S5 -20 mm S8 +20 mm *Only available in combination with handle! **Grip- control-handle left** Knob Μ Mechanical zero interlock Т Dead man Н Signal button D Push button Q T-grip QD T-grip with push button side B10.. Palm Grip B10... (see page 196) **Grip- control-handle right** See grip-control-handle left Axis 1: direction 1-2 left Ζ Spring return R Friction brake Axis 2: direction 3-4 left Spring return R Friction brake




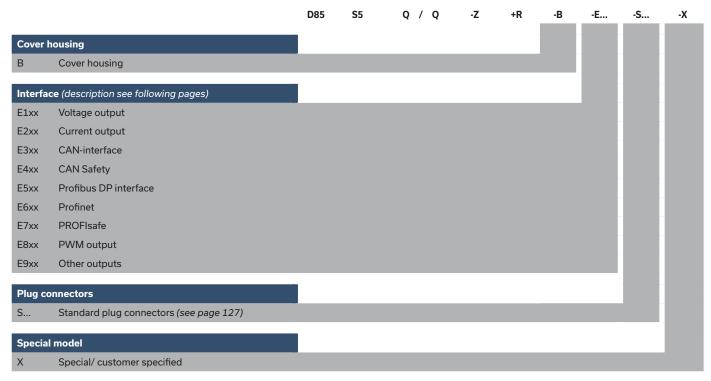

Combination possibilities with our handles



Digital output			
Supply voltage	9-32 V DC		
Current carrying capacity	Direction signal 150 mA		
	Zero position signal 500 mA		
Mounting depth A	85 mm		
Wiring	Cable 500mm long without plug connector		
	Optional with plug connector (standard plug connector)	ectors see page 127)	S
2 direction signals + 1 zero pos	ition signal (Galvanically isolated) per axis		
		2 axis	E001 2

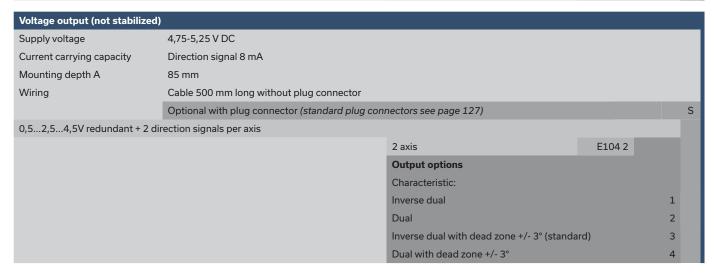



Voltage output				
Supply voltage	9-32 V DC (*11,5-32)			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	85 mm			
Option	Input for capacitive sensor			
Wiring	Cable 500 mm long without plug connec	tor		
	Optional with plug connector (standard p	olug connectors see page 127)		S
0,52,54,5 V redundant + 2	direction signals + 1 zero position signal (ga	lvanically isolated) per axis		
		2 axis	E112 2	
0510 V redundant + 2 dire	ection signals + 1 zero position signal (galvani	cally isolated) per axis, supply voltage 11,5 - 32 V D	С	
		2 axis	E132 2	
10010 V + 2 direction sign	nals + 1 zero position signal (galvanically isola	ted) per axis, supply voltage 11,5 - 32 V DC, sensor	redundant	
with error monitoring and err	or signal			
		2 axis	E136 2	
+10010 V + 2 direction si	gnals + 1 zero position signal (galvanically iso	lated) per axis, supply voltage 11,5 - 32 V DC, sens	or redundant	
with error monitoring				
		2 axis	E138 2	
		Output options		
		Characteristic:		
		Inverse dual *1		1
		Dual *1		2
		Inverse dual with dead zone +/- 3° *1 (star	ndard)	3
		Dual with dead zone +/- 3°*1		4
		*1 Not combinable with output E136X and	d E138X	
		Single *2		5
		Single with dead zone +/- 3° *2 (standard		6
		*2 Not combinable with output E112X and	d E132X	
		8: 11		
		Digital output signals:		
		Output signals standard:	4.54.041455	
		Direction signals and zero position signal	s 1,5A 24 V DC	1
Voltage output with other val	ue on request!			



Current output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	85 mm			
Option	Input for capacitive sensor			
Wiring	Cable 500 mm long without plug connector			
	Optional with plug connector (standard plug	connectors see page 127)		S
01020 mA + 2 direction signa	als + 1 zero position signal (galvanically isolated) per axis, sensor redundant with error monitoring	signal	
and error signal				-
		2 axis	E206 2	
20020 mA + 2 direction signa	als + 1 zero position signal (galvanically isolated) per axis, sensor redundant with error monitoring	ı	
and error signal				
		2 axis	E208 2	
41220 mA + 2 direction signa	als + 1 zero position signal (galvanically isolated) per axis, sensor redundant with error monitoring	3	
and error signal				
		2 axis	E214 2	
20420 mA + 2 direction signa	als + 1 zero position signal (galvanically isolated) per axis, sensor redundant with error monitoring	1	
and error signal				
		2 axis	E216 2	
+20020 mA + 2 direction sig	nals + 1 zero position signal (galvanically isolate	ed) per axis, sensor redundant with error monitori	ng	
and error signal				
		2 axis	E226 2	
		Output options		
		Single	5	
		Single with dead zone +/- 3° (standard)	6	
		Digital output signals:		
		Output signals tandard:		
		Direction signals and zero position signals 1,5A	24 V DC	1
Current output with other value of	on request!			

CAN	
Supply voltage	9-36 V DC
Idle current consumption	120 mA
Current carrying capacity	Direction signal 100 mA
	Zero position signal 100 mA
	External digital output for LEDs 5-30 mA (dependent on the number of LEDs)
	Digital switching output (potential-free) 100 mA
Mounting depth A	E3181: 85 mm
	E3181X: 105 mm
	E3191X - E3193X: 105 mm
	E3194X - E3195X: 125 mm
Protocol	CANOpen CiA DS 301 or SAE J 1939 (Based on)
Baud rate	125 kBit/s to 1 Mbit/s (standard 250 kBit/s)
Output value	2550255
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)
	CAN (OUT) cable 300 mm with plug connector M12 (female)
	External in-/outputs cable 300 mm without plug connector
	External in-/outputs cable 300 mm without plug connector (additionally from 32 in-/outputs)

Technical details may vary based on configuration or application! Technical data subject to change without notice!



Optional with plug connector (standard plug connectors see page 127)		S
CAN expansion stage 1	E318 1	_
- 8 analog joystick axis		_
- 16 digital joystick functions		_
- Input for capacitive sensor		
- Output for vibrator control		_
With additional external in-/outputs		_
- 8 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	
- 16 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 16* external digital inputs	3	_
*External LED-outputs can be used for LEDs in the grip		_
(Control of intelligent RGB LEDs possible on request)		_
*With the use of capacitive sensor, the external digital inputs are reduced by one input!		
		_
CAN expansion stage 2	E319 1	_
- 14 analog joystick axis		_
- 16 digital joystick functions		_
- 2 inputs for capacitive sensors		_
- Output for vibrator control		
		_
With additional external in-/outputs		
- 8 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	_
- 16 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 16 external digital inputs	3	_
- 24 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 24 external digital inputs	4	_
- 32 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 32* external digital inputs	5	
*External LED-outputs can be used for LEDs in the grip!		
(Control of intelligent RGB LEDs possible on request)		
Main-axis with additional digital-/analog outputs separately wired (not via CAN)		
- 2 direction signals + 1 zero position signal (potential-free) per main-axis		3
Additional analog outputs on request!		

CAN Safety	
Supply voltage	9-36 V DC
Idle current consumption	120 mA
Current carrying capacity	Direction signal 100 mA
	Zero position signal 100 mA
	External digital output for LEDs 5-30 mA (depending on the number of LEDs)
	Digital switching output (potential-free) 100 mA
Mounting depth A	E4181: 85 mm
	E4181X: 105 mm
	E4191X - E4193X: 105 mm
	E4194X - E4195X: 125 mm
Protocol	CAN Safety EN50325-5 or J1939-76
Baud rate	125 kBit/s to 1 MBit/s (standard 250 kBits)
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)
	CAN (OUT) cable 300 mm with plug connector M12 (female)
	External in-/outputs cable 300 mm without plug connector
	External in-/outputs cable 300 mm without plug connector (additionally from 32 in-/outputs)



Optional with plug connector (standard plug connectors see page 127)		S
CAN Safety expansion stage 1	E418 1	
- 8 analog joystick axis		
- 16 digital joystick functions		
- 1 Input for capacitive sensor		
- Output for vibrator control		
With additional external in-/outputs		
- 8 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	
- 16 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 16* external digital inputs	3	
External LED-outputs can be used in the grip for LEDs		
(Control of intelligent RGB LEDs possible on request)		
*With the use of capacitive sensor, the external digital inputs reduce by one input!		
CAN Safety expansion stage 2	E419 1	
- 14 analog joystick axis		
- 16 digital joystick functions		
- Output for vibrator control		
With additional external in-/outputs		
- 8 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 8 external digital inputs	2	
$-16\ external\ LED\text{-}outputs\ (dimmable\ optional),\ 1\ switching\ output\ (potential\text{-}free,\ 100\ mA),\ 16^*\ external\ digital\ inputs$	3	
- 24 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 24 external digital inputs	4	
- 32 external LED-outputs (dimmable optional), 1 switching output (potential-free, 100 mA), 32* external digital inputs	5	
External LED-outputs can be used in the grip for LEDs		
(Control of intelligent RGB LEDs possible on request)		
Main-axis with additional digital-/analog outputs separately wired (not via CAN)		
- 2 direction signals + 1 zero position signal (potential-free) per main-axis		3
Additional analog outputs on request!		

Profibus DP			
Supply voltage	18-30 V DC		
Baud rate	To 12 MBit/s		
Output value	0128255		
Mounting depth A	105 mm		
Wiring	Profibus, cable 100 mm with plug D-Sub 9		
	Supply voltage (if applicable contact wiring) cable 12 x 0,25 mm ² 300 mm long without plug con	nector	
	External in-/outputs, cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
Profibus DP		E501 1	
- 4 analog joystick axis			
- 16 digital joystick function			
- Input for capacitive sensor			
With additional external in-/outp	puts		
- 8 external LED-output, 8 extern	nal digital input	2	
- 16 external LED-output, 16 ext	ternal digital input	3	
External LED-outputs can be us	ed in the grip for LEDs		
Mith additional contact acuipm	ent separately wired (not via profibus)		
			1
	osition contact (not potential-free) per main-axis		1
- 1 zero position contact (potent	tial-free) per main-axis		2



Profinet				
Supply voltage	18-30 V DC			
Baud rate	To 100 MBit/s			
Output value	05121023			
Mounting depth A	105 mm			
Verdrahtung	Profinet (1), cable 300 mm with M12 plug connector (female)			
	Profinet (2), cable 300 mm with M12 plug connector (female)			
	Supply voltage (if applicable contact wiring) cable $12 \times 0.25 \text{ mm}^2 \times 300 \text{ mm}$ long without plug contact wiring)	nector)		
	External in-/outputs, cable 300 mm long without plug connector			
	Optional with plug connector (standard plug connectors see page 127)			S
Profinet		E603 1		
- 6 analog joystick axis				
- 24 digital joystick functions				
- Input for capacitive sensor				
With with additional external in-	-/outputs			
- 8 external LED-outputs, 8 exte	rnal digital inputs	2		
- 16 external LED-outputs, 16 ex	xternal digital inputs	3		
*External LED-outputs can be us	sed for LEDs in the grip!			
Main-axis with additional signal	s separately wired (not via profinet)			
- 2 direction signals + zero posit	ion signal (potential-free) per main-axis		3	

PROFIsafe			
Supply voltage	18-30 V DC		
Baud rate	To 12 MBit/s		
Output value	05121023		
Mounting depth A	105 mm		
Wiring	Profinet (1), cable 300 mm with M12 plug connector (female)		
	Profinet (2), cable 300 mm with M12 plug connector (female)		
	Supply voltage (if applicable contact wiring) cable $12 \times 0.25 \text{ mm}^2 \times 300 \text{ mm}$ long without plug contact wiring)	nector	
	External in-/outputs, cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
PROFIsafe		E703 1	
- 6 analog joystick axis			
- 24 digital joystick functions			
- Input for capacitive sensor			
With additional external in-/out	puts		
- 8 external LED-outputs, 8 exte	rnal digital inputs	2	
- 16 external LED-outputs, 16 ex	xternal digital inputs	3	
*External LED-outputs can be u	sed for LEDs in the grip!		
Main-axis with additional signal	s separately wired (not via profinet safe)		
- 2 direction signals + zero posit	ion signal (potential-free) per main-axis		3




PWM Outputs Supply Voltage: 9-32 V DC Valve control current: Max. 3 A PWM-frequency: 1225 Hz Dither frequency: 1...250 Hz adjustable Mounting depth A 85 mm Other features Creep speed per axis 5 configurable switching outputs 2A LED outputs for status indication Input for redundant deadman Wiring: Built-in socket Phoenix 2-pole (power supply) Cable 1 (PWM) 12 x 1 mm² 300 mm long without plug Cable 2 (switching output) 12 x 1 mm² 300 mm long without plug Cable 3 (Creep speed / dead man) 14 x 0,25 mm² 300mm long without plug Optional with plug connector (standard plug connectors see page 127) S E801 2 PWM Output 0-3 A for 2 proportional valve magnets per axis 2 axis

Other outputs				
Voltage output for PVG32 0,25.	0,50,75 Us, power supply 9-32 V DC			
Option	Input for capacitive sensor			
Wiring	Cable 14 x 0,25 mm ² 300 mm long without plug connector			
	Optional with plug connector (standard plug connectors see page 127)			S
		2 axis	E907 2	
Main-axis with additional direction	on contacts per main-axis		4	
8 Bit Gray-Code with direction si	gnals per main-axis, supply voltage 9-36 V DC			
Wiring:	Cable 37 x 0,14 mm ² 300 mm long without plug connector (axis 1+2)			
	Optional with plug connector (standard plug connectors see page 127)			S
		2 axis	E903 2	
8 Bit Binär-Code with direction s	ignals per main-axis, supply voltage 9-36 V DC			
Wiring:	Cable 37 x 0,14 mm ² 300 mm long without plug connector (axis 1+2)			
	Optional with plug connector (standard plug connectors see page 127)			S
		2 axis	E904 2	

Attachments	
Z01 Mating connector (CAN) M12 (male insert) with 2 m cable	20201140
Z02 Mating connector (CAN) M12 (female contact) with 2 m cable	20202298
Z03 Mating connector (Profibus) straight	22201440
Z04 Mating connector (Profibus) 90° angled	22201741
Z05 Mating connector (Profinet) M12 (male insert) with 2 m cable	5300000222



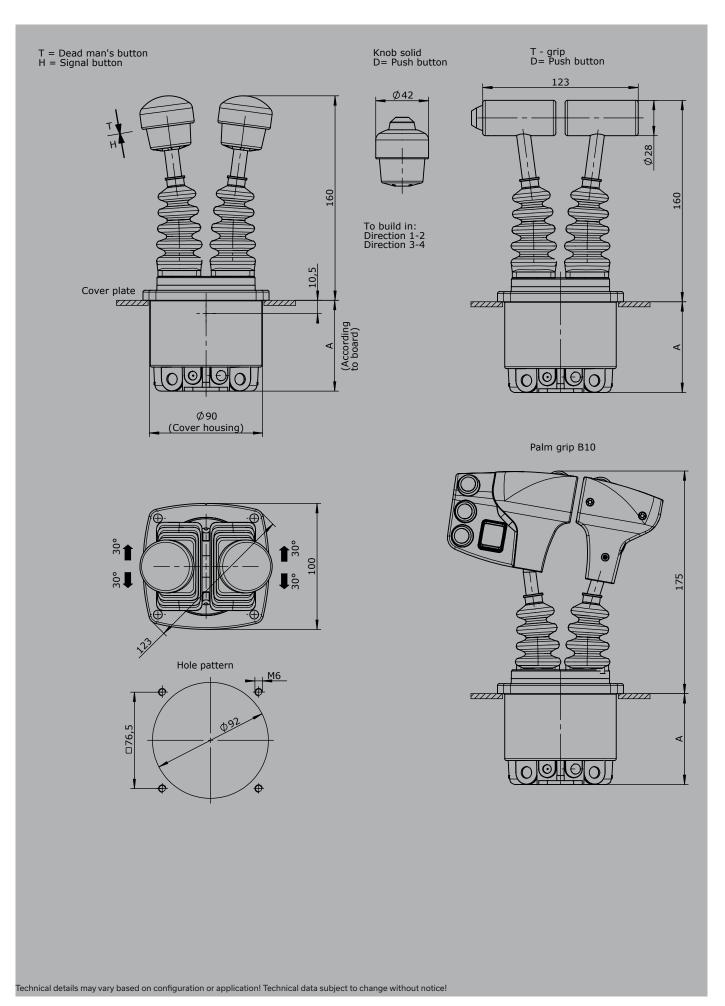





The V28 is a compact joystick commonly used in electro-hydraulic applications. Long life and high reliability is ensured by the latest contactless hall-technology. With many outputs and grip options the V28 series is hugely customisable.

Technical data


Mechanical life V28 5 million operating cycles

Supply voltage See interface Operation temperature -40°C to +85°C Up to IP67 Degree of protection

PLd compatible (EN ISO 13849, complies SIL2 Functional safety

to DIN EN IEC 61508)



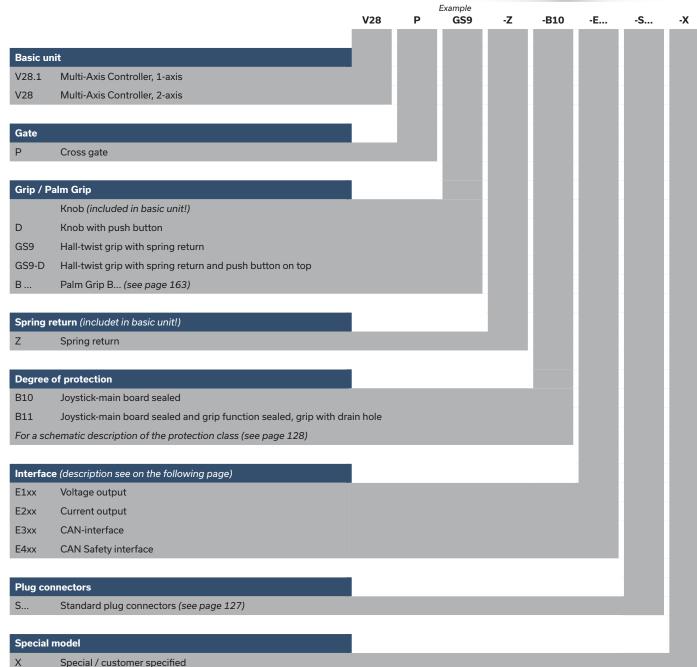



Combination possibilities with our grips



p. 204	p. 171	p. 169	p. 59				
Voltage outp	ut (Not stabilize	ed)					
Supply voltag	е	4,75-5,25 V DC					
Current carryi	ing capacity	Direction signal 8	3 mA				
Mounting dep	oth A	35 mm					
Wiring		1. cable 14 x 0,25	5 mm ² 500 mm lo	ng without plug	connector		
		2. cable 14 x 0,25	5 mm² (optional fo	or grip function)	500 mm long without plug connector		
		Optional with plu	g connector (star	dard plug conn	ectors see page 127)		9
0,52,54,5	V redundant				1 axis	E103 1	
					2 axis	2	
0,52,54,5	V redundant + 2	direction signals per	axis				
					1 axis	E104 1	
					2 axis	2	
					Output options		
					Characteristic:		
					Inverse dual		1
					Dual		2
					Inverse Dual with dead zone +/- 3° (standard)		3
					Dual with dead zone +/- 3°		4




Voltage output				
Supply voltage	9-32 V DC (*11,5-32)			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	35 mm			
Wiring	1. cable 14 x 0,25 mm ² 500 mm long without p	olug connector		
	2. cable 14 x 0,25 mm ² (optional for grip funct	cable 14 x 0,25 mm ² (optional for grip function) 500 mm long without plug connector		
	Optional with plug connector (standard plug c	onnectors see page 127)		S
0,52,54,5 V redundant + 2 d	irection signals + 1 zero position signal (galvanic	ally isolated) per axis		
		1 axis	E1121	
		2 axis	2	
		3 axis*	3	
0510 V 2 direction signals +	1 zero position signal (galvanically isolated) per	axis, supply voltage 11,5 - 32 V	/DC	
sensor redundant with error mo	nitoring			
		1 axis	E132 1	
		2 axis	2	
		3 axis*	3	
10010 V + 2 direction signal	s + 1 zero position signal (galvanically isolated) p	er axis, supply voltage 11,5 - 3	2 V DC,	
sensor redundant with error mo	nitoring			
		1 axis	E1361	
		2 axis	2	
		3 axis*	3	
		Output options		
		Characteristic:		
		Inverse dual *1		1
		Dual *1		2
		Inverse dual with dead zon	e +/- 3° *1 (standard)	3
		Dual with dead zone +/- 3°	*1	4
		*1 Not combinable with ou	tput E136X	
		Single *2		5
		Single with dead zone +/- 3	3° *2 (standard)	6
		*2 Not combinable with ou	tput E112X and E132X	
*Axis for grip functions, interfac	e can vary depending upon actuation element!			
Voltage output with other value	on request!			



Current output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Mounting depth A	35 mm			
Wiring	1. cable 14 x 0,25 mm ² 500 mm long with	out plug connector		
	2. cable 14 x 0,25 mm² (optional for grip for	unction) 500 mm long without	t plug connector	
	Optional with plug connector (standard pl	ug connectors see page 127)		S
01020 mA + 2 direction s	signals + 1 zero position signal (galvanically isola	ated) per axis, sensor redunda	nt with error monitoring	
		1 axis	E206 1	
		2 axis	2	
		3 axis*	3	
20020 mA + 2 direction s	signals + 1 zero position signal (galvanically isola	ated) per axis, sensor redunda	nt with error monitoring	
		1 axis	E208 1	
		2 axis	2	
		3 axis*	3	
41220 mA per axis, sens	or redundant with error monitoring			
		1 axis	E209 1	
		2 axis	2	
		3 axis*	3	
41220 mA + 2 direction s	signals + 1 zero position signal (galvanically isol	ated) per axis, sensor redunda	nt with error monitoring	
and error signal				
		1 axis	E214 1	
		2 axis	2	
		3 axis*	3	
20420 mA + 2 direction s	signals + 1 zero position signal (galvanically isola			
		1 axis	E216 1	
		2 axis	2	
		3 axis*	3	
		Output options		_
		Single		5
		Single		
		Single with dead zone +/-		6
*Axis for grip functions, inte	rface can vary depending upon actuation eleme	Single with dead zone +/-		6

Identification of the installation variants with switching directions:

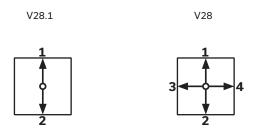




CAN			
Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
Mounting depth A	35 mm		
Protocol	CANopen CiA DS 301 or SAE J1939 (based on)		
Baud rate	20 kBit/s to 1 Mbit/s (standard 250 kBit/s)		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN		E322 1	
- 4 analog joystick axis			
- 8 digital joystick functions (inc	I. input for capacitive sensor)		
- Output for vibrator control			
With additional outputs			
- 8 LED-Outputs (dimmable opt	ional)	2	

CAN Safety			
Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
Baud rate	20 kBit/s to 1 MBit/s (standard 250 kBit/s)		
Mounting depth	35 mm		
Protocol	CANopen Safety EN50325-5 or J1939-76		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN Safety		E422 1	
- 4 analog joystick axis			
- 8 digital joystick functions (in	ncl. input for capacitive sensor)		
- Output for vibrator control			
With additional outputs			
- 8 LED-Outputs (dimmable op	otional)	2	

Attachments	
Z01 Mating connector M12 male insert with 2 m cable	20201140
Z02 Mating connector M12 female insert with 2 m cable	20202298



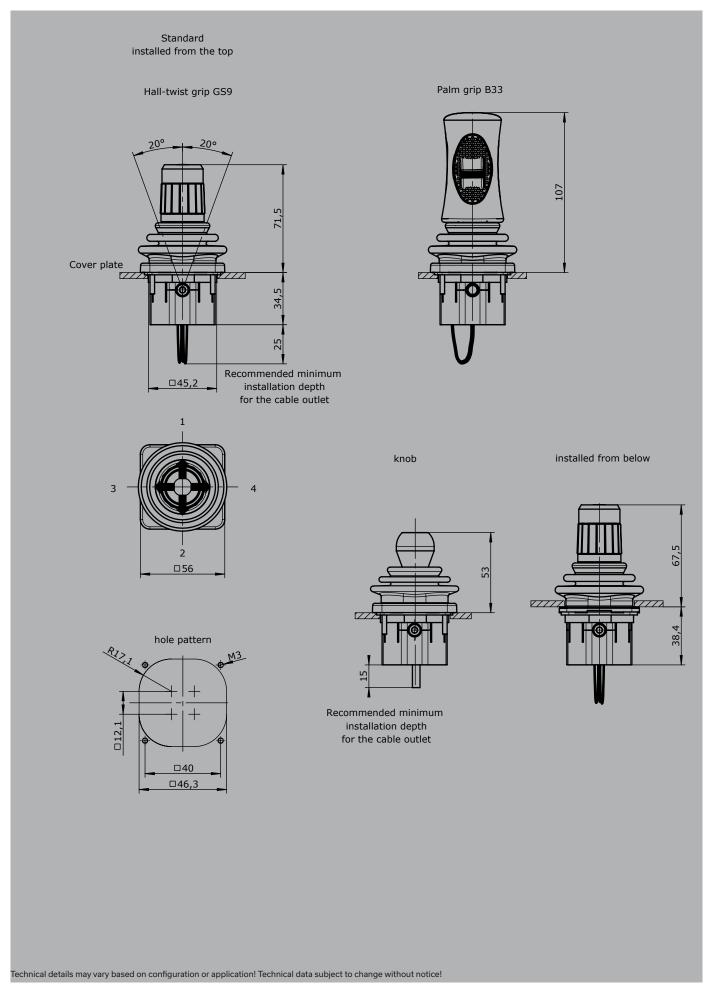





The Single-Axis Controller S26 is a hall sensor switching device designed for electro-hydraulic and remote controlled hydraulic. The modular design of the switching device is universally applicable.

Technical data

Mechanical life S26 6 million operating cycles

-40°C to +85°C Operating temperature


Degree of protection up to IP54, electronic assembly IP67

PLd compatible (EN ISO 13849, complies SIL2 to DIN EN IEC 61508) Functional safety



Example **S26** - Z - X Т - E... - S... Basic unit S26 Single-Axis Controller, 1-axis Grip / Palm Grip Knob M Mechanical zero interlock Т Dead man Н Signal button D Push button В... Palm Grip B... (on request!) Z Spring return R Friction brake **Interface** (description on the following pages) E0xx Digital output E1xx Voltage output E2xx Current output ЕЗхх **CAN-Interface** E4xx **CAN Safety Interface Plug connectors** Standard plug connectors (see page 127) Special model Special / customer specified

> Identification of the installation variants with switching directions:





Digital output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Wiring	Cable 500 mm long without plug connector			
	Optional with plug connector (standard plug co	onnectors see page 127)		S
2 direction signals + 1 zero pos	ition signal (galvanically isolated)			
		1 axis	E0011	

Voltage output (not stabilize	d)			
Supply voltage	4,75-5,25 V DC			
Current carrying capacity	Direction signal 8 mA			
Wiring	Cable 500 mm long without plug connector			
	Optional with plug connector (standard plug c	onnectors see page 127)		S
0,52,54,5 V redundant + 2	direction signals			
		1 axis	E1041	
		Output options		
		Characteristic:		
		Inverse dual		1
		Dual		2
		Inverse dual with dead zone +/- 3° (standard)		3
		Dual with dead zone +/- 3° *1		4

Voltage output				
Supply voltage	9-32 V DC (*11,5-32 V)			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Wiring	Cable 500 mm long without plug connector			
	Optional with plug connector (standard plug o	connectors see page 127)		S
0,52,54,5 V redundant + 2	2 direction signals + 1 zero position signal (galvanic	cally isolated)		
		1 axis	E112 1	
0510 V redundant + 2 dire	ection signals + 1 zero position signal (galvanically	isolated), supply voltage 11,5 - 32 V DC		
		1 axis	E132 1	
10010 V + 2 direction sign	nals + 1 zero position signal (galvanically isolated),	supply voltage 11,5 - 32 V DC, sensor redundant		
with error monitoring and err	or signal			
		1 axis	E136 1	
		Output options		
		Characteristic:		
		Inverse dual *1		1
		Dual *1		2
		Inverse dual with dead zone +/- 3° *1 (standard)		3
		Dual with dead zone +/- 3° *1		4
		*1 Not combinable with output E136X		
		Single *2		5
		Single with dead zone *2 (standard)		6




Current output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Wiring	Cable 500 mm long without plug connector			
	Optional with plug connector (standard plug connectors see page 12	7)		S
01020 mA + 2 direction sign	nals + 1 zero position signal (galvanically isolated), sensor redundant wit	n error monitoring and error sig	nal	
		1 axis	E206 1	
20020 mA + 2 direction sign	nals + 1 zero position signal (galvanically isolated), sensor redundant with	n error monitoring and error sig	nal	
		1 axis	E208 1	
41220 mA + 2 direction sign	nals + 1 zero position signal (galvanically isolated), sensor redundant wit	h error monitoring and error sig	nal	
		1 axis	E214 1	
20420 mA + 2 direction sign	nals + 1 zero position signal (galvanically isolated), sensor redundant wit	h error monitoring and error sig	nal	
		1 axis	E216 1	
		Output options		
		Single		5
		Single with dead zone +/-3° (s	standard)	6
Current output with other value	on request!			

CAN			
Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
Mounting depth A	35 mm		
Protocol	CANopen CiA DS 301 or SAE J1939 (based on)		
Baud rate	20 kBit/s to 1 Mbit/s (standard 250 kBit/s)		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN		E322 1	
- 3 analog joystick axis			
- 8 digital joystick functions (incl. input for capacitive sensor)			
- Output for vibrator control			
With additional outputs			
- 8 LED-Outputs (dimmable optional)		2	



CAN Safety			
Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
Baud rate	20 kBit/s to 1 MBit/s (standard 250 kBit/s)		
Mounting depth	35 mm		
Protocol	CANopen Safety EN50325-5 or J1939-76		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN Safety		E422 1	
- 3 analog joystick axis			
- 8 digital joystick functions (inc	cl. input for capacitive sensor)		
- Output for vibrator control			
With additional outputs			
- 8 LED-Outputs (dimmable op	tional)	2	



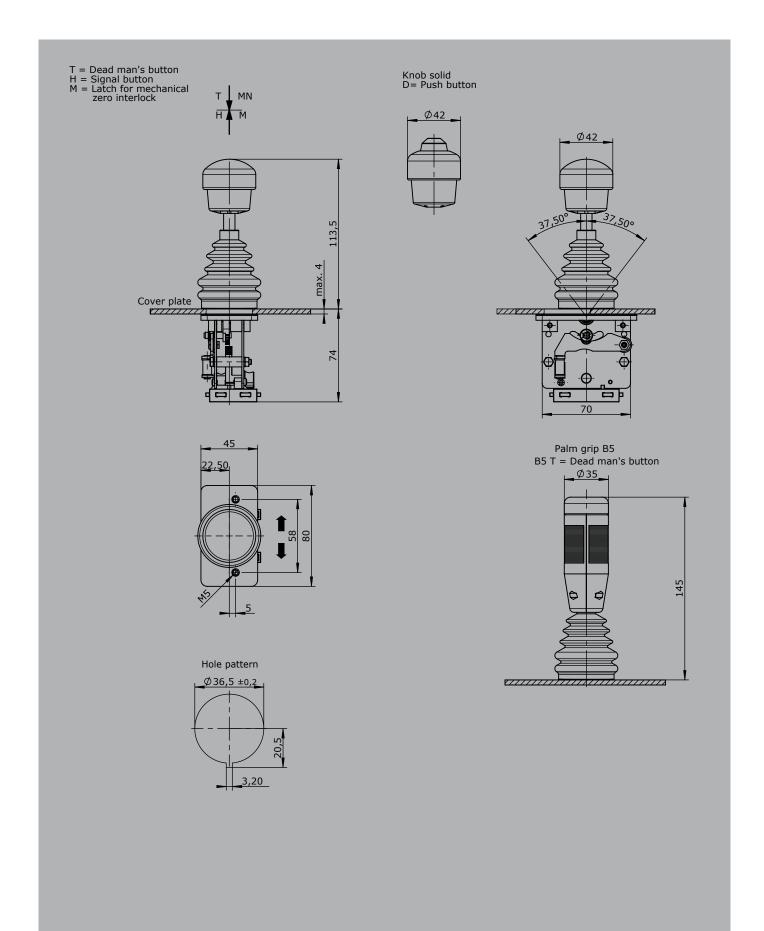



The V22 is a joystick commonly used in electro-hydraulic applications. Long life and high reliability is ensured by the latest contactless hall-technology.

Technical data

Mechanical life V22 3 million operating cycles

-40°C to +85°C Operation temperature IP67 front Degree of protection

PLd compatible (EN ISO 13849, complies SIL2 Functional safety


to DIN EN IEC 61508)



Example V22A -E10321 .P D **Basic unit** V22.1A Multi-Axis Controller, 1-axis with spring return, installation from below V22A Multi-Axis Controller, 2-axis with spring return, installation from below V22.1B Multi-Axis Controller, 1-axis with spring return, installation from top V22B Multi-Axis Controller, 2-axis with spring return, installation from top Gate Р Cross gate PXSpecial gate Grip Knob (standard) D Push button GS9 Hall-twist grip with spring return Hall-twist grip with spring return and push button on top GS9-D Interface Voltage output E103 1 0,5...2,5...4,5 V redundant, Ub= 5 V 1 axis 2 axis 2 Characteristic: Inverse dual (standard) 1 Dual Special model Special / customer specified

Attachments	
Mating connector JST 8-pole	5300000260
Mating connector JST 8-pole with single wire 500 mm long	5300000261



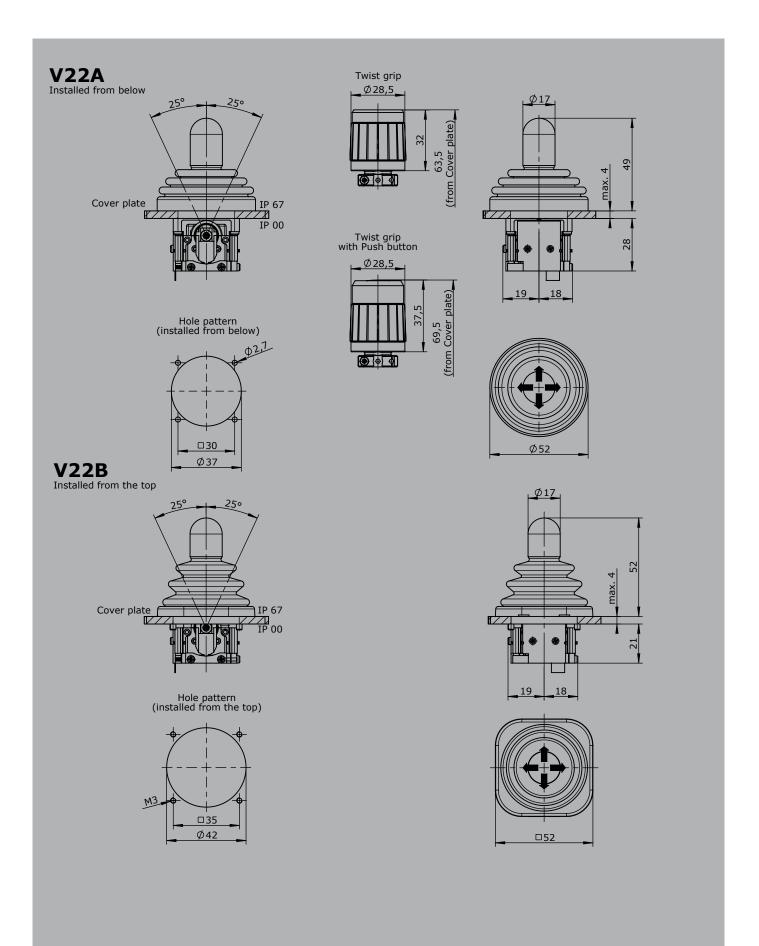





The S11 is a one-axis joystick designed for electro-hydraulic and remote controlled hydraulic. Long life and high reliability is ensured by the latest contactless hall-technology. The modular design of the switching device is universally applicable.

Technical data

Mechanical life S11 6 million operating cycles

Operating temperature -40°C to +85°C

Degree of protection Up to IP65, electronic assembly IP67

Functional safety
PLd compatible (EN ISO 13849, complies SIL2


to EN IEC 61508)



Example

S11 Т - Z - E... - S... - X Basic unit S11 Single-Axis Controller, 1-axis Grip / Palm Grip Knob (standard) M Mechanical zero interlock Т Dead man D Push button GS8 Knob GS8 Ζ Spring return (included in basic unit!) R Friction brake **Interface** (description on the following page) E0xx Digital output E1xx Voltage output E2xx Current output ЕЗхх **CAN-Interface** CAN Safety Interface E4xx Plug connectors Standard plug connectors (see page 127) Special model Special / customer specified

Identification of the installation variants with switching directions:




Technical details may vary based on configuration or application! Technical data subject to change without notice!



Digital Output		
Supply voltage	9-32 V DC	
Current carrying capacity	Direction signal 150 mA	
	Zero position signal 500 mA	
Wiring	Cable 500 mm long without plug connector	
	Optional with plug connector (standard plug connectors see page 127)	S
Cable 500mm long with plug (male)		
	1 axis	E0011

Voltage output (not stabilized)				
Supply voltage	4,75-5,25 V DC			
Current carrying capacity	Direction signal 8 mA			
Wiring	Cable 500 mm long without plug connector			
	Optional with plug connector (standard plug connectors see page 127)			S
0,52,54,5V redundant + 2 direction signal	ls			
		1 axis	E104 1	
		Output options		
		Characteristic:		
		Inverse dual		1
		Dual		2
		Inverse dual with dead zone +/- 3° (standard)		3
		Dual with dead zone +/- 3°		4

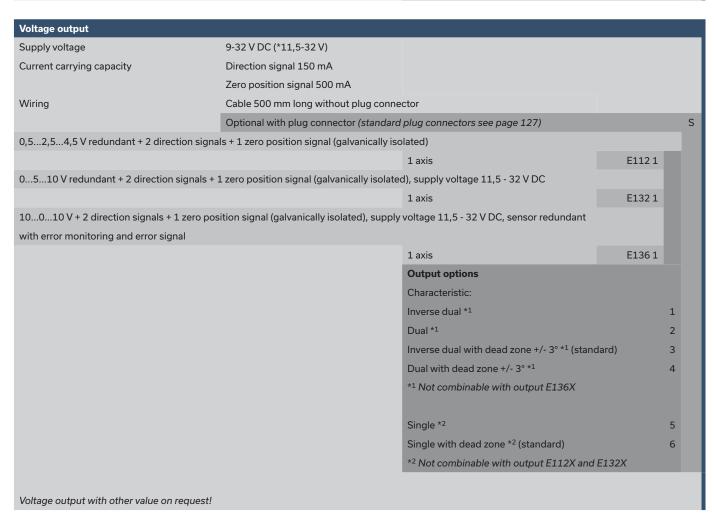




Current output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Wiring	Cable 500 mm long without plug connector			
	Optional with plug connector (standard plug connectors see page	ge 127)		S
01020 mA + 2 direction sig	nals + 1 zero position signal (galvanically isolated), sensor redund	ant with error monitoring and	error signal	
		1 axis	E206 1	
20020 mA + 2 direction sig	nals + 1 zero position signal (galvanically isolated), sensor redund	ant with error monitoring and	error signal	
		1 axis	E208 1	
41220 mA + 2 direction sig	nals + 1 zero position signal (galvanically isolated), sensor redund	ant with error monitoring and	error signal	
		1 axis	E214 1	
20420 mA + 2 direction sig	nals + 1 zero position signal (galvanically isolated), sensor redund	ant with error monitoring and	error signal	
		1 axis	E216 1	
		Output options		
		Single		5
		Single with dead zone +/-3°	(standard)	6
Voltage output with other valu	e on request!			

CAN			
Supply voltage	9-32 V DC		
Idle current consumption	120 mA (24 V DC)		
Current carrying capacity	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)		
Mounting depth A	35 mm		
Protocol	CANopen CiA DS 301 or SAE J1939 (based on)		
Baud rate	20 kBit/s to 1 Mbit/s (standard 250 kBit/s)		
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)		
	CAN (OUT) cable 300 mm with plug connector M12 (female)		
	External in-/outputs cable 300 mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
CAN		E322 1	
- 3 analog joystick axis			
- 8 digital joystick functions (inc	l. input for capacitive sensor)		
- Output for vibrator control			
With additional outputs			
- 8 LED-Outputs (dimmable opt	ional)	2	



CAN Safety		
Supply voltage	9-32 V DC	
Idle current consumption	120 mA (24 V DC)	
Current carrying capacity	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)	
Baud rate	20 kBit/s to 1 MBit/s (standard 250 kBit/s)	
Mounting depth	35 mm	
Protocol	CANopen Safety EN50325-5 or J1939-76	
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)	
	CAN (OUT) cable 300 mm with plug connector M12 (female)	
	External in-/outputs cable 300 mm long without plug connector	
	Optional with plug connector (standard plug connectors see page 127)	S
CAN Safety		E422 1
- 3 analog joystick axis		_
- 8 digital joystick functions (inc	cl. input for capacitive sensor)	_
- Output for vibrator control		_
		_
With additional outputs		
- 8 LED-Outputs (dimmable opt	tional)	2



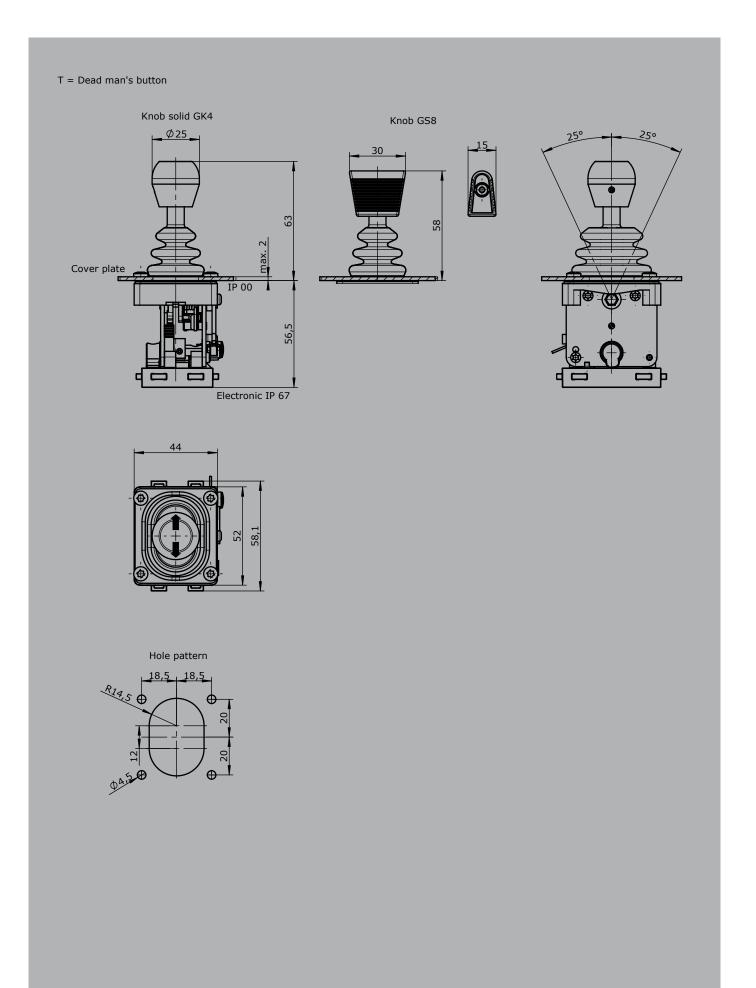





The V8/VV8 is a robust joystick commonly used in electro-hydraulic applications. With many output options including voltage, amperage and switch contacts and many grip options the V8 / VV8 series is hugely customisable.


Technical data

Mechanical life V8 10 million operating cycles

Mechanical life VV8 20 million operating cycles

Operation temperature -40°C to +85°C
Degree of protection Up to IP54



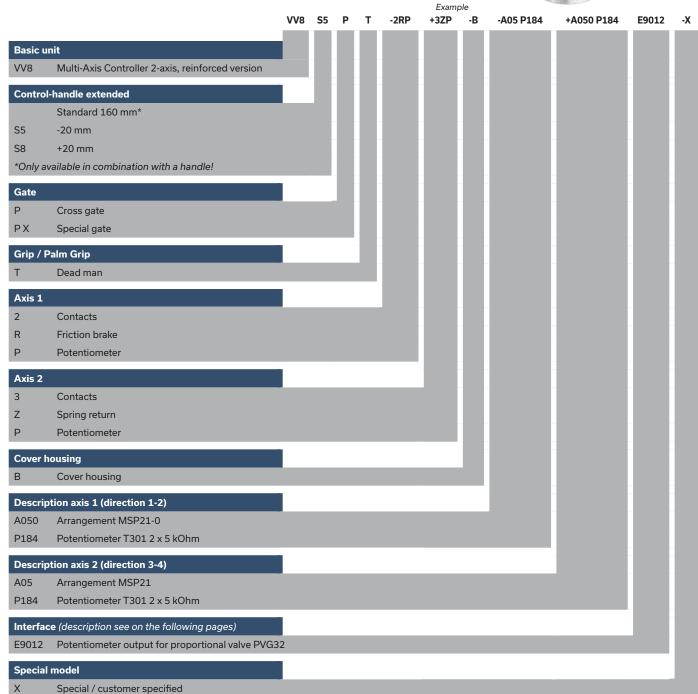





B1	_		<u> </u>					
p. 192 p. 190 p. 188 p. 186 p. 183 p. 181 p. 177 p. 177 p. 175 B31 B32 B33 B34 B35 B36 B36								
						1		
p. 173 p. 171 p. 169 p. 167 p. 165 p. 163	4	В32 р. 171	B33	B34	B35	B36		

VVO	33		-2 R F	-	3 4 F	-Б	AU3 P104	-	AUSU	P 104	ESUIZ	-	^

V81	1-axis
V8	2-axis
	reinforced version

VV81 1-axis VV8 2-axis

Basic unit

Control-handle extended

S5 -20 mm S8 +20 mm

Gate

P Cross gateP X Special gate

Grip/ Palm Grip

Knob (included in basic unit!)

M Mechanical zero interlock

MH Mechanical zero interlock + signal contact

T Dead man

H Signal button

D Push button

DV Flush push button

B... Palm Grip B... (see page Palm Grip 163)

Axis 1: direction 1-2

1	1 contact	Standard contact - ar	rangement see page 12	29
2	2 contacts	e.g.		
3	3 contacts	A98	MS0	Zero position contact
		A05	MS21	Direction contacts
		A050	MS21-0	Direction contacts + zero position contact

Z Spring return


R Friction brake only available with a VV8!

Technical details may vary based on configuration or application! Technical data subject to change without notice!



A050 P184

E9012 - X

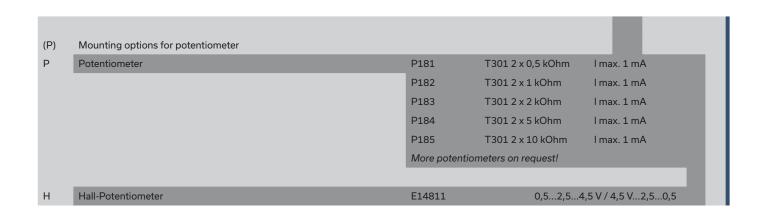

-2 R P

3 Z P

A05

P184


VV8 S5

Axis 2	: direction 3-4 (not applied for V81/V	/81)				
1	1 contact	Standard contact -	arrangement se	ee page :	129	
2	2 contacts	e.g.				
3	3 contacts	A98	MS0		Zero position contact	
		A05	MS21		Direction contacts	
		A050	MS21-0		Direction contacts + zero position	on contact
Z	Spring return					
R	Friction brake only available with a V	V8!				
(P)	Mounting options for potentiometer					
Р	Potentiometer			P181	T301 2 x 0,5 kOhm	max. 1 mA
				P182	T301 2 x 1 kOhm	max. 1 mA
				P183	T301 2 x 2 kOhm	max. 1 mA
				P184	T301 2 x 5 kOhm	max. 1 mA
				P185	T301 2 x 10 kOhm	max. 1 mA
				More p	ootentiometers on request!	
Н	Hall-Potentiometer			E1481	1 0,52,54,5	V/4,5V2,50,5

			VV8	S5	P	Т	-2 R P	+	3 Z P	-В	-	A05 P184	+	A050 P184	E9012	-	X
Cover l	housi	ng															
В	Cov	er housing															
			_														
Interfa	се																
		Potentiometer output															
E901		Potentiometer output for propo	rtional	valve	PVG3	32											
		0,250,50,75 Us															
	1				1 ax	is											
	2				2 ax	is											
	3				3 ах	is											
	4				4 ax	is											
Special	l mod	lel															
Χ	Spe	cial / customer specified															

Multi-Axis Controller V8 / VV8



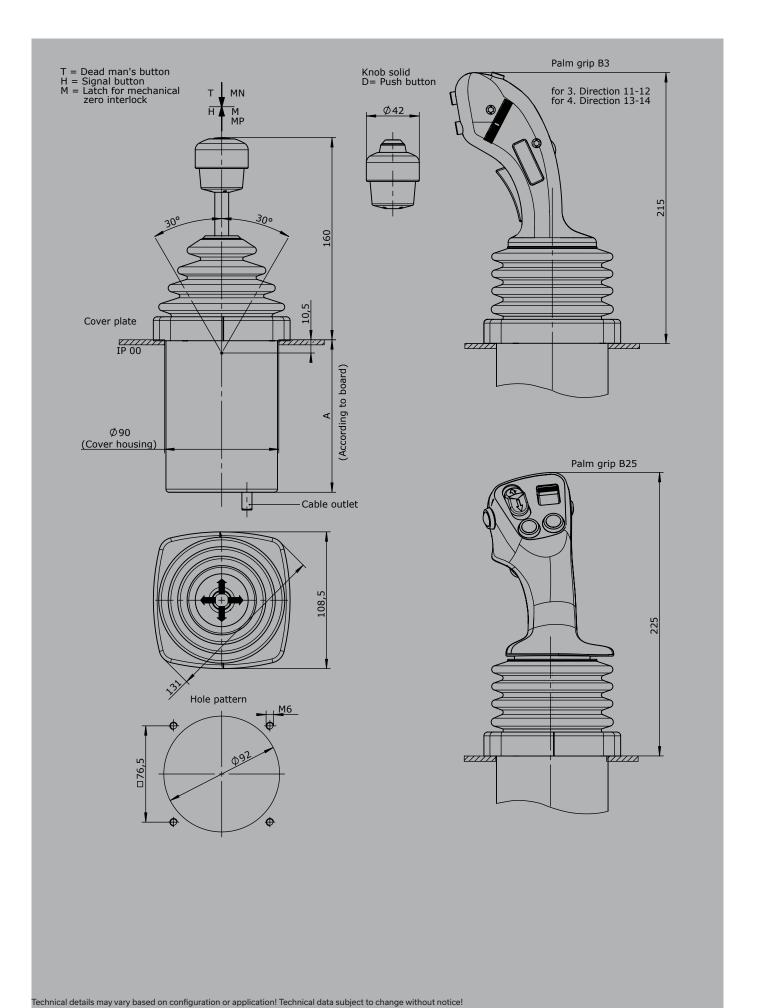



GESSMANN

The Multi-Axis Controller V6 / VV6 is a robust switching device designed for crane systems and hoisting equipment. The modular design and the many possible combinations with our Palm Grips make this joystick universally applicable.


Technical data

Mechanical life V6 10 million operating cycles

Mechanical life VV6 20 million operating cycles

Operation temperature $-40^{\circ}\text{C to } +85^{\circ}\text{C}$ Degree of protection Up to IP54 front



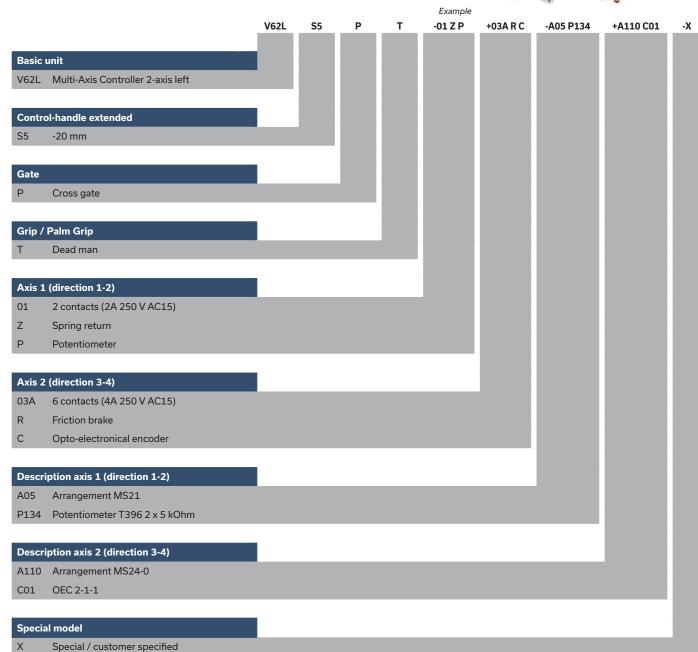

Multi-Axis Controller V6/VV6

E55MA





V62L S5 Р Т -01 Z P +03A R C -A05 P134 +A110 C01 -X

Basic unit V61L 1-axis left V61R 1-axis right V61.1 1-axis V64.1 1-axis 2-axis left V62L V62R 2-axis right V64 2-axis

	reinforced version
VV61L	1-axis left
VV61R	1-axis right
VV61.1	1-axis
VV64.1	1-axis
VV62L	2-axis left
VV62R	2-axis right
VV64	2 axis

Control-handle extended

Standard 180 mm*


S3 -40 mm -20 mm S5 S8 +20 mm

*Only available in combination with a handle!

Gate

Р	Cross gate
РΧ	Special gate


Identification of the installation variants with switching directions:






V61L/VV61L

V61R/VV61R






V62L/VV62L


V62R/VV62R





V64.1/VV64.1

V61.1/VV61.1



V64/VV64




Т -01 Z P +03A R C -A05 P134 +A110 C01 V62L S5 Grip / Palm Grip Knob (included in basic unit!) Μ Mechanical zero interlock MN Mechanical zero interlock (push down) Т Dead man MT* Mechanical zero interlock + dead man Н Signal button МН Mechanical zero interlock + signal button D Push button MD* Mechanical zero interlock + push button DV Flush push button MDV* Mechanical zero interlock + flush push button *Only possible with VV6! Palm Grip B... (see Palm Grip page 163) Attention! When using some handles the deflection angle can be reduced to 28°!

			V62L	S5	Р	Т	-01 Z P	+03A R C	-A05 P134	+A110 C01	-)
Axis	1: di	irection 1-2 left / direction 5-6 right									
		(Standard contacts gold-plated 2A 250 V	AC15)				_				
01		2 contacts		Standar	d conta	ct - arrar	ngement see į	page 129			
02		4 contacts		z.B.							
03		6 contacts		A980			MS00				
04		8 contacts		A05			MS21				
05		10 contacts		A0500			MS21-00				
06		12 contacts		A110			MS24-0				
	A =:	silver contacts (4A 250V AC15)		А99 со	ntact - a	rrangem	ent according	customer reques	it .		
Z R (P)	Fric	ing return tion brake sibility of mounting potentiometer and enc	oder (Ges	ssmann-i	types)						
Р	Pote	entiometer		P131		T396 2	x 0,5 kOhm	l max. 1 mA			
				P132		T396 2	x 1 kOhm	l max. 1 mA			
				P133		T396 2	x 2 kOhm	l max. 1 mA			
				P134		T396 2	x 5 kOhm	l max. 1 mA			
				P135		T396 2	x 10 kOhm	l max. 1 mA			
				More po	otention	neters or	request!				
С	Enc	oder		C Enc	oder see	e page 1	37				



V62L S5 P -01 Z P +03A R C -A05 P134 +A110 C01 -X Axis 2: direction 3-4 left / Direction 7-8 right (not applicable for V/VV61, V/VV61.1, V/VV64.1) (Standard contacts gold-plated 2A 250 V AC15) 01 2 contacts Standard contact - arrangement see page 129 02 4 contacts z.B. 03 6 contacts A980 MS00 MS21 04 8 contacts A05 05 10 contacts A0500 MS21-00 06 12 contacts A110 MS24-0 A = Silver contacts (4A 250 V AC15) A99 contact - arrangement according customer request Ζ Spring return R Friction brake (P) Possibility of mounting potentiometer and encoder (Gessmann-types) Р Potentiometer P131 T396 2 x 0,5 kOhm I max. 1 mA P132 T396 2 x 1 kOhm I max. 1 mA P133 T396 2 x 2 kOhm I max. 1 mA P134 T396 2 x 5 kOhm I max. 1 mA P135 T396 2 x 10 kOhm I max. 1 mA More potentiometers on request! Encoder C... Encoder see page 137 V62L S5 Р Т -01 Z P +03A R C -A05 P134 +A110 C01 -X Special model Special /customer specified **Attachments** Indicating labels Indicating labels with engraving



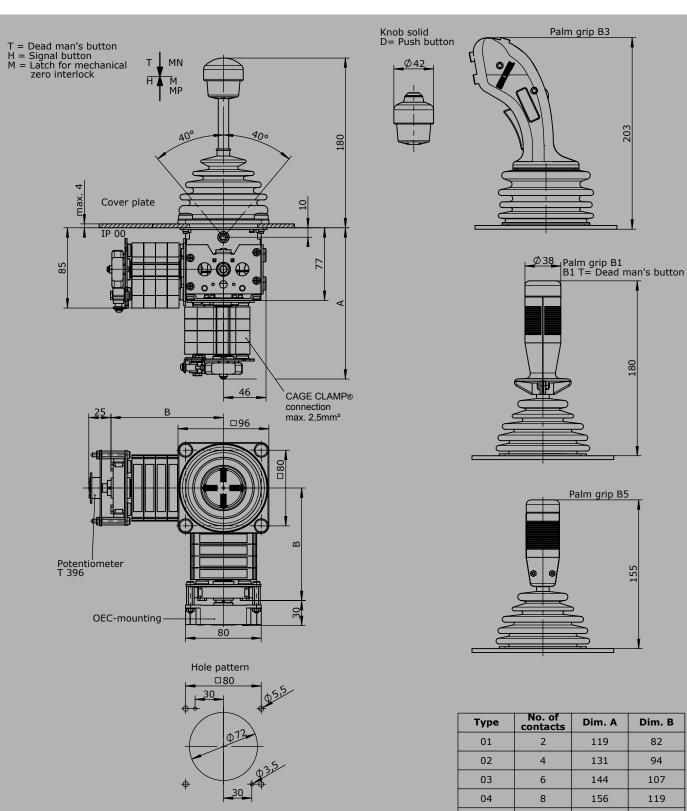

Туре	No. of contacts	Dim. A	Dim. B
01	2	119	82
02	4	131	94
03	6	144	107
04	8	156	119
05	10	169	132
06	12	181	144





The Multi-Axis Controller VA6 is available in either single-axis or multi-axis options and is a robust explosion proof controller commonly used in crane and hoisting applications. The modular design enables the switching device to be used universally.

Technical data

Mechanical life VA6 10 million operating cycles

Operation temperature -40°C to +85°C

Degree of protection IP54 front

IP66 (microswitch and poteniometer)

Identifications (£x) II 2G IIC T5 or T6


⟨**ξ**χ⟩ II 2D T85° or T95°C

Group of devices

Equipment category 2D and 2G


Certificate OBAC 17 ATEX 0126X



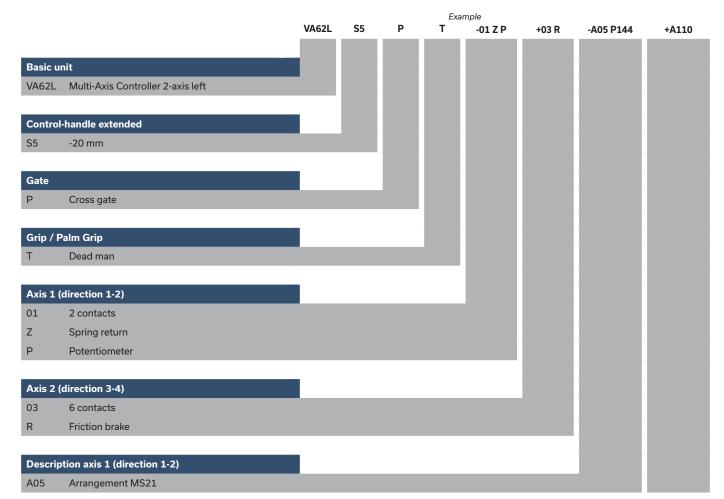





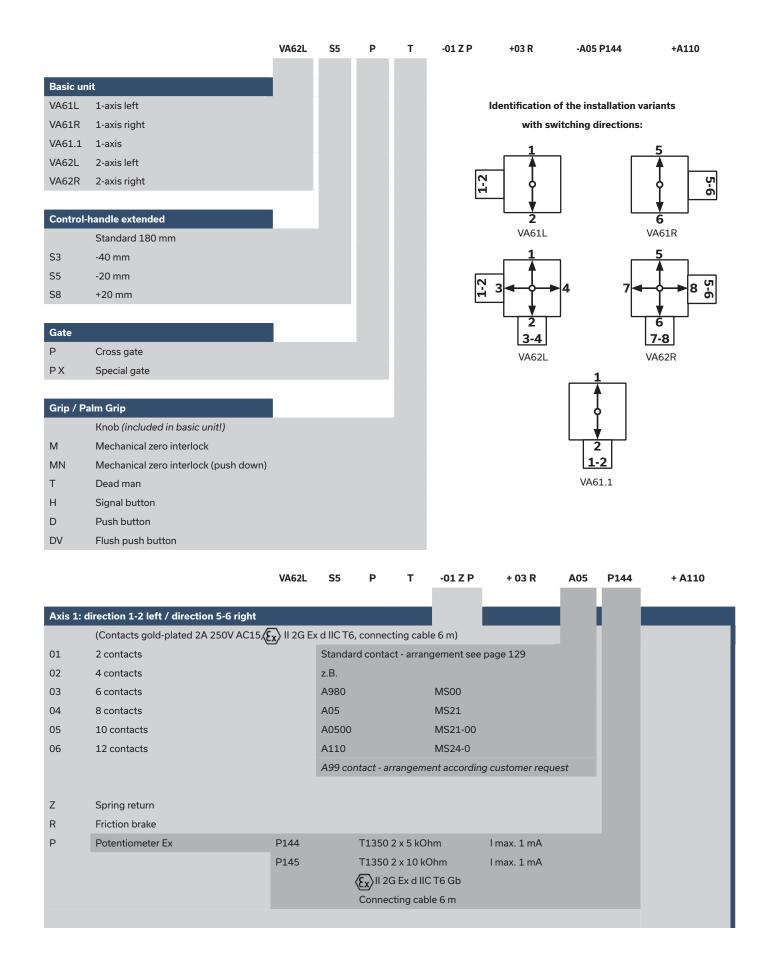







		VA62L	S5	P	Т	-01 Z P	+03 R	-A05 P144	+A110			
Axis	: 2: direction 3-4 left / Direction 7-8 right					(Not applicable for VA	.61, VA61.1)					
	(Contacts gold-plated 2A 250 V AC15, x II 2G Ex c	l IIC T6, c	onnec	tion	cable	6 m)						
01	2 contacts		Stan	dard	cont	act - arrangement see	page 129					
02	4 contacts		z.B.									
03	6 contacts		A98	0		MS00						
04	8 contacts		A05			MS21						
05	5 10 contacts					MS21-00						
06	12 contacts					MS24-0						
						A99 contact - arrangement according customer request						
Z	Spring return											
R	Friction brake											
Р	Potentiometer Ex		P14	4	T13	50 2 x 5 kOhm	l max. 1 mA					
			P14	5	T13	50 2 x 10 kOhm	l max. 1 mA					
					$\langle E_{\mathbf{x}} \rangle$ I	I 2G Ex d IIC T6 Gb						
					Con	nection cable 6 m						







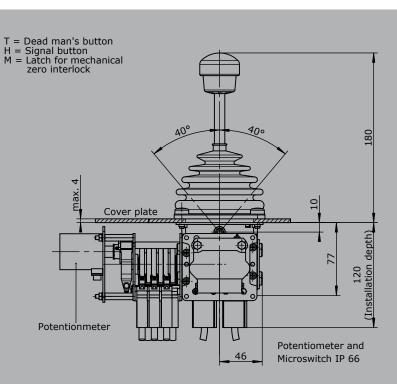

Knob solid D= Push button



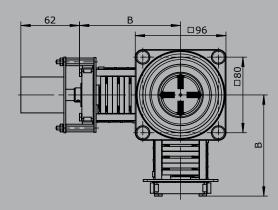



Туре	No. of contacts	Dim. B
01	2	82
02	4	94
03	6	107
04	8	119
05	10	132
06	12	144

Double-Handle Controller




The Double-Handle Controller D8 is a robust switching device for electro hydraulic and the hoisting applications. The modular design enables the switching device to be used universally.

Technical data

Mechanical life D8 8 million operating cycles

-40°C to +85°C Operation temperature Degree of protection Up to IP54 front




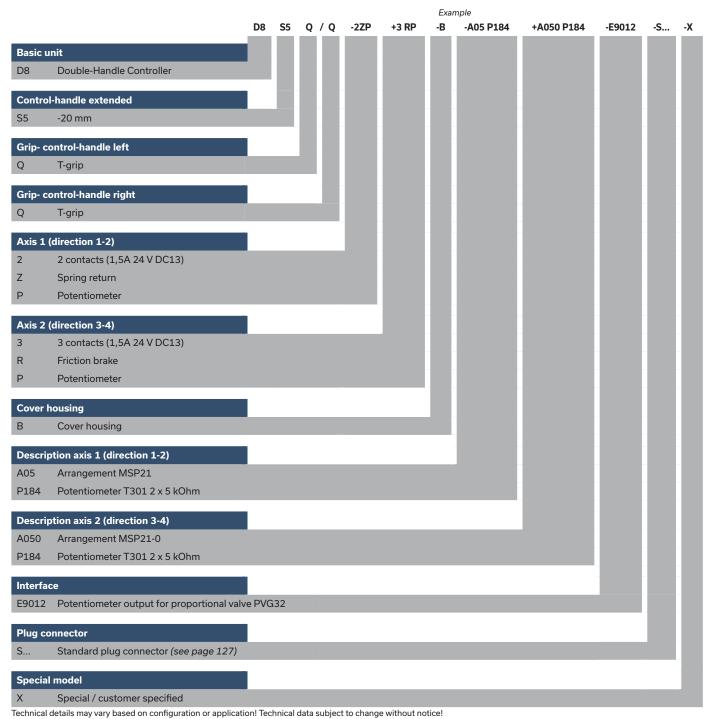

V2023/2 17.03.2025

Double-Handle Controller



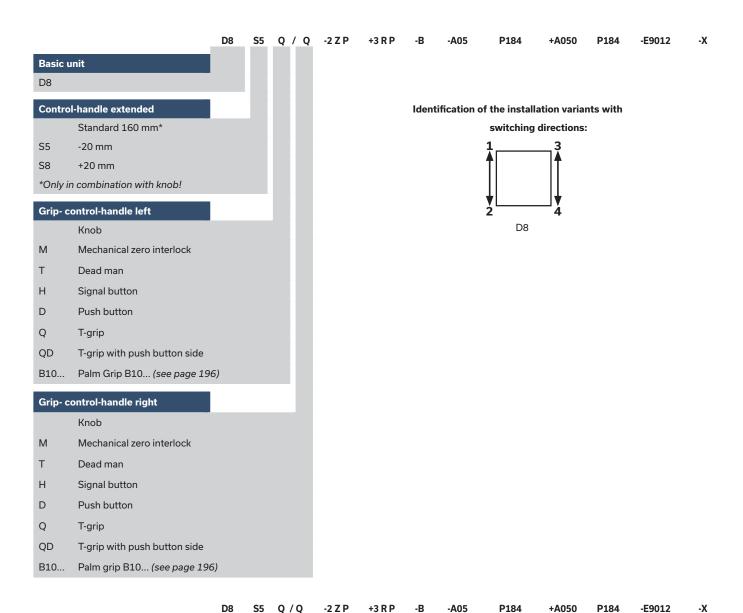


		D8	33	Q/Q	-2 Z P	+3 K P	-в	-AU5	P184	+AU5U	P184	-E9012	-
Axis 1	L: direction 1-2 left												
1	1 contact	Standa	rd cor	ntact - arra	angement	see page	129						
2	2 contacts	e.g.											
3	3 contacts	A98											
		A05											
		A050											
		A99 co	ntact	- arrangei	ment for c	ustomer re	equest						
Z	Spring return												
	Friction brake												
R													
(P)	Mounting options for pote	entiometer a	and en	icoder (G	essmann-	types)							
Р	Potentiometer	P181	T30	12 x 0,5	kOhm	l max. 1 i	mA						
		P182	T30	12 x 1 k0	Dhm	l max. 1 r	mA						
		P183	T30	1 2 x 2 k0	Dhm	l max. 1 i	mA						
		P184	T30	1 2 x 5 k0	Dhm	l max. 1 r	mA						
		P185	T30	12 x 10 k	Ohm	l max. 1 r	mA						
		More p	otenti	iometers (on reques	t!							
Н	Hall-potentiometer		E14	811		0,52,5.	4.5 V /	4,52,5	0.5 V				


Double-Handle Controller



Combination possibilities with our handles




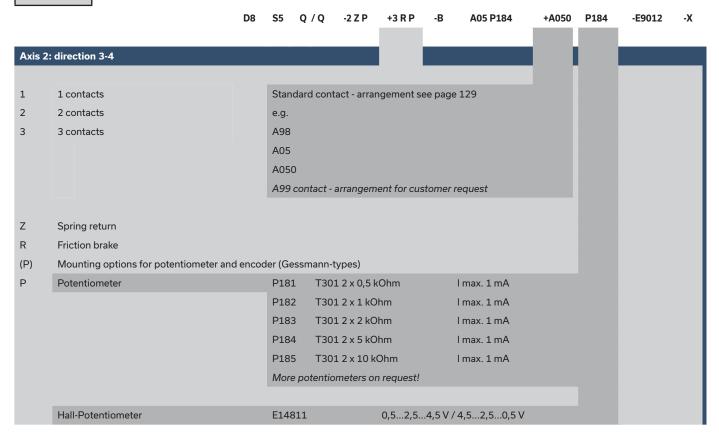

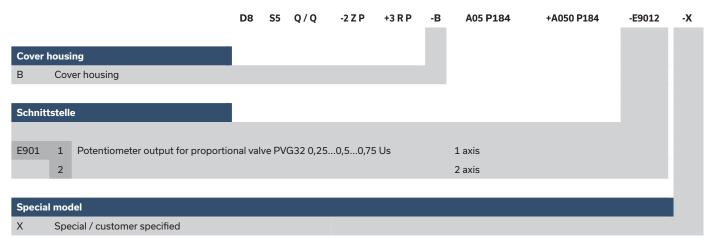

Double-Handle Controller D8



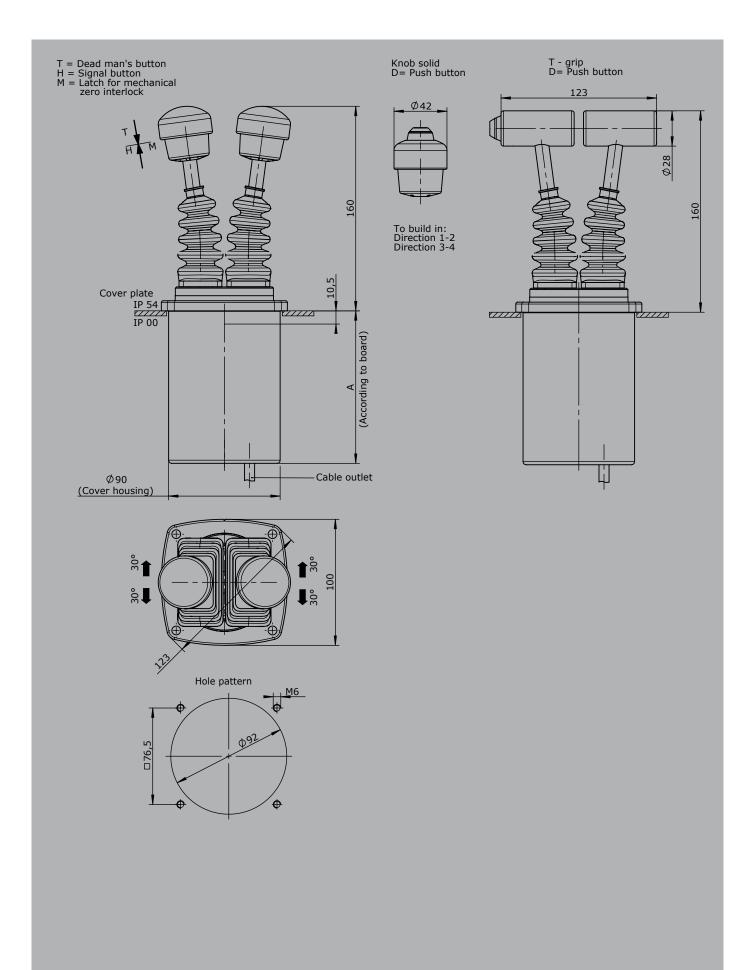





The Double-Handle Controller D64/DD64 is a robust controller used commonly in crane and hoisting applications. The modular design enables the switching device to be used universally.

Technical data

Mechanical life D6410 million operating cyclesMechanical life DD6420 million operating cycles

Operation temperature $-40^{\circ}\text{C to } +85^{\circ}\text{C}$ Degree of protection Up to IP54 front




Example -01 Z P -A05 P134 D64 S5 Q Q +03A R C +A110 C01 -X Basic unit D64 Double-Handle Controller Control-handle extended S5 -20 mm **Grip- control handle left** T-grip Grip- control handle right T-grip Axis 1 (direction 1-2) 01 2 contacts (2A 250 V AC15) Ζ Spring return Ρ Potentiometer Axis 2 (direction 3-4) 6 contacts (4A 250 V AC15) 03A R Friction brake С Opto-electronical encoder Description axis 1 (direction 1-2) A05 Arrangement MSP21 P134 Potentiometer T396 2 x 5 kOhm **Description axis 2 (direction 3-4)** Arrangement MSP 24-0 OEC 2-1-1 Special model Special / customer specified



Combination possibilities with our handles



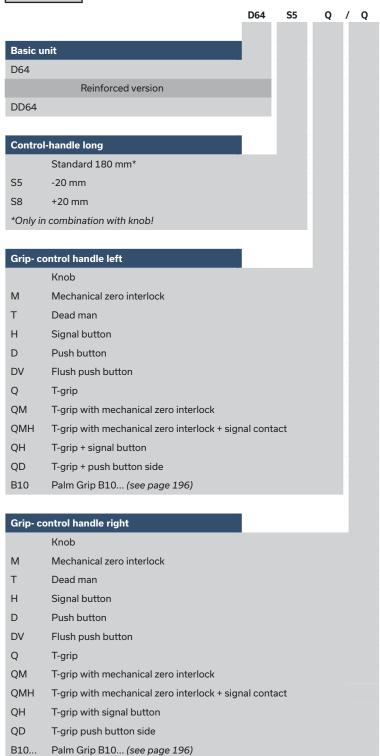

Identification of the installation variants with switching directions:

P134

+A110


C01

-X

-A05

-01 Z P

+03 A R C



D64 / DD64





			D64	S5	Q) /	Q	-01 Z P	+03 A R C	-A05	P134	+A110	C01	-X
Axis	1: di	rection 1-2												
		(Standard contacts gold-plated 2A 250 V A	C15)											
01		2 contacts	Standa	rd cont	acts -	see a	arrange	ement page	129					
02		4 contacts	e.g.											
03		6 contacts	A980		MSC	00								
04		8 contacts	A05		MS2	21								
05		10 contacts	A0500		MS2	21-00)							
06		12 contacts	A110		MS2	24-0								
	A = 9	Silver contact (4A 250 V AC15)	A99 co	ntact - a	arrang	geme	nt acc	ording custo	mer request					
Z	Sprii	ng return												
R	·	ion brake												
(P)	Mou	nting options for potentiometer and encoder	(Gessn	nann-typ	oes)									
Р	Pote	ntiometer		P131		Т3	96 2 x	0,5 kOhm	I max. 1 mA					
				P132		Т3	96 2 x	1 kOhm	I max. 1 mA					
				P133		Т3	96 2 x	2 kOhm	I max. 1 mA					
				P134		Т3	96 2 x	5 kOhm	I max. 1 mA					
				P135		Т3	96 2 x	10 kOhm	I max. 1 mA					
				More p	ooten	tiom	eters o	n request!						
С	Enco	oder		C En	code	rsee	page :	L37						
			D64	S5	Q	/	Q	-01 Z P	+03 A R C	-A05	P134	+A110	C01	-X

Axis	s 2: di	irection 3-4 (Standard contacts gold plated 2A 250 V AC15)		_	_
01		2 contacts	Standard cor	ntact - see arrangement	t on page 129
02		4 contacts	e.g.		
03		6 contacts	A980	MS00	
04		8 contacts	A05	MS21	
05		10 contacts	A0500	MS21-00	
06		12 contacts	A110	MS24-0	
	A =	Silver contacts (4A 250 V AC15)	A99 contact	- arrangement accordin	ng customer request
R (P) P	Mou	tion brake unting options for potentiometer and encoder (Gessi entiometer	P131 P132 P133 P134 P135	T396 2 x 0,5 kOhm T396 2 x 1 kOhm T396 2 x 2 kOhm T396 2 x 5 kOhm T396 2 x 10 kOhm	I max. 1 mA
С	Enc	oder	C Encoder	see page 137	
Spe	cial <u>m</u>	nodel			
Χ	Spe	ecial / customer specified			

Attachments		
Indicating labels		
Indicating labels engraved		



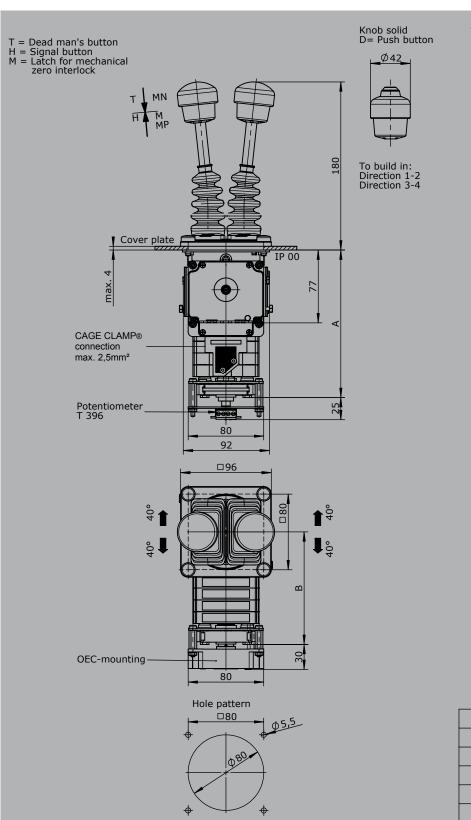

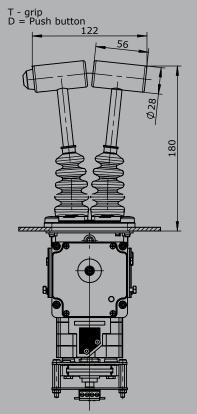

Туре	No. of contacts	Dim. A	Dim. B
01	2	119	82
02	4	131	94
03	6	144	107
04	8	156	119
05	10	169	132
06	12	181	144




The Multi-Axis Controller V11 is a robust switching device for crane and hoisting applications. The modular design enables the switching device to be used universally.

Technical data

Mechanical life V11 10 million operating cycles

Operation temperature $-40^{\circ}\text{C to } +85^{\circ}\text{C}$ Degree of protection Up to IP54 front



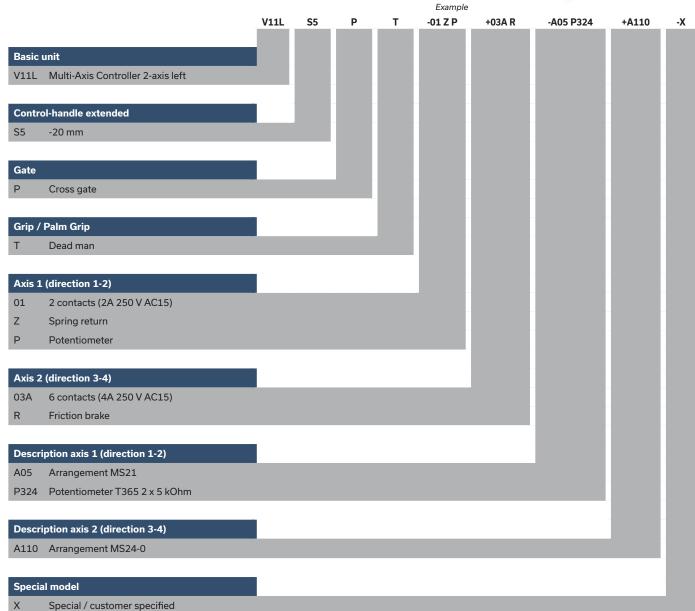



Combination possibilities with our grips



01 Z P

Т

V11L 2-axis left
V11R 2-axis right
V11.1L 1-axis left
V11.1R 1-axis right

V11L

S5

Control-handle extended

Standard 120 mm*

S5 -20 mm

S8 +20 mm

*Only available in combination with a handle!

Gate

Μ

P Cross gate
P X Special gate

Grip / Palm Grip

Knob (included in basic unit!)

Mechanical zero interlock

MN Mechanical zero interlock (push down)

T Dead man

H Signal button


D Push button

DV Flush push button

B... Palm Grip B... (see page Palm Grip 163)


Identification of the installation variants with switching directions:

A05 P324



V11.1

03A R P




A110 P325



			V11L	S5	Р	т	- 0	1 Z P	+	03A R P -	A05 P324	_ •	A110 P325	- X
Axis	1: di	irection 1-2 left / direction 5-6 righ	t											
		(Standard contacts gold-plated 2A		15)							-			
01		2 contacts		Standa	ard cor	ntact -	arrange	ement se	ee pa	age 129				
02		4 contacts		e.g.										
03		6 contacts		A980			MS00							
				A05			MS21							
				A0500)		MS21	-00						
				A110			MS24	-0						
				(Max.	4 steps	s per s	witchin	g directi	on p	ossible!)				
	A = :	Silver contacts (4A 250 V AC15)		A99 co	ontact	- arrar	ngemen	t accord	ling (customer reques	st			
Z	Spri	ing return												
R	Frict	tion brake												
(P)	Pos	sibility of mounting potentiometer ar	nd encod	er (Ges	smann	-types	s)							
Р	Pote	entiometer		P324		T365	5 2 x 5 k	Ohm		l max. 1 mA				
				P325		T365	2 x 10	kOhm		l max. 1 mA				
				More p	ootenti	iomete	ers on re	equest!						
С	Enc	oder		C En	coder	see pa	age 137							
														_
			V11L	S5	Р	Т	- ()1 Z P	+	03A R P -	A05 P324	+	A110 P325	- X
Axis	2: di	rection 3-4 left / direction 7-8 righ	t						(r	not applied for V	11.1)			
		(Standard contacts gold-plated 2A	250 V A	C15)										
01		2 contacts (2A 250V AC15)		Standa	ard cor	ntact -	arrange	ement se	ee pa	age 129				
02		4 contacts (2A 250V AC15)		z.B.										
03		6 contacts (2A 250V AC15)		A980			MS00							
				A05			MS21							
				A0500)		MS21	-00						
				A110			MS24							
										ossible!)				
	<u>A</u> =:	Silver contacts (4A 250 V AC15)		A99 co	ontact	- arrar	ngemen	t accord	ling (customer reques	st			
Z	Spri	ing return												
R		tion brake												
(P)		sibility of mounting potentiometer a	nd ancod	ar (Gas	emann	-tvnes	e)							
(, P		entiometer	ia cricoa	P324	Sinann		5 2 x 5 k(Ohm		l max. 1 mA				
•	100			P325			5 2 x 10			I max. 1 mA				
					ootenti		ers on re							
				,				,						
С	Enc	oder		C En	coder	see pa	age 137							
			V11L	S5	Р	т	- ()1 Z P	+	03A R P -	A05 P324	+	A110 P325	- X
Spe	cial m	nodel												
Χ	Spe	cial / customer specified												
Atta	chme	ents												
_	_	labels												
		labels with engraving												



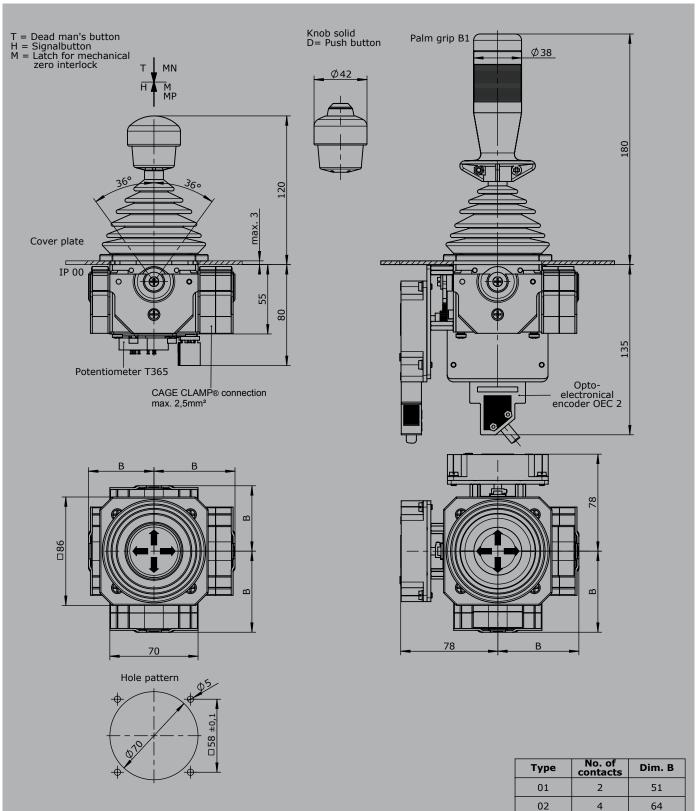

Туре	contacts	Dim. B
01	2	51
02	4	64
03	6	76





The V14 is a robust switching device for remote control and electro-hydraulic applications. Due to its modular design, this control unit can be used universally. The integrated sensor system has signal and potentiometer tracks in conductive plastic technology. Switching contacts are also available as an option.


Technical data

Mechanical life V14 6 million operating cycles

Operation temperature -40°C to +85°C

Degree of protection Up to IP65



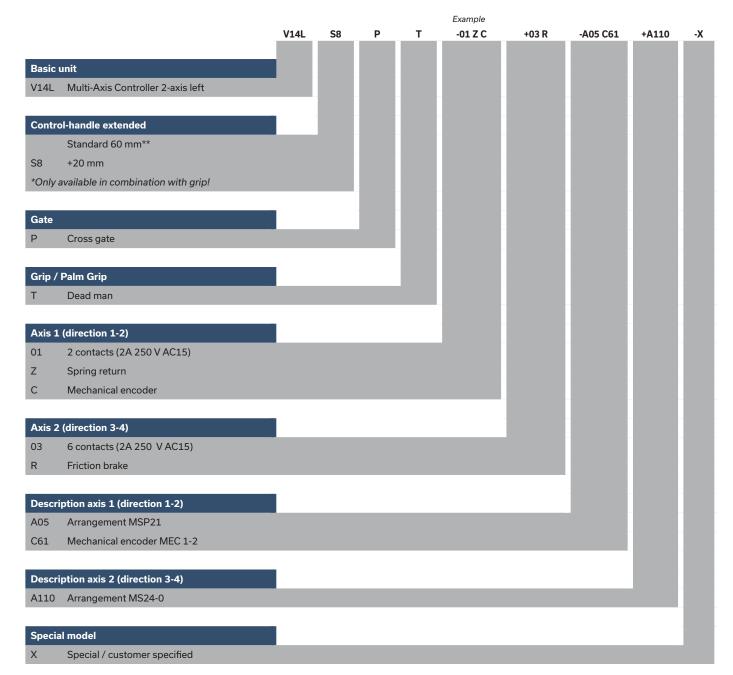







V14L S8 Р 01 Z C 03 R A05 C61 A110 Х

Basic unit

V14.1L	1-axis left
V14.1R	1-axis right
V14L	2-axis left
V14R	2-axis right

Control-handle extended

Standard 60 mm*

S8 +20 mm

*Only available in combination with a handle!


Gate


Р Cross gate РΧ Special gate

Grip / Palm Grip

Knob 25 mm (standard) Μ Mechanical zero interlock МН Mechanical zero interlock + signal contact Т Dead man Н Signal button GK1 Knob 42 mm GK1M Mechanical zero interlock Mechanical zero interlock (push down) GK1MN GK1T Dead man GK1H Signal button GK1MH Mechanical zero interlock + signal contact GK1D Push button GK1DV Flush push button GS9 Hall-twist grip with spring return GS9-D Hall-twist grip with spring return and push button on top В... Palm Grip B... (see page Palm Grip page 163)

Identification of the installation variants with switching directions:






V14.1L








V14.1R




*Attention! The Multi-Axis Controller V14 is not suitable for large Palm Grips (B3, B7/B8, B9...)

V14L S8 01 Z C 03 R A05 C61 A110 X Axis 1: direction 1-2 left / direction 5-6 right (Standard contacts gold-plated 2A 250V AC15) 01 2 contacts Standard contact - arrangement see page 129 02 4 contacts e.g. 03 6 contacts A05 MS21 A0500 MS21-00 A110 MS24-0 A99 contact - arrangement according customer request



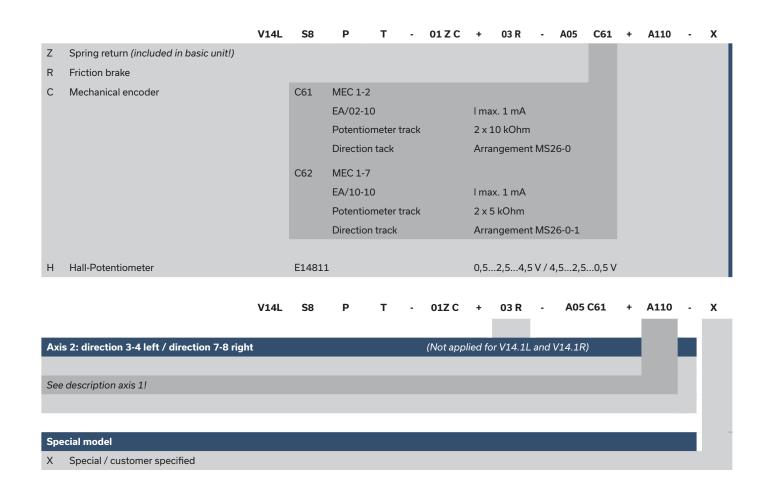



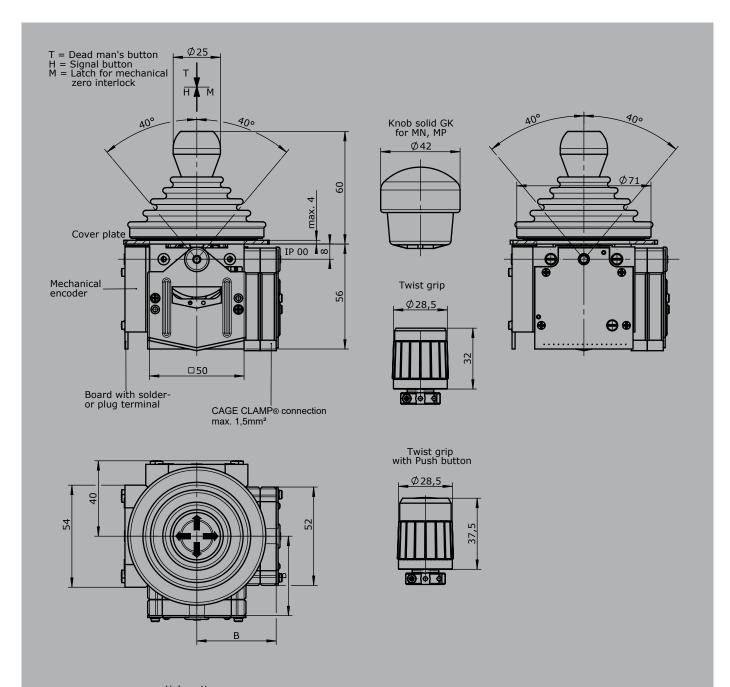

Hole pattern	
	Ø3,5
+	040
Ø51	

Туре	No. of contacts	Dim.
01	2	36
02	4	45
03	6	54





The S14 is a compact single-axis joystick designed for remote control and electrohydraulic applications. Due to its modular design, this control unit can be used universally. The integrated sensor system has signal and potentiometer tracks in conductive plastic technology. Optionally switch contacts are also available.

Technical data

Mechanical life S14 6 million operating cycles

Operating temperature -40°C to +85°C

Degree of protection Up to IP65



Example S14L S8 -01ZC -A05 C61 -X т Basic unit S14L Single-Axis Controller Control-handle extended Standard 60 mm* S8 +20 mm *Only possible in combination with handle! Grip / Palm Grip Dead man Axis 1 (direction 1-2) 01 2 contacts (2A 250 V AC15) Z Spring return С Mechanical encoder **Description axis 1 (direction 1-2)** A05 Arrangement MSP21 C61 Mechanical encoder MEC 1-2 Special model


Special / customer specified S14L S8 Т Basic unit S14L 1-axis left S14R 1-axis right Control-handle extended Standard 60 mm* +20 mm S8 *Only possible in combination with handle! Grip / Palm Grip Knob (standard) Mechanical zero interlock M МН Mechanical zero interlock + signal contact Т Dead man Н Signal button GK1 Knob 42 mm GK1M Mechanical zero interlock

Identification of the installation variants with switching directions:

-A05 C61

-X

-01ZC




Technical details may vary based on configuration or application! Technical data subject to change without notice!



		S14L	S8	т	-01ZC	-A05	C61	-X
GK1MN	Mechanical zero interlock (push down)							
GK1T	Dead man							
GK1H	Signal button							
GK1MH	Mechanical zero interlock + signal contact							
GK1D	Push button							
GK1DV	Flush push button							
GS9	Hall-twist grip with spring return							
GS9-D	Hall-twist grip with spring return and push button on top							
В	Palm Grip B (on request!)							
		S14L	S 8	т	-01ZC	-A05	C61	- X
							-	_
Axis 1: d	irection 1-2 left / direction 5-6 right		_					_
01	(Standard contacts gold-plated 2A 250V AC15) 2 contacts	Standard contact - arrangement see page 129						
02	4 contacts	z.B.	i contact - ai	rrangemen	it see page	: 129		
03	6 contacts	A05		MS21				
00	Connacts	A0500		MS21-00)			
		A110		MS24-0				
			tact - arrang		ording cus	tomer request		
Z	Spring return (included in basic unit!)					· ·		
R	Friction brake							
С	Mechanical encoder	C61	MEC 1-2					
			EA/02-10			l max. 1 mA		
			Potentiome	eter track		2 x 10 kOhm		
			Direction tr	ack		Arrangement MS	26-0	
		C62	MEC 1-7					
			EA/10-10			l max. 1 mA		
			Potentiome	eter track		2 x 5 kOhm		
			Direction tr	ack		Arrangement MS	26-0-1	
		More po	tentiometers	s on reque:	st!			
Н	Hall-Potentiometer	E14811				0,52,55,4 V /	4,52,50,5	V
		S14L	S 8	т	-01ZC	-A05	C61	-X
Special n								
X	Special / customer specified							



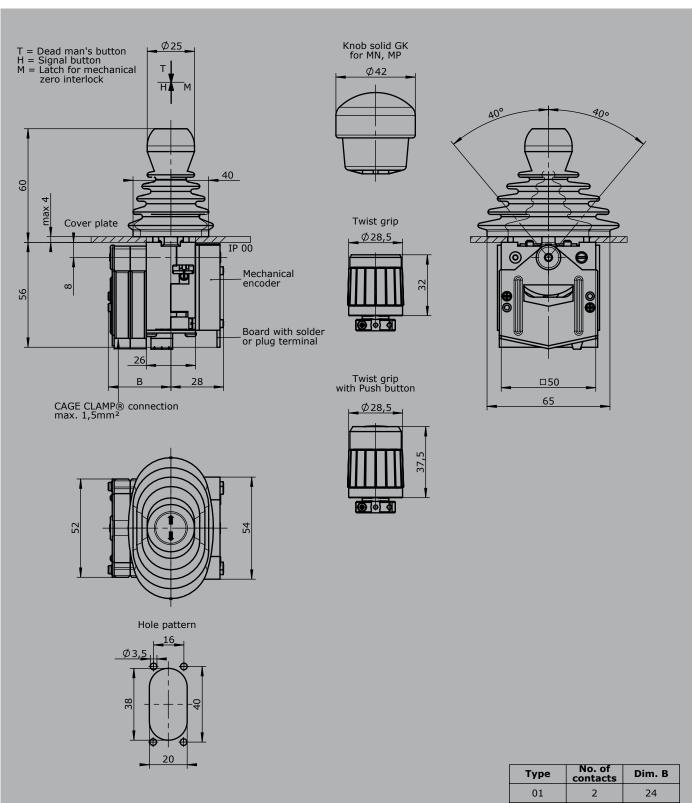

Туре	No. of contacts	Dim. B
01	2	24
02	4	33
03	6	42

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Single-Axis Controller S2/SS2/S21





The Single-Axis Controller S2 / SS2 / S21 is a robust switching device for remote controlled and electrohydraulic applications. The modular design of the switching device is universally applicable.

Technical data

S8

+20 mm

Mechanical life S2 / S21 6 million operating cycles Mechanical life SS2 10 million operating cycles

Operating temperature -40°C to +85°C Degree of protection Up to IP54



S2L - A050 P134 S5 Т - 02 Z P - X Basic unit S2L Single-Axis Controller left Control-handle extended S5 -20 mm Grip / Palm Grip Dead man Axis 1 (direction 1-2) 3 contacts (2A 250 V AC15) 02 Ζ Spring return Ρ Potentiometer **Description axis 1 (direction 1-2)** A050 Arrangement MSP21-0 P134 Potentiometer T396 2 x 5 kOhm Special model Special / customer specified

Example

S2L S5 - 02 Z P - A050 P134 Basic unit S2L Single-Axis Controller left S2R Single-Axis Controller right S21L Single-Axis Controller left with flange 96 x 96 mm S21R Single-Axis Controller right with flange 96 x 96 mm Identification of the installation variants Reinforced version with switching directions: SS2L Single-Axis Controller left left SS2R Single-Axis Controller right SS21L Single-Axis Controller left with flange 96 x 96 mm SS21R Single-Axis Controller right with flange 96 x 96 mm Control-handle extended Standard S5 -20 mm

- X

5-6

right

Single-Axis Controller S2 / SS2 / S21

Palm Grip B... (see page palm grip 163)

В...



- A050 P134

- X

Combination possibilities with our handles (valid for Single-Axis Controller S21)

S2L



S5

Т

- 02 Z P

- 02 Z P

Т

- A050 P134

- X

Grip /	Palm Grip
	Knob (standard)
М	Mechanical zero interlock
MN	Mechanical zero interlock (push down)
Т	Dead man
MT	Mechanical zero interlock + dead man
Н	Signal button
МН	Mechanical zero interlock + signal button
D	Push button
MD	Mechanical zero interlock + push button
DV	Flush push button
MDV	Mechanical zero interlock + flush push butt

S2L S5 Т - 02 Z P - A050 P134 - X Axis 1: direction 1-2 left / direction 5-6 right 02 3 contacts Standard contact - arrangement see page 129 03 5 contacts 04 7 contacts A98 MS0 05 A05 MS21 9 contacts A0500 MS21-00 A110 MS24-0 A99 contact - arrangement according customer request Ζ Spring return R Friction brake (P) Possibility of mounting potentiometer and encoder (Gessmann-types) Ρ Potentiometer T396 2 x 0,5 kOhm I max. 1 mA P132 T396 2 x 1 kOhm I max. 1 mA P133 T396 2 x 2 kOhm I max. 1 mA P134 T396 2 x 5 kOhm I max. 1 mA P135 T396 2 x 10 kOhm I max. 1 mA More potentiometers on request! С Encoder C... Encoder see page 137

S5

Special / customer specified

Х1 Microswitch (MZT 1) positively driven NC contact

Attachments


Indicating labels

Indicating labels with engraving

S2L


Single-Axis Controller S2 / SS2



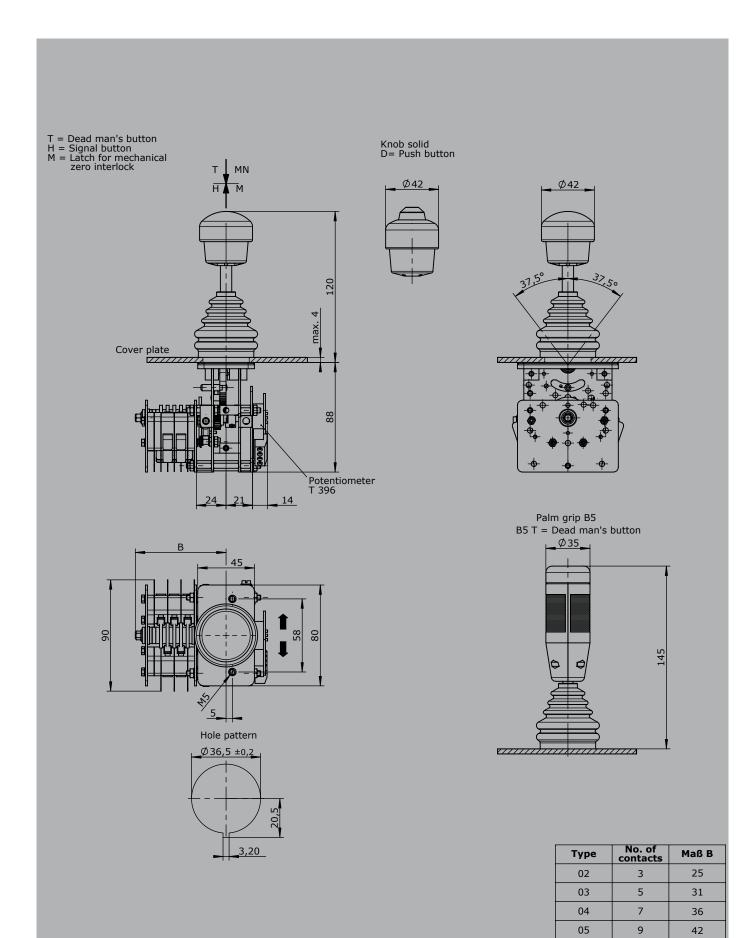

- 1	
- 1	echnical details may vary based on configuration or application! Technical data subject to change without notice!
	echnical details may vary based on configuration of application: rechilical data subject to change without notice:



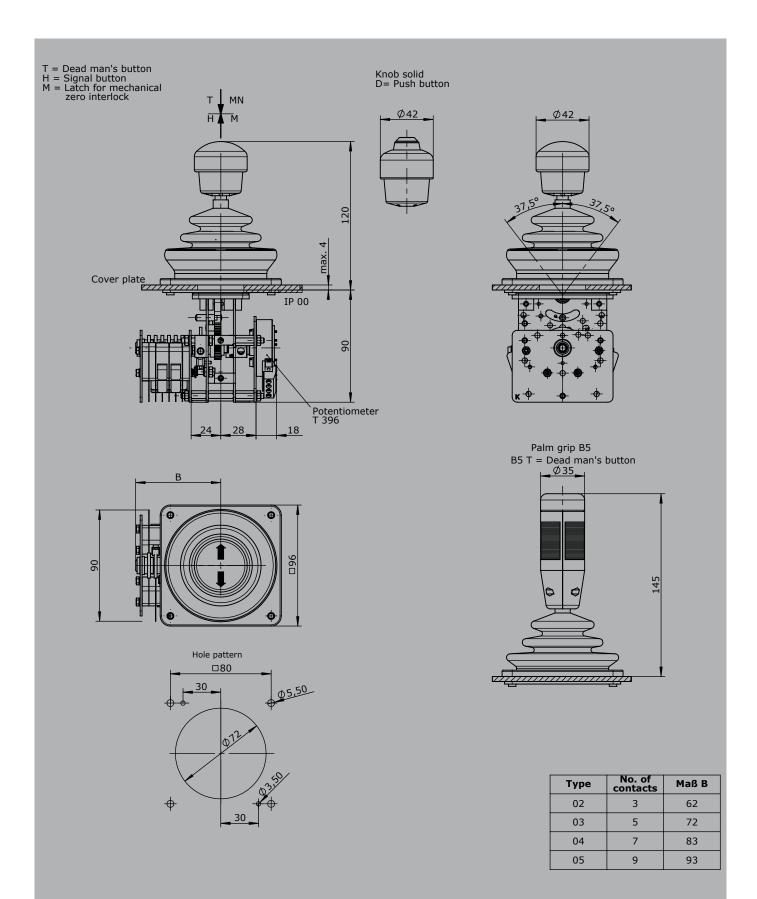

L	2
(
(
C	1
¢	٧
(Ċ
1	-
4	
(`
٦	`
(7
(1
(
Ċ	
	`

Single-Axis Controller S22 / SS22





The Single-Axis Controller S22 / SS22 is a robust switching device for remote controlled and electrohydraulic applications. The modular design of the switching device is universally applicable.

Technical data

Mechanical life S22 6 million operating cycles

Mechanical life SS22 10 million operating cycles

Operating temperature -40°C to +85°C

Degree of protection Up to IP54



Example S22L - 3 Z P - A050 P134 S5 Т - X Basic unit S22L Single-Axis Controller left Control-handle extended -20 mm Grip / Palm Grip Dead man Axis 1 (direction 1-2) 3 contacts (2A 250 V AC15) 3 Z Spring return Ρ Potentiometer Description axis 1 (direction 1-2) A050 Arrangement MSP21-0 P134 Potentiometer T396 2 x 5 kOhm Special model Special / customer specified


S22L Т - 3 Z P **S5** - A050 P134 Basic unit S22L Single-Axis Controller left Identification of the installation variants S22R Single-Axis Controller right with switching directions: Reinforced version S22L/SS22L S22R / SS22R SS22L Single-Axis Controller left SS22R Single-Axis Controller right Control-handle extended Standard S5 -20 mm S8 +20 mm

Technical details may vary based on configuration or application! Technical data subject to change without notice!

- X


5-6



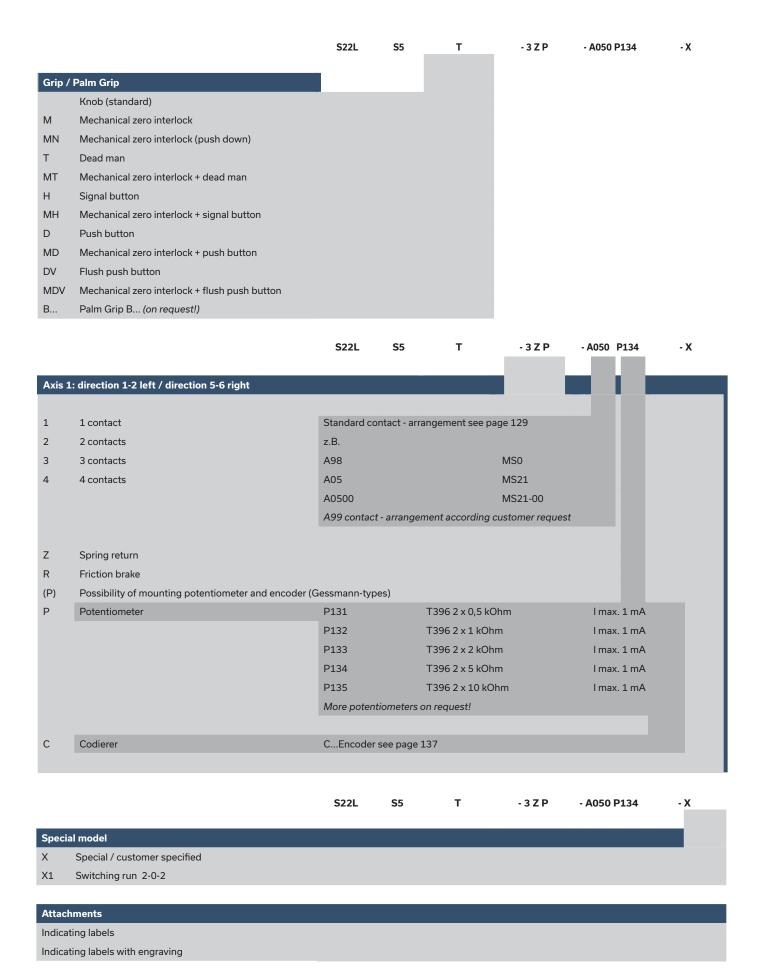

Single-Axis Controller S22 / SS22



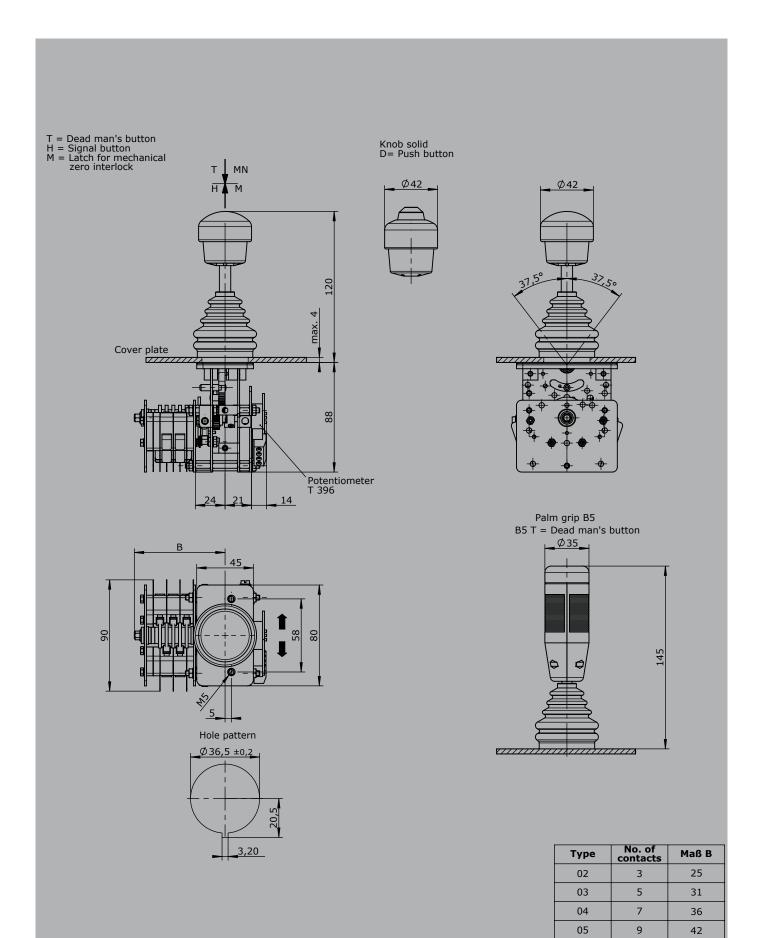

Technical details may	vary based	on configuration	or application!	Tochnical data cubi	iget to change with	out potical
recrimical details may	vary baseu	on configuration (or application:	recillical data subj	lect to change with	Jul Holice:

Multi-Axis Controller V23



The V23 is a switching device for remote control applications. The integrated sensor system has signal and potentiometer tracks in conductive plastic technology. Detent points are optionally selectable. Due to its small dimensions it can be optimally integrated into small remote control housings.

Technical data

Mechanical life V23 3 million operating cycles

Operation temperature -40°C to +85°C

Degree of protection IP67 front




Example V23A .P -C80 +C80 -X Basic unit V23.1A Multi-Axis Controller 1-axis with spring return, installation from below V23A Multi-Axis Controller 2-axis with spring return, installation from below V23.1B Multi-Axis Controller 1-axis with spring return, installation from top V23B Multi-Axis Controller 2-axis with spring return, installation from top Gate Р Cross gate PXSpecial gate Axis 1: direction 1-2 C80 Mechanical encoder MEC 3-1 EA/26-10 I max. 1 mA Potentiometer resistance 2x5 kOhm Contact arrangement Arrangement MS24 With 12-pol. JST-connector Axis 2: direction 3-4 (not applied for V23.1) See description axis 1! Special model

Attachments	
Mating connector JST 12-polig (included in delivery!)	5300000263
Mating connector JST 12-pole with single wire 500 mm long	5300000264


Special / customer specified


Multi-Axis Controller V23



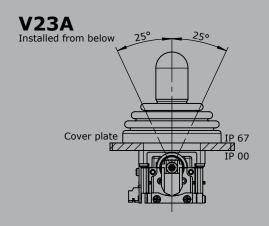


Hole pattern (installed from below)











Hole pattern (installed from the top)







Multi-Axis Controller



The V20 is a rugged switching device for remote control. The integrated sensor technology has signal and potentiometer tracks in conductive plastic technology. Detent points can be integrated as an option.

Technical data

Mechanical life V20 3 million operating cycles

Operation temperature -40°C to +85°C

Degree of protection IP65 (optional IP67)



						the state	The state of the s	
				Example		-	#0 # 0	
		V20	-Р	D	-C71	+C71	-В	-X
Basic un	it							
V20.1	Multi-Axis Controller 1-axis with spring return							
V20	Multi-Axis Controller 2-axis with spring return							
V20.1A	Multi-Axis Controller 1-axis with spring return, IP67 f	ront						
V20A	Multi-Axis Controller 2-axis with spring return, IP67 f	ront						
Gate								
р	Cross gate							
PX	Special gate							
Grip								
	Knob (standard)							
D	Push button							
GS9	Hall-twist grip with spring return							
GS9-D	Hall-twist grip with spring return and push button on	top						
Axis 1: d	lirection 1-2							
C70	Mechanical encoder							
	MEC 2-1							
	EA/15-10	I max. 1 mA	4					
	Potentiometer track	2 x 5 kOhm	1					
	Direction track	Arrangeme	ent MS224-0					
C71	Mechanical encoder							
	MEC 2-2							
	EA/11-10	I max. 1 mA	4					
	Potentiometer track	2 x 5 kOhm	1					
	Direction track	Arrangeme	nt MS24-0					
C72	Mechanical encoder							
	MEC 2-5							
	EA/21-10	I max. 1 mA	4					
	Potentiometer track	2 x 5 kOhm	1					
	Direction track	Arrangeme	nt MS25-0					

Axis 2: direction 3-4

See description axis 1!

Cover housing

B Cover housing KBQ 905 (IP65)


Special model

X Special / customer specified

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Multi-Axis Controller



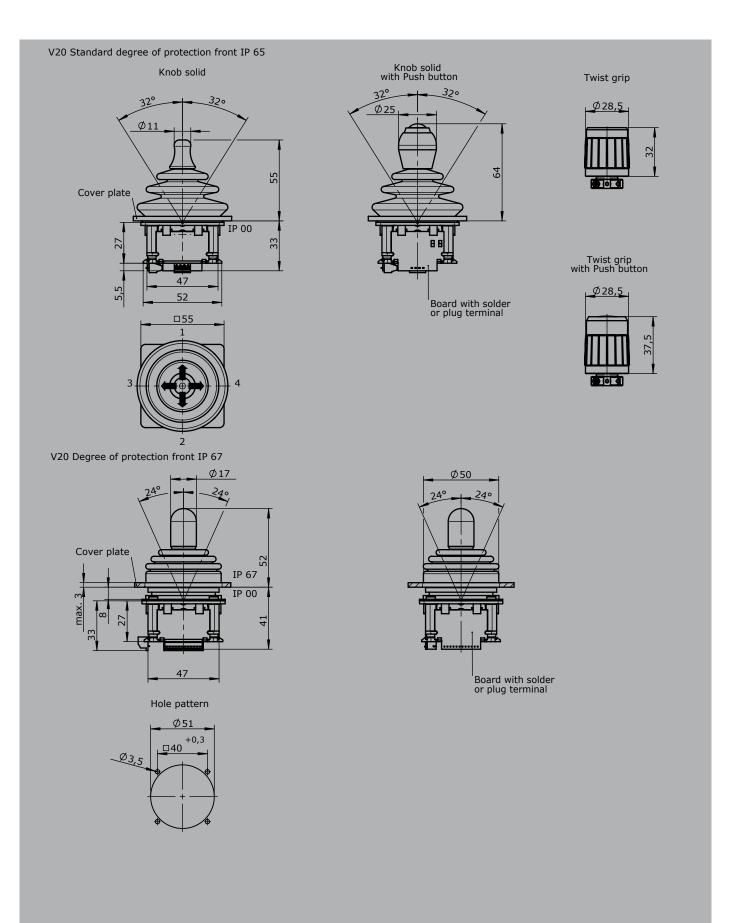





The S1 is a one-axis joystick for remote control and eletro-hydraulic applications. The modular design of the switching device is universally applicable.

Technical data


Mechanical life S1 6 million operating cycles

Operating temperature -40°C to +85°C
Degree of protection up to IP65




Example S1 Т - 2 Z P - A05 P374 - X **Basic unit** Single-Axis Controller 1-axis Grip / Palm Grip Dead man Axis 1 (direction 1-2) 2 2 contacts (1,5A 24 V DC13) Ζ Spring return Ρ Potentiometer Description axis 1 (direction 1-2) Arrangement MSP21 A05 P374 Potentiometer T 375 2 x 5 kOhm Special model Special / customer specified



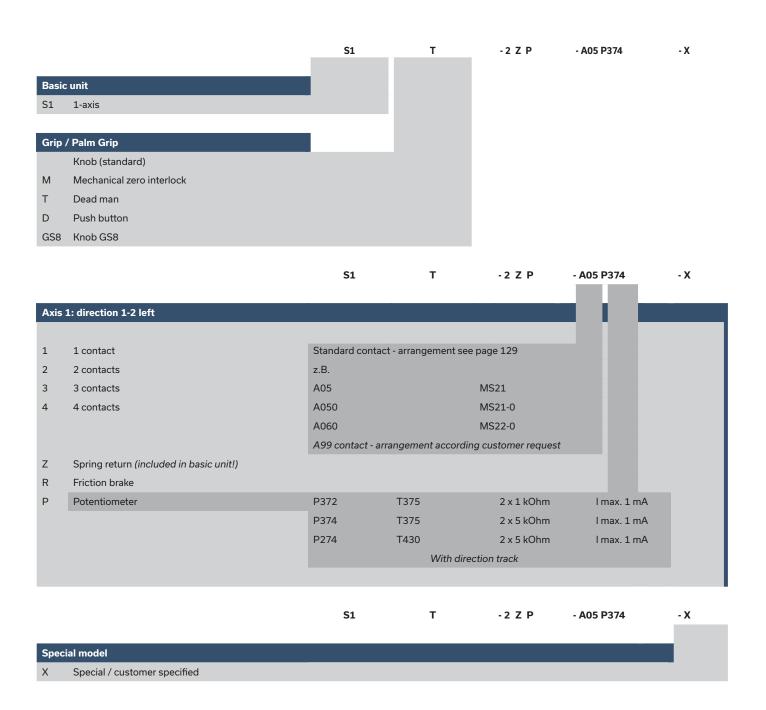



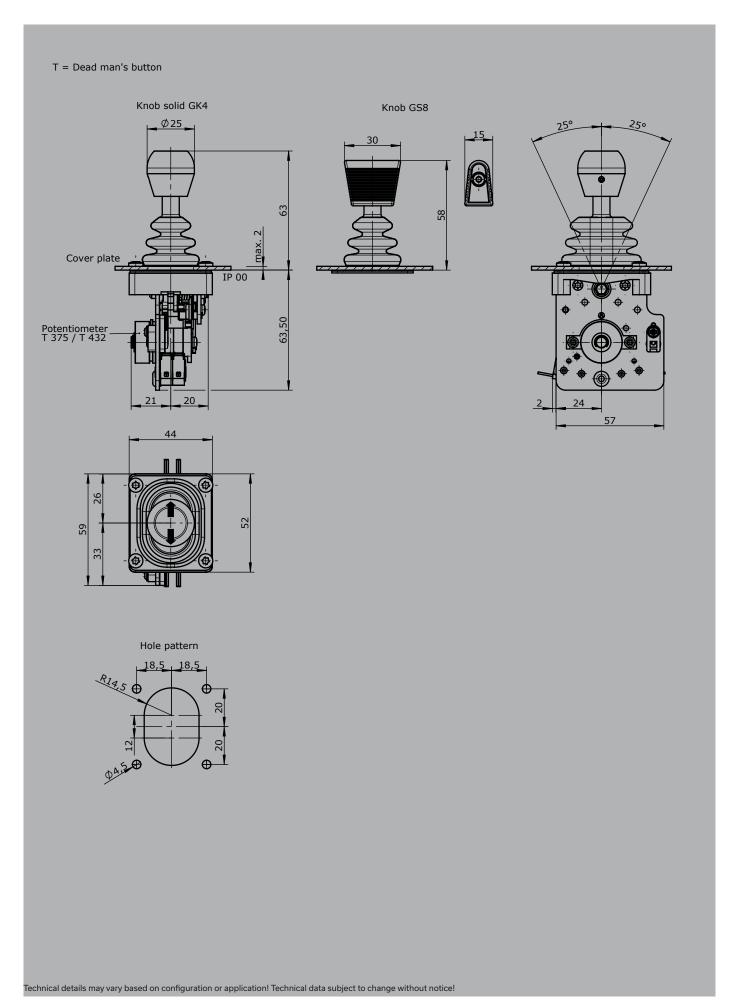

Lever Switch



The S51 lever switch series, specially developed for the rail sector, offers a high degree of robustness as well as a long service life. Typically, this high-quality product is found in driver's cab consoles of rail traction units.

All current standards (EN 50155, UIC 612, EN 45545 ...) were observed in the course of development.

Technical data

Total: ± 34° (-34° / -17° / 0° / +17° / +34°) Deflection angle

Mechanical life 5 million operating cycles

Ambient temperature range -40°C til +70°C (OT3 acc. to EN50155)

IP54 (above the mounting plate) Degree of protection

IP20 (below the mounting plate)

24 VDC, 72 VDC, 110 VDC

Supply voltages with fluctuations acc. to EN 50155

UIC 612

Reference to relevant standards

EN 45545 part 2 Fire protection

Driver-machine interfaces for

EMU/DMU, locomotives and control cars

EN 60529 Protection by housing

Railroad applications - Electronic

2

3

4

5

6

2 contacts

3 contacts

4 contacts

5 contacts

6 contacts

Positively driven NC silver contacts (standard)

Positively driven NC gold contacts

EN 50155 equipment on railroad vehicles

Vibration and shock tests EN 61373

Climatic tests EN 60068



S51 - 2 - 1 - 4G **Basic unit** S 51 Lever switch S51 Lever switch S51 with rotation prevention Montagering 1 Nature eloxed 2 Black eloxed 3 Stainless steel (Siemens Sirius Act Design) Grip shape Grip shape B 1 2 Grip shape W 3 Grip shape K 4 Grip shape K05 5 Grip shape M 6 Grip shape Z 7 Grip shape K yellow Contacts 1 1 contact



Lever Switch S51



S51 -1 -2 -4G -MS20 -A23 -A24 -A25 -A26 -X

Detent


MS..

Detent	Switching direction 1 (SR1)		Centre	Centre Switching dire (SR2)	
Detent	2 34°	1 17°	0 0°	1 -17°	2 -34°
MS01	Notched				Notched
MS02	Blocked	Blocked			Notched
MS03	Notched			Blocked	Blocked
MS04	Notched	Notched		Notched	Notched
MS05	Blocked	Blocked		Notched	Notched
MS06	Notched	Notched		Blocked	Blocked
MS07	Spring return				Spring return
MS08	Blocked	Blocked			Spring return
MS09	Spring return		ion	Blocked	Blocked
MS10	Blocked	Blocked	oosit	Spring return	Spring return
MS11	Spring return	Spring return	Center position	Blocked	Blocked
MS12	Notched		Cer		Spring return
MS13	Spring return				Notched
MS14	Notched	Spring return		Spring return	Notched
MS15	Blocked	Blocked		Spring return	Notched
MS16	Notched	Spring return		Blocked	Blocked
MS17	Blocked	Notched		Notched	Notched
MS18	Notched	Spring return		Spring return	Blocked
MS19	Blocked	Spring return		Spring return	Notched
MS20	Spring return	Spring return		Spring return	Spring return
MS21	Blocked	Notched	without	Notched	Blocked
MS22	Notched			Spring return	Notched

Dataset	Switching direction 1 (SR1)				g direction 2 SR2)	
Detent	2 34°	1 17°	0 0°	1 -17°	2 -34°	
MS23	Notched		without		Notched	
MS24	Blocked	Spring return		Spring return	Blocked	
MS25	Notched	Notched		Spring return	Notched	
MS26	Spring return	Spring return		Spring return	Notched	
MS27	Notched	Spring return			Spring return	
MS28	Spring return	Notched		Notched	Notched	
MS29	Spring return			Spring return	Notched	
MS30	Notched	Spring return		Spring return	Spring return	
MS31	Blocked	Spring return		Notched	Notched	
MS32	Notched			Notched	Notched	
MS33	Blocked	Notched	Center position	Notched	Blocked	
MS34	Notched	Spring return*	r po		Spring return	
MS35	Notched	Notched	ente	Notched	Spring return	
MS36	Notched	Notched	O	Notched	Blocked	
MS37	Blocked	Notched		Spring return	Spring return	
MS38	Blocked	Notched		Notched	Spring return	
MS39	Notched	Spring return		Notched	Notched	
MS40	Notched	Notched			Spring return	
MS41	Blocked	Spring return		Spring return	Spring return	
MS42	Spring return	Spring return			Spring return	
MS43	Spring return	Notched		Notched	Spring return	
MS44	Spring return			Notched	Notched	

*harder transition

Switching function:

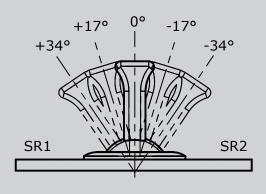

Lever Switch S51




S51 -1 -2 -4G -MS20 -A23 -A24 -A25 -A26 -X

Contacts programming

ŀ	٩		

mer	Control-handle position					
Programmnummer	Switching direction 1 (SR1)		Centre	Switching direction (SR2)		
Prograi	2 -34°	1 -17°	0°	1 17°	2 34°	
A01				X	X	
A02			Χ			
A03	7				Χ	
A04	locked			Χ		
A05			X		Χ	
A06			X	X		
A07	X	X				
A08			Χ			
A09	Χ			0	אַ ה	
A10		Χ		-	2	
A11	Χ		Χ			
A12		X	×			
A13	X	X		X	X	
A14			Χ			
A15			X	Х	X	
A16	X	Х	×			
A17				X	X	
A18	X	X				
A19	Χ				Χ	
A20		Χ		Χ		
A21	Χ		Χ		Χ	
A22		X	X	X		


Programmnummer	Control-handle position						
	Switching direction 1 (SR1)		Centre	Switching direction (SR2)			
Prograi	2 -34°	1 -17°	0 0°	1 17°	2 34°		
A23					Χ		
A24	Χ						
A25				Χ			
A26		Χ					
A27			X		Χ		
A28	Χ		Χ				
A29			X	×			
A30		X	X				
A31		Χ			Χ		
A32	Χ			Χ			
A33		Χ		X	X		
A34	X	X		Χ			
A35		X	X		Χ		
A36	Χ		X	X			
A37		X	X	X	X		
A38	X	Х	X	X			
A39	Χ			X	X		
A40	X	X			Χ		
A41	Χ		X	X	X		
A42	X	Х	X		Χ		
A43	Χ	Χ		Χ	Χ		

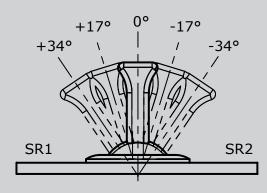

X	=	Contact closed
XX	=	Contact continuously closed
XX	=	Contact not continuously closed

Lever Switch S51



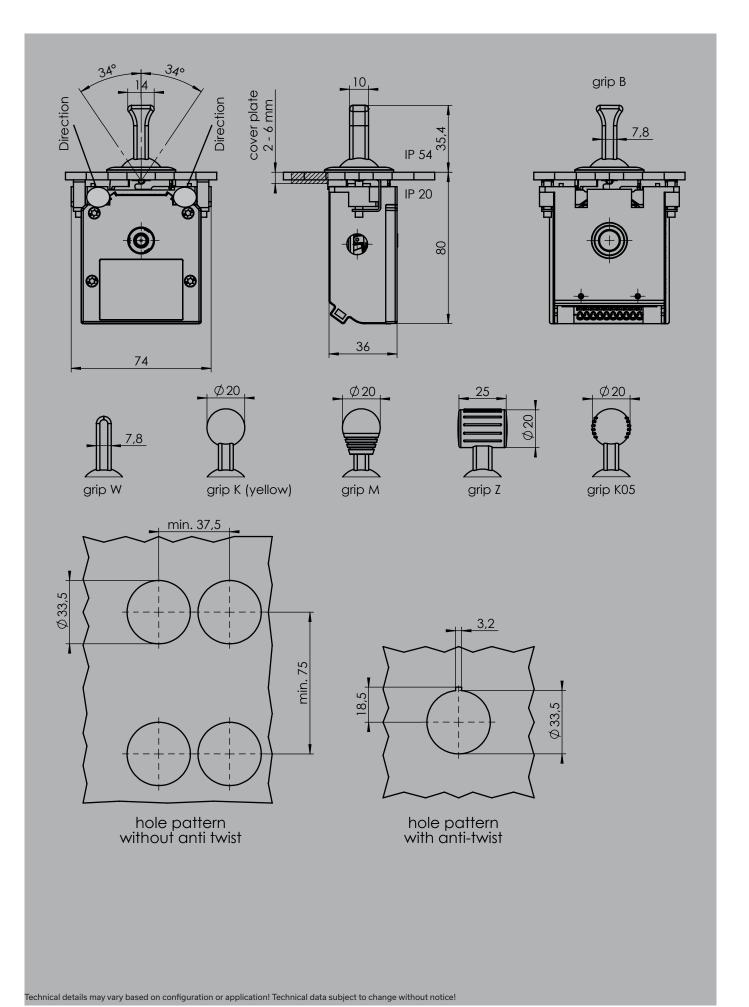







The Control-Switch N6 is a rugged switching device for hoisting applications. The modular design enables the switching device to be used universally. The N6 is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data

Mechanical life N6 10 million operating cycles

Operating temperature -40°C to +85°C


Degree of protection Up to IP54



				Example	
	_	N6	-DG	-01 Z P	-A05 P134
Basic	unit				
N6	Control-Switch incl. ISO-front plate 88 x 88 mm	1			
Grip					
DG	Twist grip				
Axis 1	(direction 2-4)				
01	2 contacts (2A 250 V AC15)				
Z	Spring return				
Р	Potentiometer				
Descri	iption axis 1 (direction 3-4)				
A05	Arrangement MSP21				
P134	Potentiometer T396 2 x 5 kOhm				
Specia	al model				
Χ	Special / customer specified				


Control-Switch



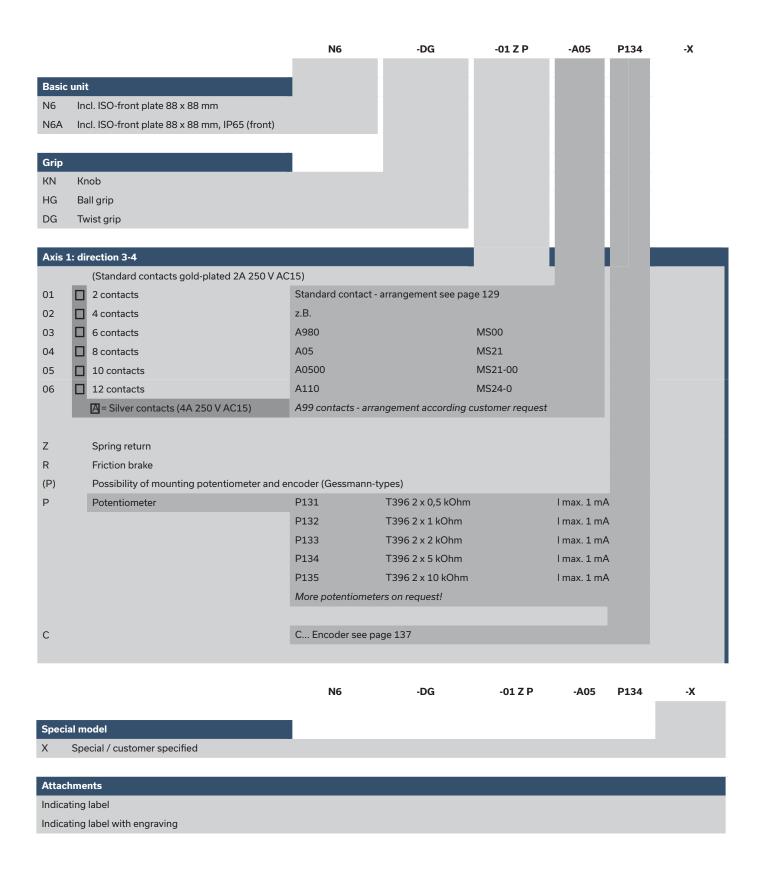

Control-Switch N6



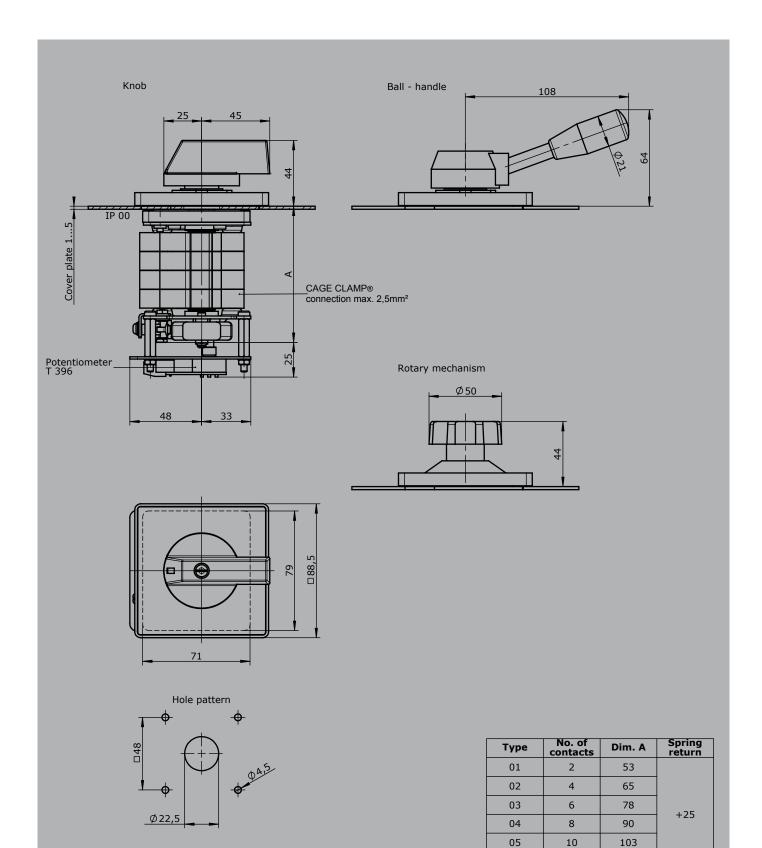

Tochnical details mayne	ary based on configuration	on or application! Technical of	data subject to change without notice!
recrimical details may ve	ary based on configuration	JII OI APPIICATION: TECHNICALC	iala Subject to change without notice:

Control-Switch N9





The Control-Switch N9 is a rugged switching device for electrohydraulic and hoisting applications. The modular design enables the switching device to be used universally.

Technical data

Mechanical life N9 10 million operating cycles

Operating temperature -40°C to +85°C


Degree of protection IP54





		N9	Example -2 R P	-A05	P134	-)
		N9	-2 R P	-AU5	P134	-
Basi	c unit	_				
N9	Control switch with twist grip	_				
Axis	1: direction 3-4					
1	1 contact	Standard c	ontact - arrangement see pag	e 129		
2	2 contacts	z.B.				
		A98	MS0			
		A05	MS21			
		A99 contac	ts - arrangement according c	ustomer request		
R (P)	Friction brake (included in basic unit) Possibility of mounting potentiometer and en	ncoder (Gessmann-type	s)			
Р	Potentiometer	P131	T396 2 x 0,5 kOhm	l max. 1 mA		
		P132	T396 2 x 1 kOhm	l max. 1 mA		
		P133	T396 2 x 2 kOhm	I max. 1 mA		
		P134	T396 2 x 5 kOhm	I max. 1 mA		
		P135	T396 2 x 10 kOhm	l max. 1 mA		
		More poter	tiometers on request!			
Н	Hall-Potentiometer	E14811	0,52,54,5 V / 4,52,	50,5 V		
Spec	cial model					
Χ	Special / customer specified					

Control-Switch N9




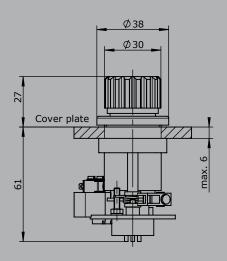





Hole pattern



Steering Column Switch



The Steering Column Switch V23 is designed for mounting on a steering column.

Technical data


Mechanical life V23S

1 million operating cycles

Operation temperature


-40°C to +85°C



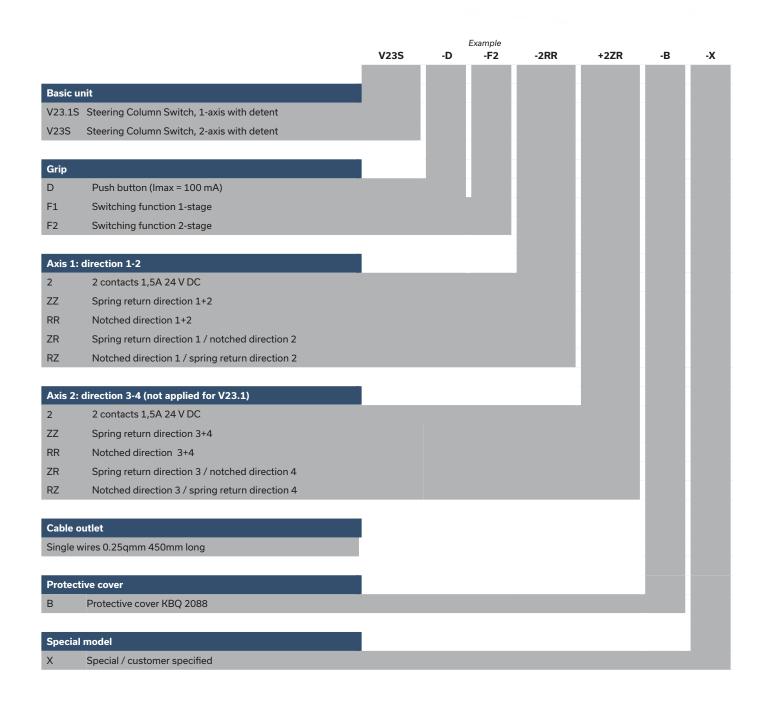

Steering Column Switch V23S



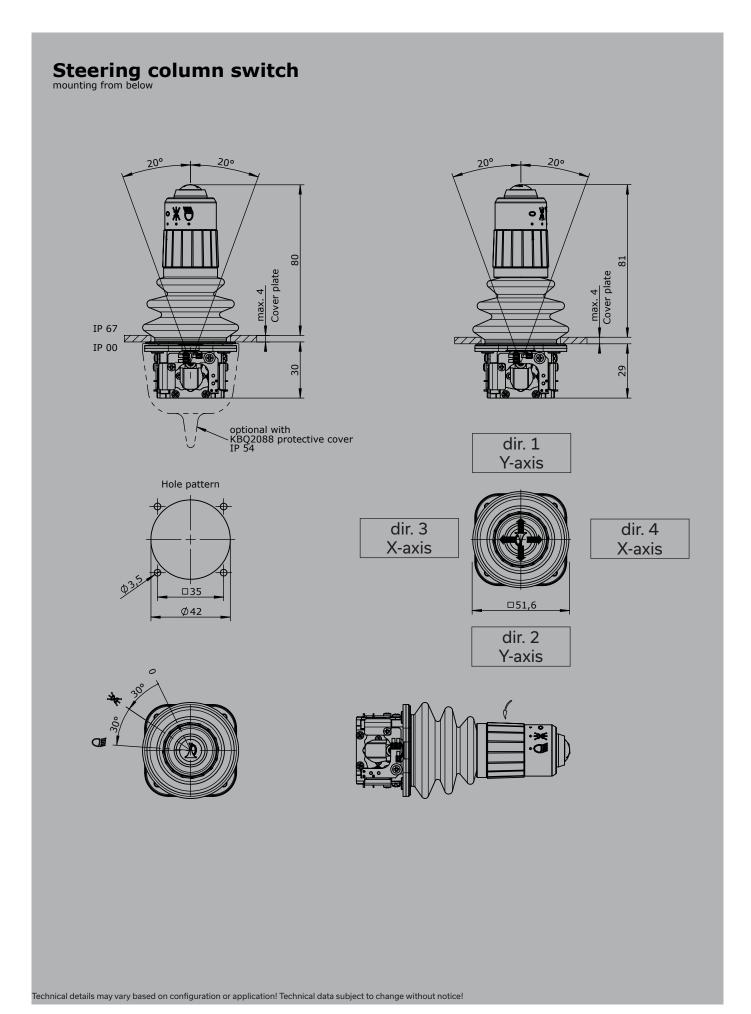

Standard Plug Connector



	Mole	x Micro-Fit 3.0 - Suited for cond	luctor cro	ss-section 0,1 til 0,75 mm²	
S004	Male housing 10-pole		S012	Female housing 10-pole	
S006	Male housing 14-pole		S014	Female housing 14-pole	20060667777
S007	Male housing 18-pole		S015	Female housing 18-pole	
	De	eutsch DTM - Suited for conduc	tor cross-	section 0,25 til 1,5 mm²	
S017	Male housing 4-pole		S022	Female housing 4-pole	
S018	Male housing 6-pole		S023	Female housing 6-pole	
S019	Male housing 8-pole		S024	Female housing 8-pole	
S021	Male housing 12-pole		S026	Female housing 12-pole	
	D	eutsch DT - Suited for conduct	or cross-s	ection 0,25 til 2,0 mm ²	
S027	Male housing 4-pole		S032	Female housing 4-pole	
S028	Male housing 6-pole		S033	Female housing 6-pole	
S029	Male housing 8-pole		S034	Female housing 8-pole	PART STATE
S031	Male housing 12-pole		S036	Female housing 12-pole	
		AMP CPC - Suited for conducto	r cross-se	ction 0,12 til 1,5 mm ²	
S037	Male housing CPC 13 9-pole		S040	Female housing CPC 13 9-pole	A COMPANY
S038	Male housing CPC 17 14-pole		S041	Female housing CPC 17 14-pole	
S039	Male housing CPC 23 37-pole		S042	Female housing CPC 23 37-pole	
	AMP Mini-Univer	rsal MATE-N-LOK (sealed) - Sui	ted for co	nductor cross-section 0,12 til 1,5 n	nm²
S043 [Cap housing 4-pole		S048 [plug housing 4-pole	
S044 [Cap housing 6-pole	20	S049 [plug housing 6-pole	THE STATE OF THE S
S045 [Cap housing 8-pole	BARRA	S050 [plug housing 8-pole	Salalalalalalalalalalalalalalalalalalal
S046 [Cap housing 10-pole		S051 [plug housing 10-pole	
	P pin	S socket			
		Phoenix - Suited for conduct	tor cross-s	section til 1,5 mm²	
S053	Male housing IC 2,5 (STGF) 8-pole with screw terminal		S057	Female housing MSTB 2,5 (STF) 8-pole with screw terminal	
S054	Male housing IC 2,5 (STGF) 12-pole with screw terminal		S058	Female housing MSTB 2,5 (STF) 12-pole with screw terminal	0000000
S055	Male housing IC 2,5 (STGF) 14-pole with screw terminal	a the second of the second	S059	Female housing MSTB 2,5 (STF) 14-pole with screw terminal	CHEMINA
S056	Male housing IC 2,5 (STGF) 18-pole with screw terminal		S060	Female housing MSTB 2,5 (STF) 18-pole with screw terminal	

Schematic description of the protection class






Degree of protection

B10 Joystick-main circuit board grouted (IP67)

B11 Joystick-main circuit board grouted (IP67) and grip function sealed, grip with drain hole

Standard Contact-Arrangement for master switch

GESSMANN

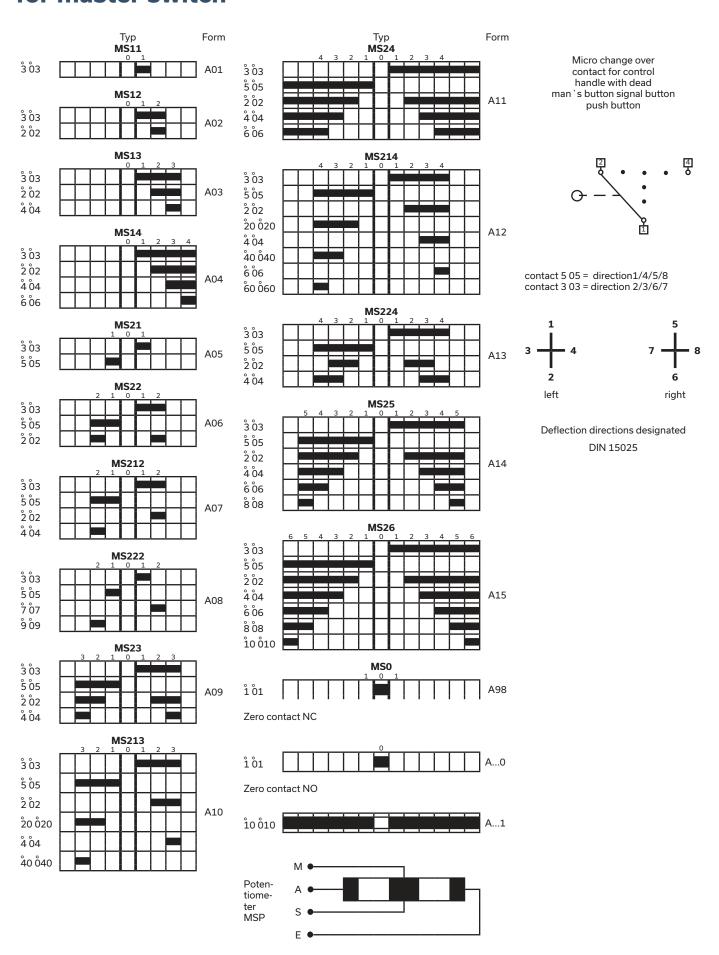

Technical data



Utilization categories for control switches to IEC/EN 60947-5-1

Type of current	Utilization category	Typical examples of application	Norm	Normal conditions of use					
		I= current made, Ic= current broken Ie= rated operational current, U= voltage before make Ue= rated operational voltage Ur= recovery voltage T 0,95= time in ms, to reach 95% of the steady-state current. P= UE · Ie= steady-state power consumption in watts	Make I — le	U — Ue	cos	Ic — le	Ce Ur — Ue	cos	
alternating AC12	Control of resistive loads and solid state loads with isolation by opto couplers control of a.c. electromagnetic loads (>	1	1	0,9	1	1	0,9		
current	AC15	72VA)	10	1	0,3	1	1	0,3	
			- 1	U		lc	Ur		
			_		t 0,95	_		t 0,95	
			le	Ue		le	Ue		
Direct	DC 12	Control of resistive loads and solid state loads with isolation by opto couplers Control of d.c. electromagnets	1	1	1 ms	1	1	1 ms	
current	DC 13	s, spic stapicio statico di dio diconomiagneto	1	1	6 · P	1	1	6 · P	

The value $6 \cdot P$ results from an empirical relationship with is found to represent most d.c. magnetic loads to an upper limit of P = 50 W viz6-P = 300 ms. Loads having power consumption greater than 50 W are assumed to consist of smaller loads in parallel. Therefore 300 ms is to be an upper limit, irrespective of the power consumption value.

Attach our switching device	·	V6 S6 N61	5	VV DD6		V1	1	V5 S2-S23	VV5 SS2-SS21
Rated isolation voltage Ui in Volt		250		250		250		250	250
Rated operational voltage Ue in Volt		250		250		250		250	250
Rated operational current in Ampere AC 12		6 or	16	6 or	16	6 or	16	10	10
AC 15		2	4	2	4	2	4	2	2
DC 12	24 V	6	8	6	8	6	8	4	4
	48 V	2	4	2	4	2	4	2	2
	110 V	0,5	1	0,5	1	0,5	1	0,2	0,2
	220 V	0,1	0,5	0,1	0,5	0,1	0,5	0,1	0,1
Contacts gold-coated	24 V	5 mA		5 mA		5 mA		5 mA	5 mA
DC 13	24 V	1		1		1		3	3
	48 V	0,5		0,5		0,5		1,5	1,5
	110 V	0,2		0,2		0,2		0,1	0,1
	220 V	0,05		0,05		0,05		0,05	0,05
Short-circuit-protection in Ampere Fuse 9L Circuit-breaker G-characteristic		6 6	16 16	6 6	16 16	6 6	16 16	10 10	10 10
Terminal screws Plug-in connector CAGE CLAMP® connection is a		M 3,5		M 3,5		M 3,5		M 3,5	M3,5
registered trademarkt of WAGO Kontakttechnik GmbH Germany		2,5 mm ²		2,5 mm ²		2,5 mm ²		6,3 x 0,8	6,3 x 0,8
Conductor sizes in mm ² finely stranded with end steeves		1,5		1,5		1,5		1,5	1,5
Mechanical life in million (operation cycles) max. switching frequency c/h 1000		10		20		10		6	10
Mechanical shock resistance									

Mechanical shock resistance IEC 68-2-27

Shock-amplitude > 15 Shock duration 20 ms

Clearances and creepage distances IEC 947-1; 2.5.46.51

Overvoltage category III pollution grade 3

Technical data



Attach our switching device	V8 V85 D8	VV8 VV85 D3 S3	V10 V25 S1	V14 S14	V3	Dead man`s button signal button push button
Rated isolation voltage Ui in Volt	110	110	110	250	500	250
Rated operational voltage Ue in Volt	110	110	110	250	350	250
Rated operational voltage in Ampere AC 12	2	2	2	6	16	6
AC 15	0,5	0,5	0,5	2	4	2
DC 12 24	V 2	2	2	6	8	4
48	V 1	1	1	2	4	2
110	V 0,1	0,1	0,1	0,5	1	0,2
220	V			0,1	0,5	0,1
Contacts gold-coated 24	V 5 mA	5 mA	5 mA	5 mA	5 mA	5 mA
DC 13 24	V 1,5	1,5	1,5	1	1	3
48	V 0,5	0,5	0,5	0,5	0,5	1,5
110	V 0,05	0,05	0,05	0,2	0,2	0,1
220	V			0,05	0,05	0,05
Short-circuit-protection in Ampere Fuse 9L Circuit-breaker G-characteristic	4 4	4 4	4 4	6	16 16	6 6
Terminal screws Plug-in connector CAGE CLAMP® connection is a registered trademarkt of WAGO Kontakttechnik GmbH Germany		Solder terminal	'	M4 1,5 mm ²	M 3,5 6,3 x 0,8	6,3 x 0,8
Conductor sizes in mm ² finely stranded with end steeves	0,5	0,5	0,5	1	1,5	1,5
Mechanical life in million (operation cycles) max. switching frequency c/h 1000	10 (V8/V85) 8 (D8)	20 (VV8/VV85) 12 (D3/S3)	8	6	6	10
Mechanical shock resistance IEC 68-2-27	Shock-amplitud	e > 15 Shock dura	ation 20 ms			
Clearances and creepage distances IEC 947-1; 2.5.46.51	Overvoltage cat	egory III pollution g	rade 3			
Degree of protection to IEC/EN 60529		1. numerial prote and foreign bodi	ection of contact es		2. numerial prot	tection of water
	IP00	No protection			No protection	
	IP54	Dust-protected			protected again	st splashing water
	IP65	dust-tight			protected again	st water jets
	IP66	dust-tight			protected again jets	st powerful water
	IP67	dust-tight			protected again temporary imm	st the effects of ersion in water



The Hall-Potentiometer HG2 is distinguished by its precision and longevity.

Technical data

Mechanical life HG2 10 million operating cycles


Operation temperature -40°C to +85°C

Degree of protection IP67

Functional safety
PLd compatible (EN ISO 13849, complies SIL2

to DIN EN IEC 61508)




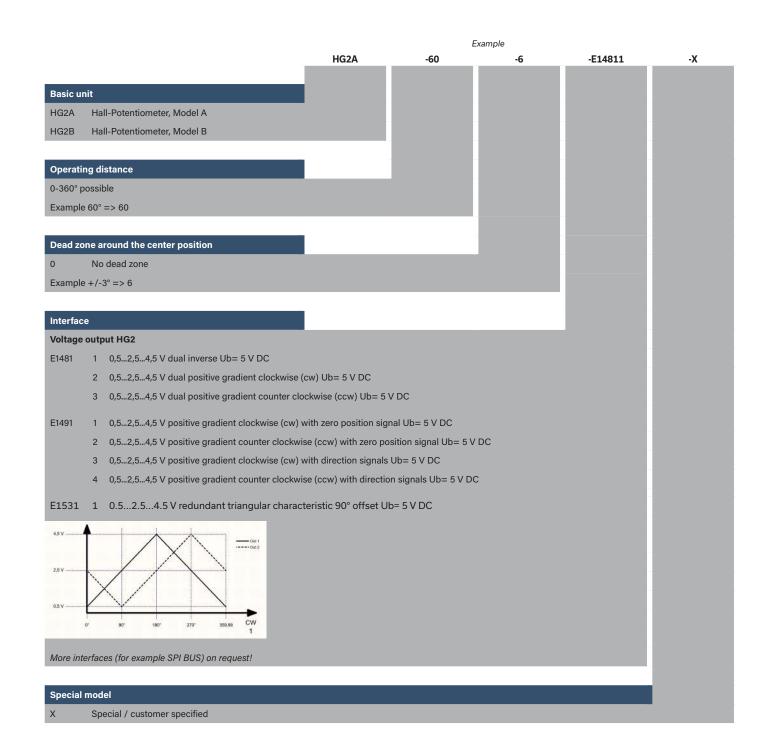








HG2A





HG2B



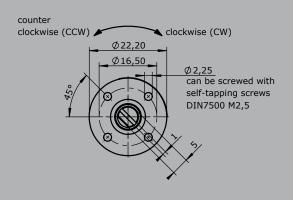

N10



The N10 is a Hall-Potentiometer for electrohydraulic and hoisting applications. Long life and high reliability is ensured by the latest contactless hall-technology. Up to 18 detent points can be integrated.

Technical data

Mechanical life N10 10 million operating cycles

Mechanical life with detent/friction brake 3 million operating cycles

Operating temperature $-40^{\circ}\text{C to } +85^{\circ}\text{C}$ Degree of protection IP67 (electronic)

Functional safety PLd compatible (EN ISO 13849, complies SIL2

to DIN EN IEC 61508)



Example N10 -90 -6 -E14811 -X Basic unit N10A Hall-Potentiometer with rotary knob **Operating distance** 360° (rotating without stop) 270° 180° 90° 0 Without detent, with friction brake 1 Detent point in middle position 3 Detent point in Position 1 4 Detent point in Position 2 R15 Detent point at intervals of 15° Dead zone around the center position No dead zone Example +/-3° => 6 Interfaces Voltage output E1481 1 0,5...2,5...4,5 V dual inverse Ub= 5 V DC 2 0,5...2,5...4,5 V dual positive gradient clockwise (cw) Ub= 5 V DC 3 0,5...2,5...4,5 V dual positive gradient counter clockwise (ccw) Ub= 5 V DC E1491 1 0,5...2,5...4,5 V positive gradient clockwise (cw) with zero position signal Ub= 5 V DC 2 0,5...2,5...4,5 V positive gradient counter clockwise (ccw) with zero position signal Ub= 5 V DC 3 0,5...2,5...4,5 V positive gradient clockwise (cw) with direction signals Ub= 5 V DC 4 0,5...2,5...4,5 V positive gradient counter clockwise (ccw) with direction signals Ub= 5 V DC E1531 0.5...2.5...4.5 V redundant triangular characteristic 90° offset Ub= 5 V DC 0.5 V


X Special / customer specified

More interfaces (for example SPI Bus) on request!

Technical details may vary based on configuration or application! Technical data subject to change without notice!





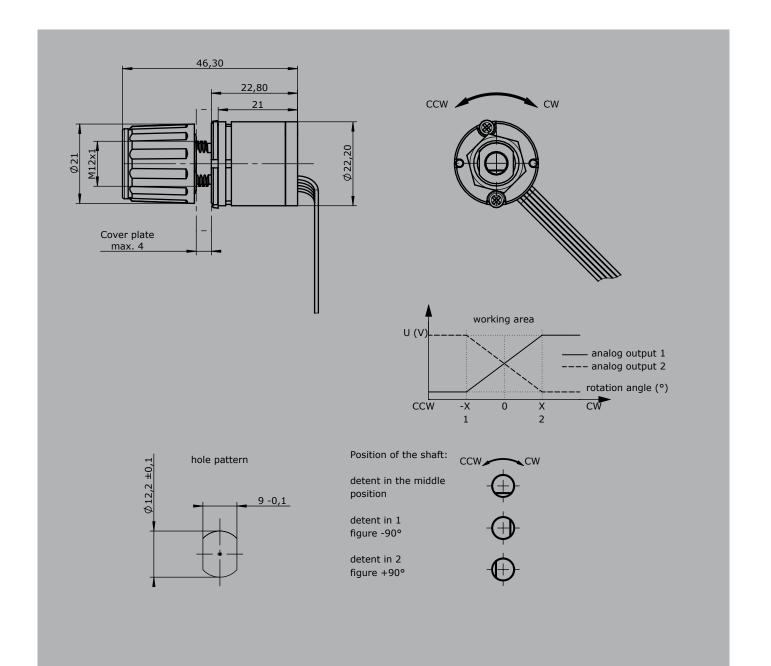

Potentiometer with attach to our switching device



							with	centre	tap life		_			
		c	(mA)			«Ohm	hm	hm)	hm.	Ohm	0,52,54,5 V / 2,50,5 V		Addition for Part No.	
for mounting		Capacity (W)	lmax wiper (mA)		Expansion	2 x 0,5 kOhm	$2 \times 1 \text{ kOhm}$	2 x 2 kOhm	2 x 5 kOhm	2 x 10 kOhm	Hall 0,5 4,52,5	Part No.	Addition	
on	Typ	Čak	<u>E</u>	Typ	EXE	1	2	3	4	5				Comment
V6 / VV6 D64 / DD64	T1420	1,5	10	P44		х	х	х	X	х		524004400		
V5 / VV5 V3	T132	2,5	10			X	х	х	х	х		524000500		
S2 / SS2	T132 Öl	2,5	10	P06		X	X		Х	Х		524000600		
S6 N6	T178	1,5	10			-	X	Х	Х			524000700		characteristic progressive
P7 P8	T238	1	10	P08		X	X	Х	X	x*1		524000800		*1 R= 2 x 6,5 kOhm
	T133 T396	60 0,5	85 1	P10		X						524001000 524001300		
	T1350 Ex	0,5	1	P13		X	x	X	X	X		524001300		
	T1350 LX	0,5	1	P43		 ^	^	Х	Х	^	х	524001400		
V8 / VV8		1	10			\vdash	<u> </u>	<u> </u>	<u> </u>	<u> </u>				
D8	T239 T301	0,5	10	P17		-		X	X			524001700 524001800		
P10 P11	T426	0,5	1	P19		<u> </u>	Х	Х	x	X		524001800		with direction lines
P12	T432	0,5	1	P20		\vdash			X	^		524002000		with direction lines
	T246	0,5	1	P21		x	x		X	х		524002100		
	T362	0,5	1	P22		H	х	х	х			524002200		
	T1003			P42							х	5240042009		
	T1360			P43							х	5240043009		
V10	T321	1	10	P24		=	x					524002400		
S1 Palm handle	T320	0,5	1	P25			X		х			524002500		
Faiiti tiaticie	T1187	0,5	1	P27					x			524002700		with direction lines
	T375	0,5	1	P37			х		х			524003700		
	T997			P41							х	5240041009		
V11	T316	1	10	P31			Ì		x*2			524003100		*2 R= 2 x 4 kOhm
	T365	0,5	1	P32					х	х		524003200		
D3 S3	T318	0,5	1	P48					х			524004800		
						١	vithout	centre	tap life					
													Part	
			Ą			E				_			for	
		$\widetilde{\mathbb{S}}$	er (n		5	0,5 kOhm	1 kOhm	2 kOhm	5 kOhm	10 kOhm			Addition for Part No.	
		Capacity (W)	lmax wiper (mA)		Expansion	0,5	1 K	2 K(5 K(10		Part No.	Adc No.	
for mounting on	Typ	Cap	lma	Тур	Exp	1	2	3	4	5				Commend
V6 / VV6	T1491	1,5	10	P46		х	х	х	х	х		524004600		
D64 / DD64 V5 / VV5	T131	2,5	10	P03		х	х	х	х	х		524000300		
V3 S2 / SS2	T131 Oil	2,5	10	P04			х		х	х		524000400		
S6	T134	60	85	P11					х			524001100		
N6 P7 / P8	T374	0,5	1	P12		х	х	х	х	х		524001200		
V8 / VV8 /D8	T244	0,5	1	P23				х	х	х		524002300		
P10/P11/P12	T397	0,5	1	P47			х	х	х			524004700		
V10 / S1 Palm grip	T337	0,5	1	P26			х	х	х	х		524002600		
GE1/GE2	PW70	5	30	P45		х	х		х			524004500		


 $Technical\ details\ may\ vary\ based\ on\ configuration\ or\ application!\ Technical\ data\ subject\ to\ change\ without\ notice!$

Opto-Electronic Encoder OEC 2



Opto-electronical encoder OEC 2 with digital output gray-/binär-cdode											
Power supply	18-30 V DC										
Rotation angle	Max. +/-150° (by 9 Bit 300°)										
Digital output	8 Bit Gray-Code T359	Output characteristic linear	OEC 2-1-1	C01	410 g						
	8 Bit Binary-Code T359	Output characteristic linear	OEC 2-2-1	C02	410 g						
	6 Bit Gray-Code T359	Output characteristic linear	OEC 2-3-1	C031	410 g						
	6 Bit Gray-Code T359	Output characteristic quadratic	OEC 2-3-2	C032	410 g						
	6 Bit Binary-Code T359	Output characteristic linear	OEC 2-4-1	C041	410 g						
	6 Bit Binary-Code T359	Output characteristic quadratic	OEC 2-4-2	C042	410 g						
	9 Bit Gray-Code T384	Output characteristic linear one side clockwise	OEC 2-5-4	C054	410 g						
	9 Bit Gray-Code T384	Output characteristic linear one side anticlockwise	OEC 2-5-5	C055	410 g						
	9 Bit Binary-Code T384	Output characteristic linear one side clockwise	OEC 2-6-4	C064	410 g						
	9 Bit Binary-Code T384	Output characteristic linear one side anticlockwise	OEC 2-6-5	C065	410 g						

6 Bi	t-type T359		8-Bi	t-type T359		9 Bi	9 Bit-type T384			
PIN	connection	Colour-code	PIN	connection	Colour-code	PIN	connection	Colour-code		
1	Not connected	-	1	Not connected	-	1	Not connected	-		
2	D4	brown	2	D6	brown	2	D6	brown		
3	D3	green	3	D5	green	3	D5	green		
4	D2	yellow	4	D4	yellow	4	D4	yellow		
5	D1	grey	5	D3	grey	5	D3	grey		
6	Not connected	-	6	D2	pink	6	D2	pink		
7	Not connected	-	7	D1	blue	7	D1	blue		
8	Housing 0 V	black	8	Housing 0 V	black	8	Housing 0 V	black		
9	Input 18-30 V DC	red	9	Input 18-30 V DC	red	9	Input 18-30 V DC	red		
10	Not connected	-	10	Not connected	-	10	Not connected	-		
11	Not connected	-	11	Not connected	-	11	Not connected	-		
12	Direction-signal left	violet	12	Direction-signal left	violett	12	Direction-signal left	violett		
13	Direction-signal grey	grey-pink	13	Direction-signal right	grey-pink	13	D9	grey-pink		
14	D6	red-blue	14	D8	red-blue	14	D8	red-blue		
15	D5	white-green	15	D7	white-green	15	D7	white-green		
-	Cable screen	brown-green	-	Cable screen	brown-green	-	Cable screen	brown-green		

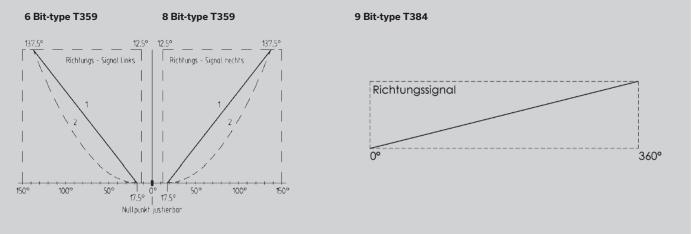


Technical details may vary based on configuration or application! Technical data subject to change without notice!


Opto-Electronic Encoder OEC 2



Opto-electronical encod	der OEC 2 with voltage output				
Power supply	18 - 30 V DC				
Scanning	6 Bit Gray-Code				
Rotation angle	Max. +/-150°				
Voltage output	10010 V T366	Output characteristic linear	OEC 2-3-1-1	C111	410 g
	10010 V T366	Output characteristic quadratic	OEC 2-3-2-1	C112	410 g
	-100+10 V T367	Output characteristic linear	OEC 2-3-1-2	C151	410 g
	-100+10 V T367	Output characteristic quadratic	OEC 2-3-2-2	C152	410 g

Voltage output		
PIN connection		Colour-code
1	Not connected	-
2	Not connected	-
3	Not connected	-
4	Not connected	-
5	Not connected	-
6	Not connected	-
7	Not connected	-
8	Housing 0V	blue
9	Input 18-30V DC	brown
10	Not connected	
11	Voltage output	green
12	Direction signal left	yellow
13	Direction signal right	grey
14	Not connected	-
15	Not connected	-
-	Cable screen	white

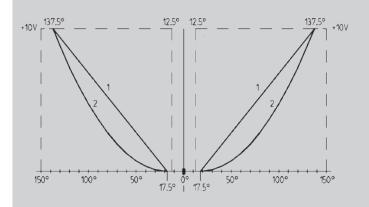

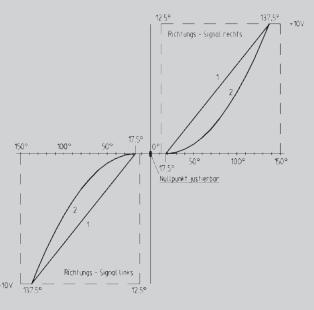



Opto-Electronic Encoder OEC 2



Opto-electronical encoder OE	C 2 with current output				
Power supply	18 - 30 V DC				
Scanning	6 Bit Gray-Code				
Rotation angle	Max. +/-150°				
Output current	20420 mA T368	Output characteristic linear	OEC 2-3-1-5	C191	410 g
	20420 mA T368	Output characteristic quadratic	OEC 2-3-2-5	C192	410 g
	20020 mA T368	Output characteristic linear	OEC 2-3-1-8	C201	410 g
	20020 mA T368	Output characteristic quadratic	OEC 2-3-2-8	C202	410 g
	-200+20 mA T369	Output characteristic linear	OEC 2-3-1-6	C231	410 g
	-200+20 mA T369	Output characteristic quadratic	OEC 2-3-2-6	C232	410 g

6 Bit	-Type T368		6 Bit-1	Гуре Т369	
PIN	connection	Colour-code	PIN co	onnection	Colour-code
1	Not connected	-	1	Not connected	-
2	Not connected	-	2	Not connected	-
3	Not connected	-	3	Not connected	-
4	Not connected	-	4	Not connected	-
5	Not connected	-	5	Not connected	-
6	Not connected	-	6	Not connected	-
7	Not connected	-	7	Not connected	-
8	Housing 0 V	blue	8	Housing 0V	blue
9	Input 18-30 V DC	brown	9	Input 18-30 V DC	brown
10	Not connected	-	10	Not connected	-
11	Current output	green	11	Current output	green
12	Direction signal left	yellow	12	Direction signal left	yellow
13	Direction signal right	grey	13	Direction signal right	grey
14	Not connected	-	14	Not connected	-
15	Not connected	-	15	Not connected	-
-	Cable screen	white	-	Cable screen	white

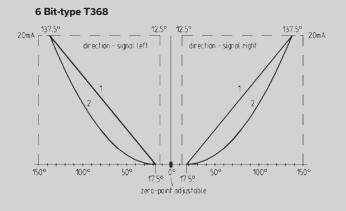

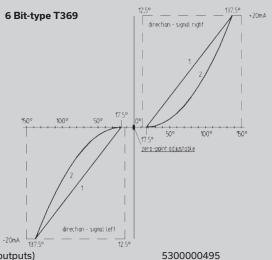

Attachment

Plug with cable 14 x 0,25 mm², 2000 mm long, cable head open (for OEC 2 with digital outputs)

5300000496

Plug with cable 7 x 0,34 mm², 2000 mm long, cable head open (for OEC 2 with analog outputs)

The OEC 2 is able for mounting on V6,VV6/D64,DD64/V11/S2,SS2/S6/N6. For mounting a potentiometer mounting option (P) of the respective controller is required!


Opto-Electronic Encoder


OEC 4


with interface Profibus DP



Opto-elecetronic encoder				
Power supply	18 - 30 V DC			
Scanning	6, 8 or 9 Bit Gray-Code			
Rotation angle	Max. +/-150°			
Interface	Profibus, DP, address 0-99 adjustable above selector switch			
Voltage output	8 Bit Gray-Code T496 linear	OEC 4-1-1-2	C27	820 g
	8 Bit Binary-Code T496 linear	OEC 4-2-1-2	C28	820 g
	6 Bit Gray-Code T496 linear	OEC 4-3-1-2	C291	820 g
	6 Bit Gray-Code T496 quadratic	OEC 4-3-2-2	C292	820 g
	6 Bit Binary-Code T496 linear	OEC 4-4-1-2	C301	820 g
	6 Bit Binary-Code T496 quadratic	OEC 4-4-2-2	C302	820 g
	9 Bit Gray-Code T497 linear one sided right turn	OEC 4-5-4-2	C314	820 g
	9 Bit Gray-Code T497 linear one sided left turn	OEC 4-5-5-2	C315	820 g
	9 Bit Binary-Code T497 linear one sided right turn	OEC 4-6-4-2	C324	820 g
	9 Bit Binary-Code T497 linear one sided left turn	OEC 4-6-5-2	C325	820 g

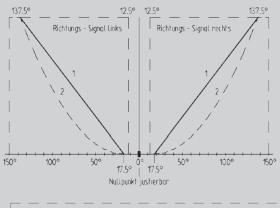

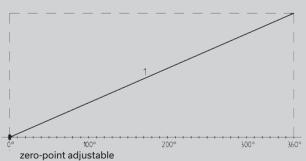

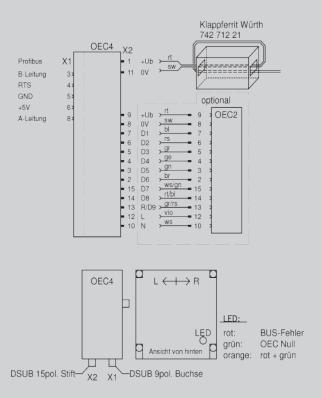

Attachment


- X1 Plug (Profibus) straight
- X1 Plug (Profibus) 90° angled
- X2 Plug with cable 2 x 0,25 mm², 2000 mm long, cable head open (cable for current supply OEC 4 single application)
- X2 Connecting cable OEC 4/ OEC 2 (14 x 0,25 mm²) with 2 plug connectors incl. cable for current supply (2 x 0,25 mm² 2000 mm long, cable head open)


The OEC 4 is able for mounting on V6,VV6/D64,DD64/V11/S2,SS2/S6/N6. For mounting a potentiometer mounting option (P) of the respective controller is required! For a controller with one axis is required 1 piece of OEC 4, for a controller with 2 axis are required 1 piece of OEC 4 and 1 piece of OEC 2.

Opto-Electronic Encoder OEC 2, OEC 4





OEC 2

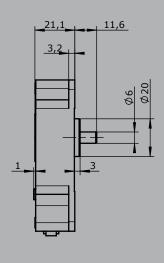

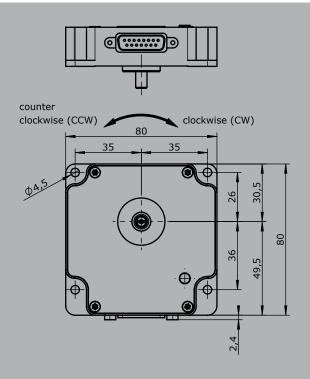

OEC 4

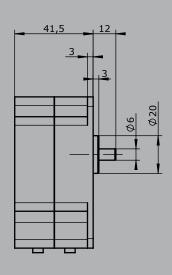

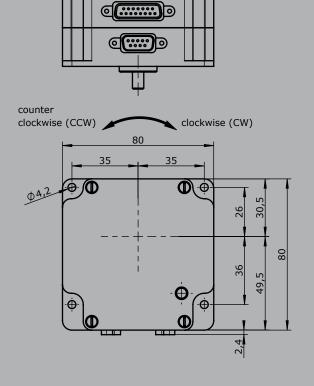

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Electronic Control Unit





The Electronic Control Unit ES/43 serves for control of proportional valves without position control. There is a version for 4 proportional valve solenoids (ES / 43-10) and a version for 2 Proportional valve solenoids (ES / 43-11) available.

Features:

- Stabailized voltage
- Chopper output stage with adjustable frequency
- Ramp time setting ON/OFF delay
 Creep speed circuit adjustable
- Solenoid current setting separate for minimum current and maximum current
- Output current controlled independently of temperature and solenoid
- Power output short-circuit-proof with overload protection
- Voltage input protected against polarity reversal
- Mechanical selection of direction by means of contacts
- LED operating voltage and working display
- Microprocessor technology therefore especially adaptable



Example

Technical data:

- Operating temperature

- Storage temperature

- Supply voltage		10	32 V DC
- Residual ripple		20%	
- Control voltage range	Ue	0	5 V
- Control current	le	< 1mA	
- Dither frequency	f	25	250Hz
- Proportional valve S 1-4	I min.	0	1A
Output	I max. = I min		2A at 12 Volt
Output	I max. = I min		1A at 24 Volt
- Ramp time setting	ton	0,2	25 sec
	t off	0,2	25 sec
- Creep speed	variable reduction		2575%


-40°C to +85°C -40°C to +80°C

Electronic Control Unit for 4 proportional valves solenoid ES/43-10


Electronic Control Unit for 2 proportional valves solenoid ES/43-11

Electronic Control Unit ES/43



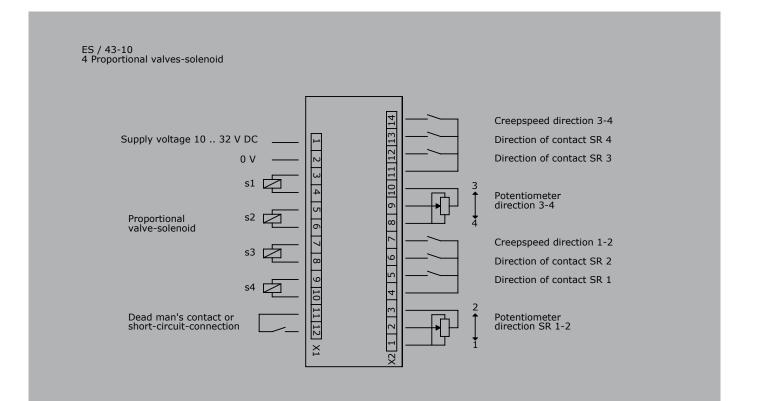

ES / 43-11 2 Proportional valves-solenoid

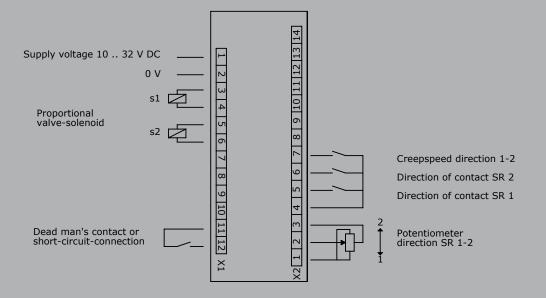

Mini-Joystick





The V21 is a Mini-Joystick commonly used in electro-hydraulic applications. The V21 is especially suitable for installation in our ball grips. Long life and high reliability is ensured by the latest contactless hall-technology.

Technical data

Mechanical life 5 million operating cycles


1,6 to 3,5N Operating force 5V DC stabilized Supply voltage -40°C to +85°C Operation temperature

Degree of protection

PLd compatible (EN ISO 13849, complies SIL2 Functional safety


to DIN EN IEC 61508)



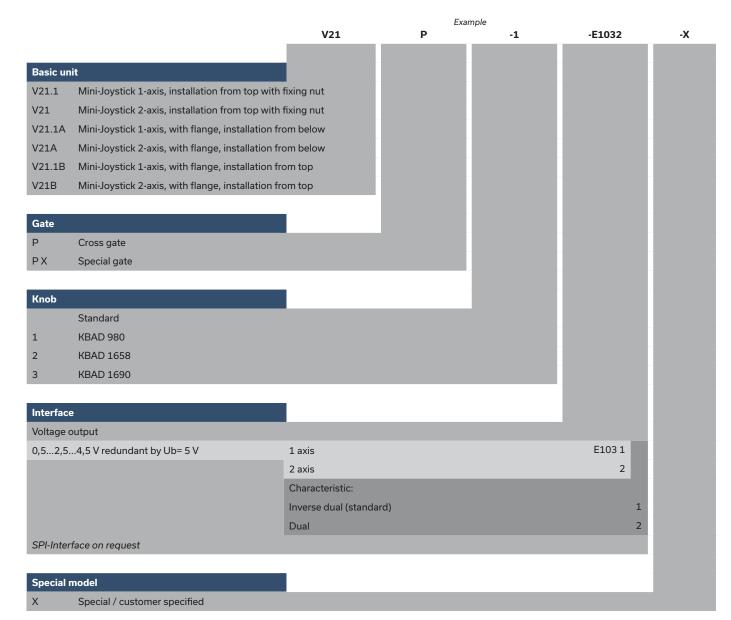

Mini-Joystick V21



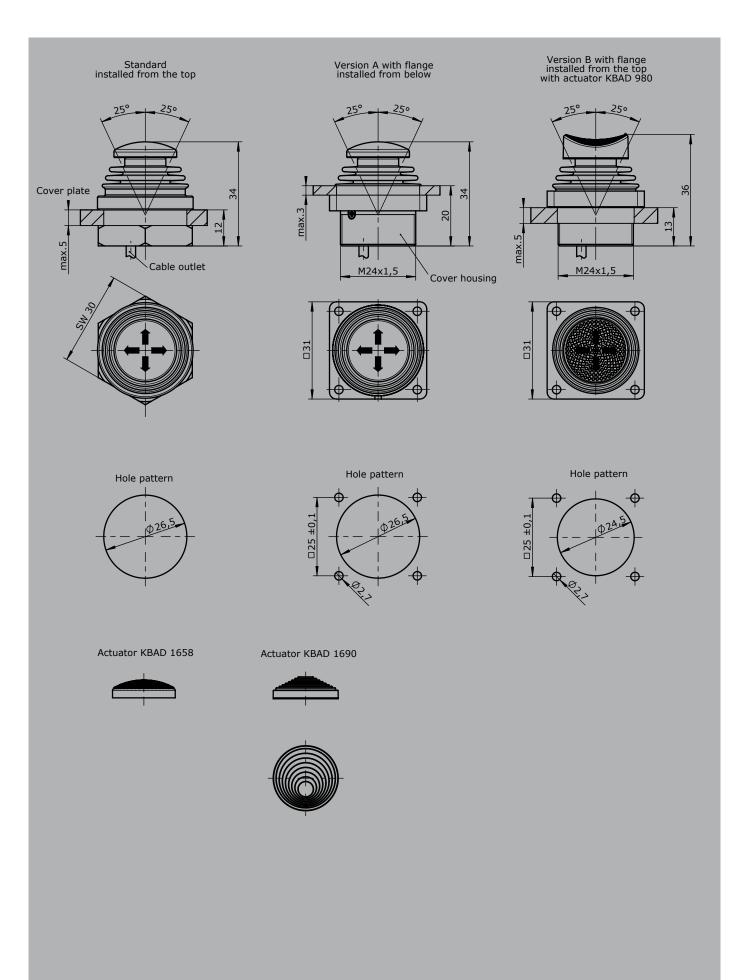

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Mini-Joystick





The Mini-Joystick S9 is a hallsensor switching device designed for electro-hydraulic applications. Long life and high reliability is ensured by the latest contactless hall-technology. Due to its small size, the S9 is particularly suitable for installation in our ball handles.

Technical data

Mechanical life 5 million operating cycles

Operating force 1,6 to 3,5N 5V DC stabilized Supply voltage -40°C to +85°C Operating temperature

Degree of protection


PLd compatible (EN ISO 13849, complies SIL2 to DIN EN IEC 61508) Functional safety



Example - E10311 - X S9 Basic unit S9 Mini-Joystick Interface E1031 0,5...2,5...4,5 V redundant by Ub= 5 V Output option inverse dual 1 Output option dual 2 Special model Special / customer specified

Mini-Joystick



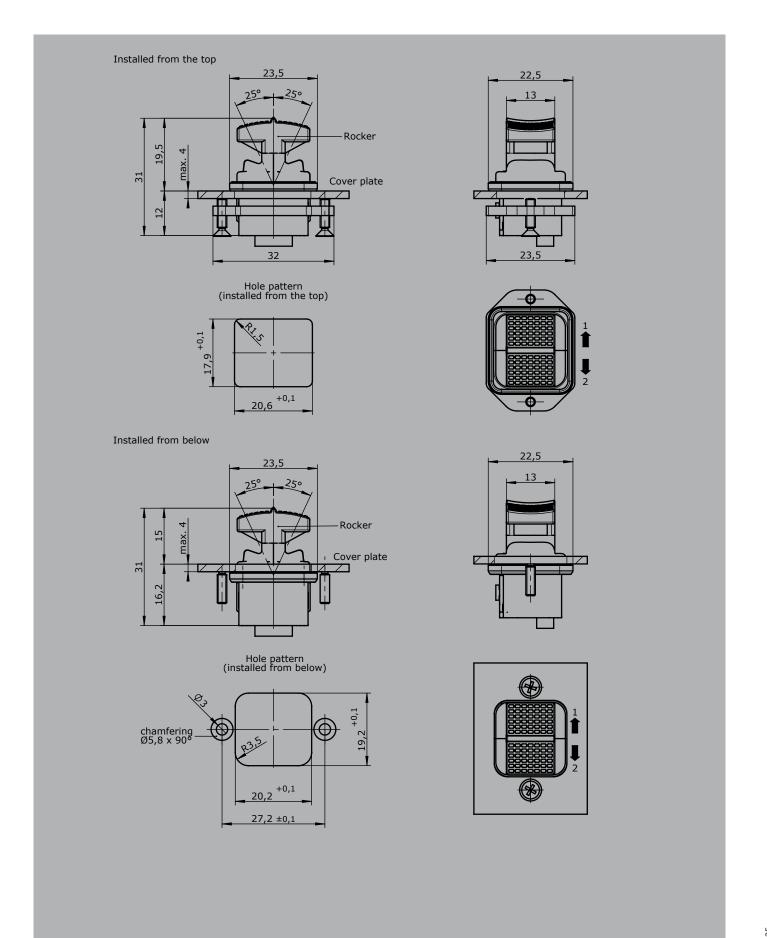

Fingertip Joystick S15



The S15 is a Fingertip Joystick designed for electro-hydraulic applications. A long service life and high reliability is achieved by the latest contactless hall-technology. With the different actuator colours the appearance can be individually designed.

Technical data

Mechanical life 5 million operating cycles


-40°C to +85°C Operating temperature

Degree of protection IP67

PLd compatible (EN ISO 13849, complies SIL2 Functional safety


to DIN EN IEC 61508)



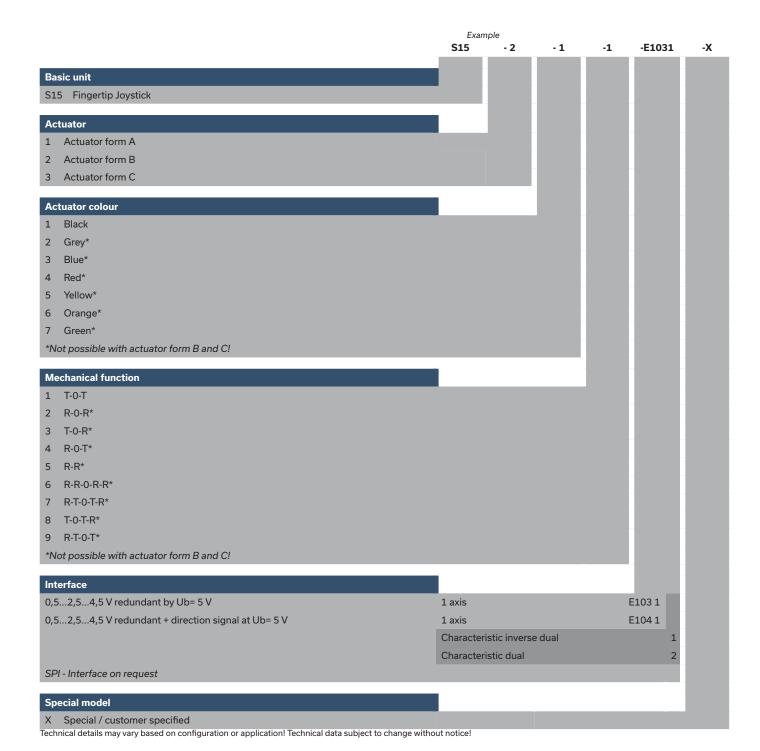

Fingertip Joystick S15



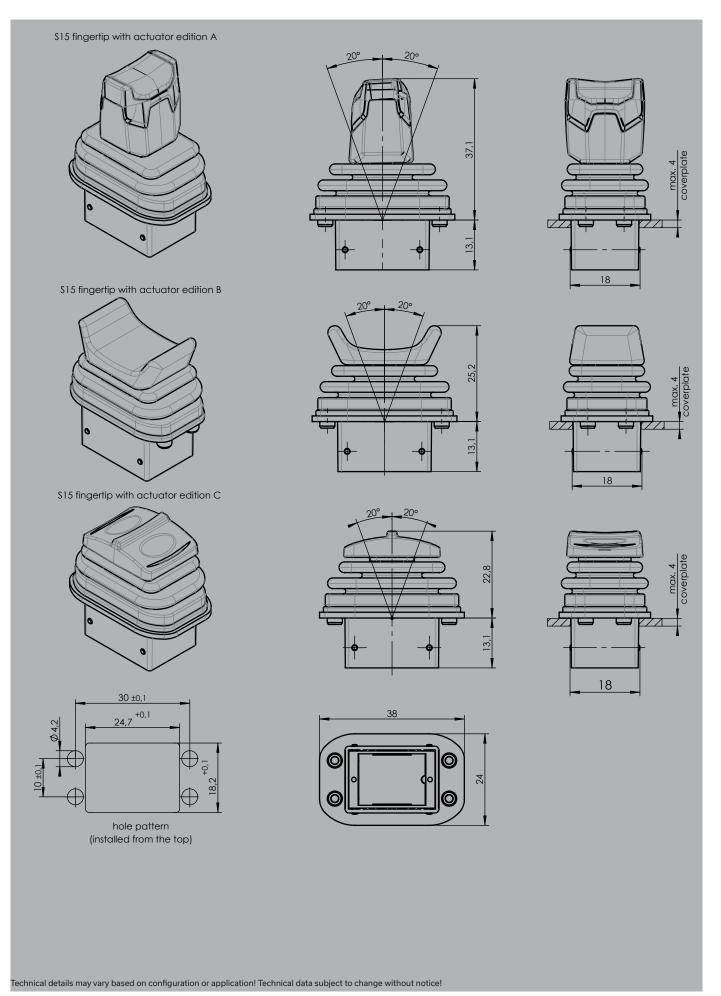





The S17 is a Fingertip Joystick designed for electro-hydraulic applications. A long service life and high reliability is achieved by the latest contactless hall-technology.

Technical data

Mechanical life 5 million operating cycles


Operating temperature -40°C to +85°C

Degree of protection

PLd compatible (EN ISO 13849, complies SIL2 Functional safety

to DIN EN IEC 61508)




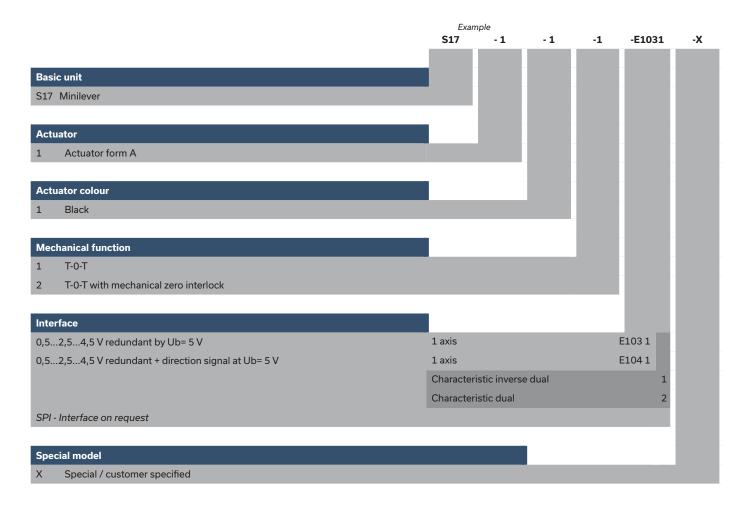


Minilever S17




S17 Minilever




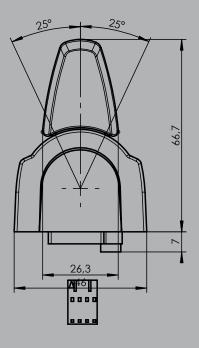


26,2 Max. 4 Cover plate

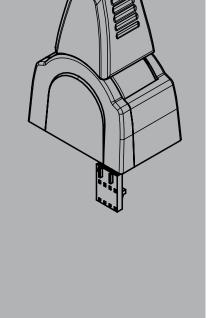

S17 Minilever with zero interlock

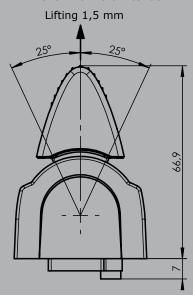





Technical details may vary based on configuration or application! Technical data subject to change without notice!

Hall-Cross Switch



The Hall-Cross Switch HK1 is a contactless Mini-Joystick designed for electro-hydraulic applications. Different actuators are available. Optionally a version with Push button is possible.


Technical data

Mechanical life 1 million operating cycles

Operating temperature -40°C to +85°C

Degree of protection IP67 (electronic)



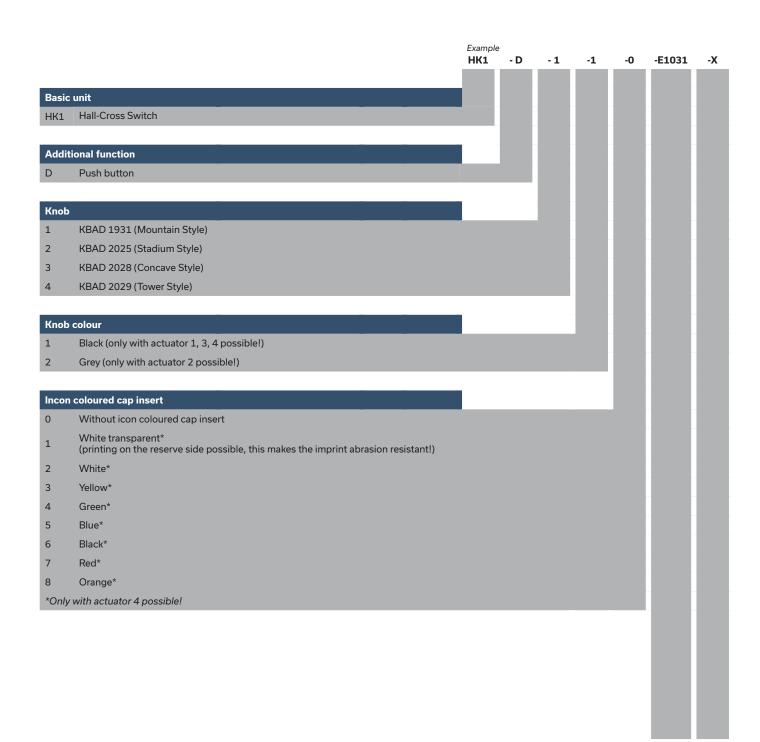






		HK1	- D	- 1	-1	-0	-E1031	-х
Interface								
Digital output								
2 direction signal per axis								
		1 axis				E004	1	
		2 axis					2	
Voltage output								
0,52,54,5 V redundant at Ub = 5 V								
		1 axis				E103 1		
		2 axis				2		
		Charac	teristics:					
		Inverse	dual (sta	andard)			1	
		Dual					2	
Special model								
X Special / customer specified								

Hall-Cross Switch



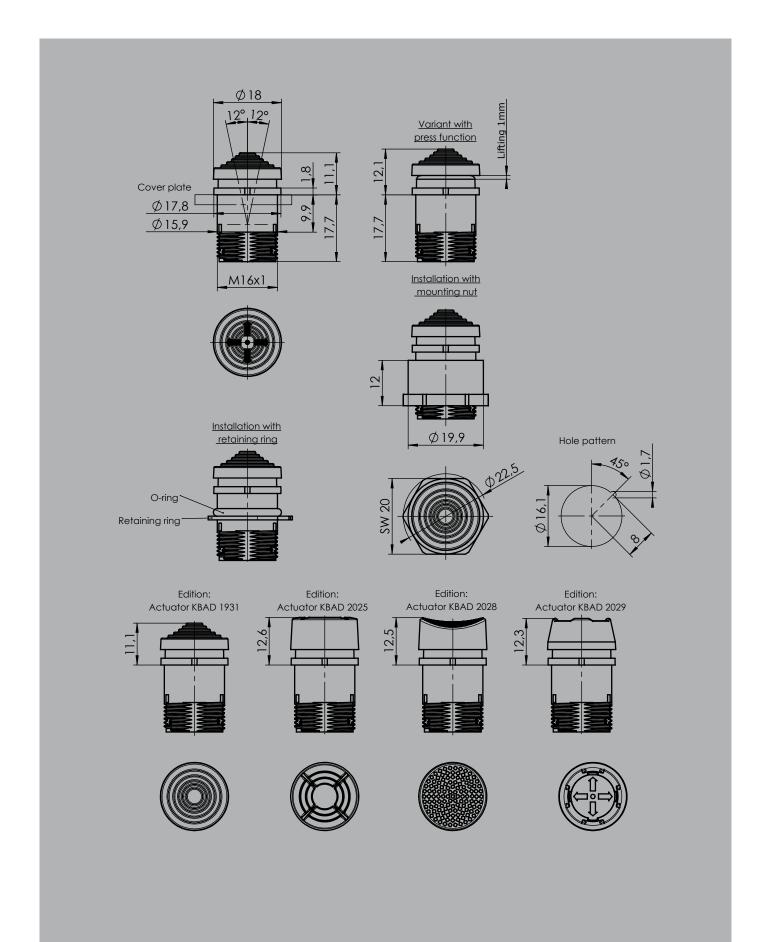

Thumbwheel



The Thumbwheel S12 is designed for electro-hydraulic applications. Long life and high reliability is ensured by the latest contactless hall-technology. By the combination of different actuators, lighting options and colours you can customise the appearance.

Technical data

Mechanical life 5 million operating cycles

-40°C to +85°C Operating temperature

IP67 Degree of protection

PLd compatible (EN ISO 13849, complies SIL2 to DIN EN IEC 61508) Functional safety

S12



Basic unit
S12 Thumbwheel
S12B Thumbwheel with actuator version B
S12C Thumbwheel with actuator version C
Mounting frame

With mounting frame

Without mounting frame

Illumination

- 1 Unlighted
- 2 Functional lighting 2-colour red-green (separate switchable) U_LED= 4,5 - 5,5 V*
- 3 Functional lighting 2-colour white-red (separate switchable) U_LED= 4,5 - 5,5 V*
- Functional lighting 2-colour white-green (separate switchable) U_LED= 4,5 5,5 V*


*Not possible with S12B and S12C!

Act	tuator colour				
		S12	S12B	S12C	
1	Black	\checkmark	\checkmark	\checkmark	
2	Grey	\checkmark			
3	Blue	\checkmark			
4	Red	\checkmark		√	
5	Yellow	\checkmark			
6	Orange	\checkmark		\checkmark	
7	Green	√		√	








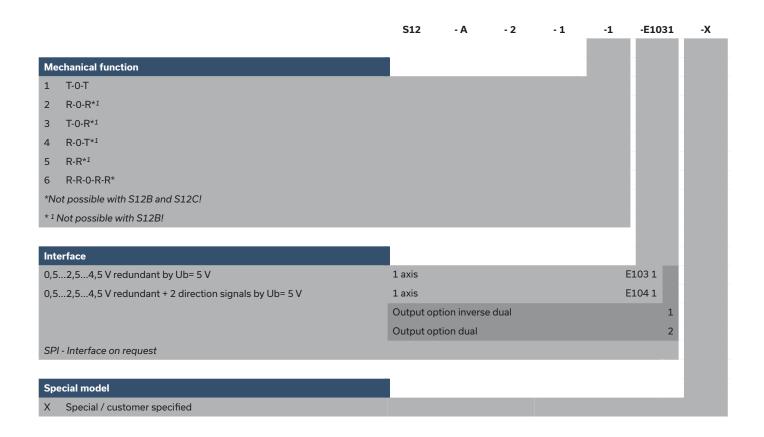

Thumbwheel S12



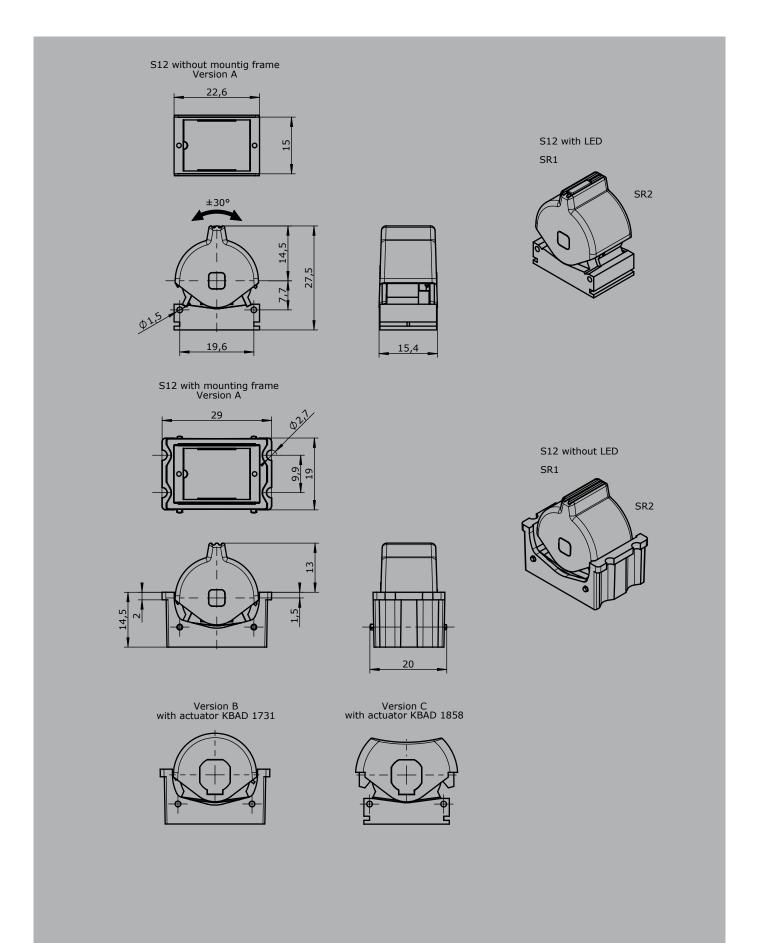

Thumbwheel S16



The Thumbwheel S16 is designed for electro-hydraulic applications. The S16 can be optimally used with the scroll and push function as a selection device for displays.


Technical data

Mechanical life 5 million operating cycles

Operating temperature -40°C to +85°C


Degree of protection IP67



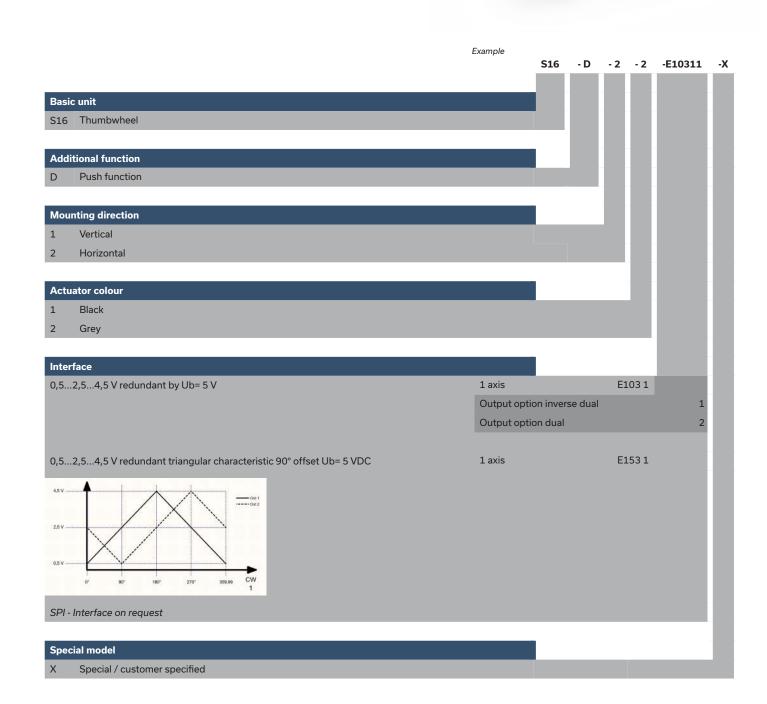

Thumbwheel S16



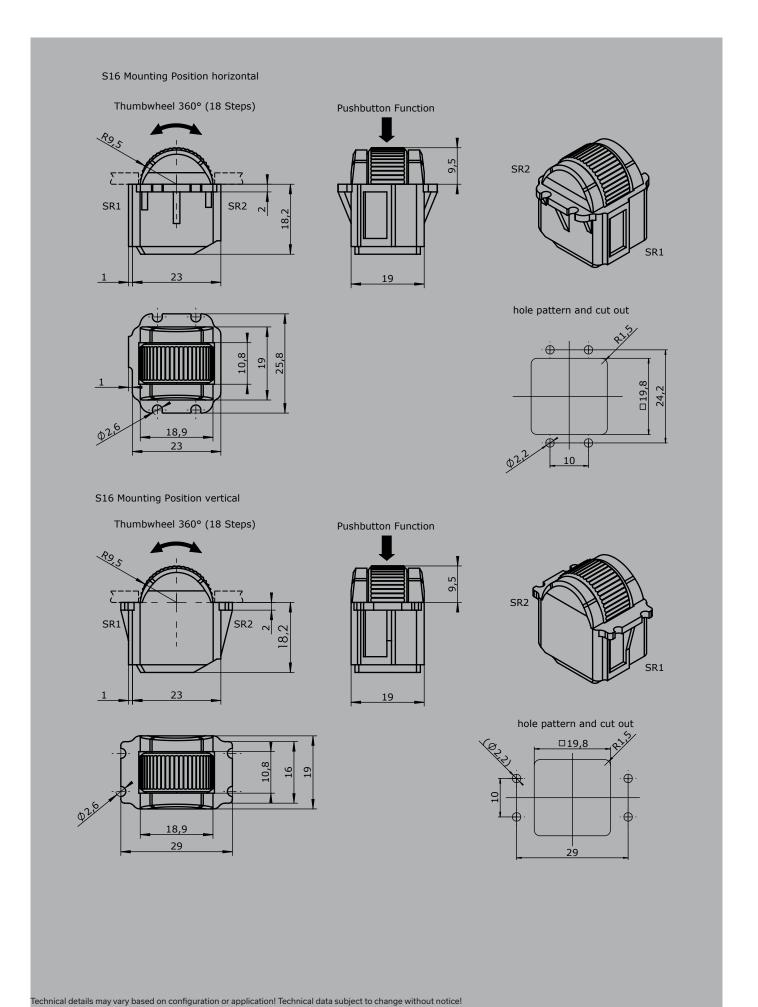

Hall-Push Button



The Hall-Push Button impressed by its durability and versatility. It is available in five basic versions. By combining different lighting options, colours and symbols, it is possible to customize.

Technical data


Mechanical life 10 million operating cycles

Operation temperature -40°C til +85°C

Functional safety PLd compatible (EN ISO 13849, complies SIL2

to DIN EN IEC 61508)



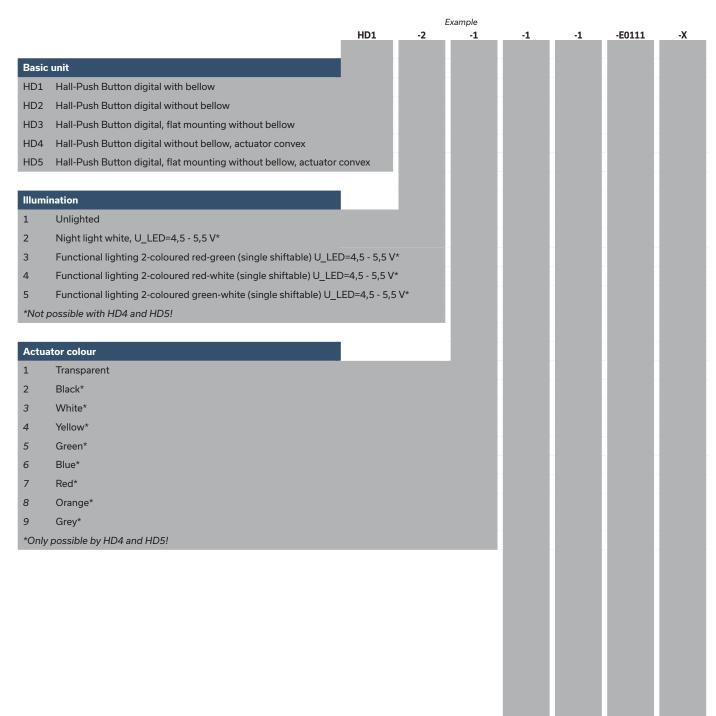






			HD1	-2	-1	-1	-1	-E0111	-X
Icon co	loured cap insert				-				
0	Without icon coloured cap insert	(only for HD4 and HD5)							
1	White transparent* (Print on back		nt is resista	nt to abras	ion!)				
2	White*				·-··,				
3	Yellow*								
4	Green*								
5	Blue*								
6	Black*								
7	Red*								
8	Orange*								
9	Grey*								
*Not po	ssible with HD4 and HD5!								
з Х	Custom-made	kample. 30244 - acoustic signa	ai, HOIII / 13	<i>J</i> 7000 Syl	11001 0244)				
S	Symbol according to ISO 7000 (e	xample: S0244 - acoustic sign	al, horn / IS	O 7000 syr	mbol 0244)				
٨	Custom-made								
Interfa	:e								
E0101	Push button signal not redun	dant Ub=4,5 - 5,5 V DC							
E0111	Push button signal redundan	t Ub=4,5 - 5,5 V DC							
E0201	Push button signal not redun	dant Ub=4 - 32 V DC							
E0211	Push button signal redundan	t Ub=4 - 32 V DC							
	0 Energy safe I (Hall) max. = 3,2	2 mA (limited)							
	1 Possible for optocoupler and	PLC							
	2 Power switch (Open Drain) I_	Hallmax= 25 mA							
Special	model								
Χ	Special / customer specified								

Hall-Push Button



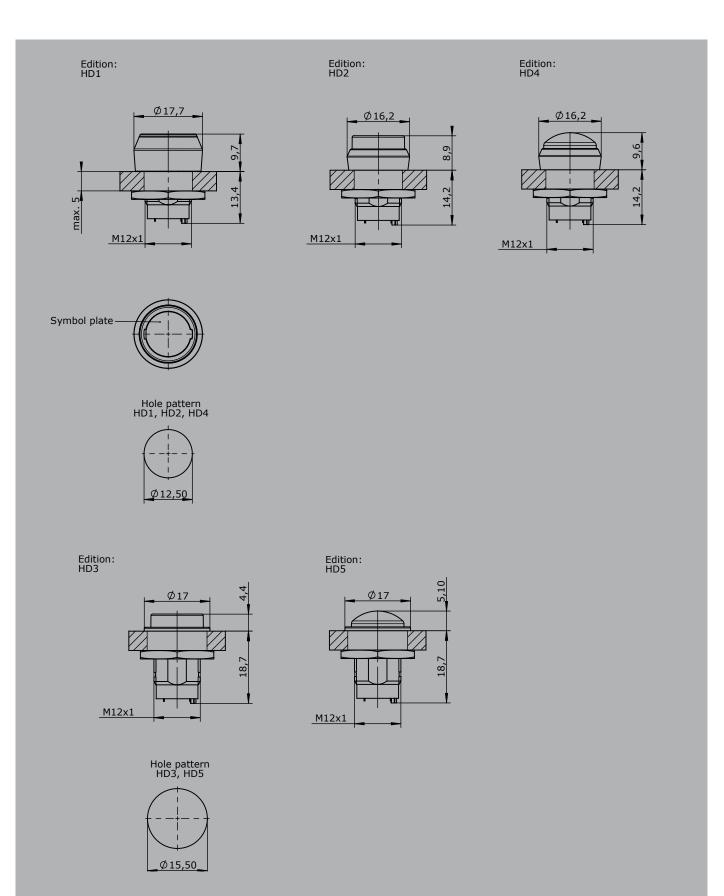

Technical details may vary based on configuration or application! Technical data subject to change without notice!







The Palm Grip B36 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm^2 , 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC 13 (*1 0,1A 24 V DC13)



		B36	Example -2D	w	К	SE	S12	H13	-X
Basic	unit								
B36	Palm Grip								
Digita	l actuating element								
D	Push Button KDA21 *1								
	Colour: red, black, yellow, green, blue, white, orange								
HD	Hall-Push Button (see page 160)								
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	white							
SE	Sensor Button capacitive with external control electronics								
S	Sensor Button capacitive without external control electronics								
	(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with the consistent with V85 / VV85 with the consistency with V85 / VV85 with the consistency with V85 / VV85 / VV85 / VV85 with V85 / VV85 /	interfa	aces E3xx	+ E4xx +	E6xx +	E7xx			
	+ E907)								
V	Vibration								
Analo	g actuating element								
S12	Thumbwheel, output 0,52,54,5 V inverse dual (see page 155)								
S16	Thumbwheel, output 0,52,54,5 V inverse dual (see page 158)								
V21	Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144)								
НК	Hall-Cross Switch (see page 152)								
H13	Hall-Rotary Grip, output 0,52,54,5 V inverse dual								
Speci	al model								
X	Special / customer specified								




B36R

Hall push button installed Pos. 1-5 Hall push button installed Pos. 7-8




58

Hall push button installed Pos. 5




Hall push button installed Pos. 5-6




B36L

Hall push button installed Pos. 1+2, 9+10 Rocker switch installed Pos. 3-4






Rocker switch installed Pos. 6



Rocker switch installed Pos. 5+6



Edition: B36 Rocker switch installed Pos. 1-3 Rocker switch installed Pos. 2-4

Edition: B36 Rocker switch installed Pos. 1-2 Rocker switch installed Pos. 3-4

Edition: B36 Rocker switch installed Pos. 1-3 Hall push button installed Pos. 2+4

Edition: B36 Rocker switch installed Pos. 1-2 Hall push button installed Pos. 3+4















The Palm Grip B35 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm^2 , 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C


Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC 13 (*1 0,1A 24 V DC13)



		B35	Example -2D	w	К	SE	S12	H13	-)
Basic	unit								
B35	Palm Grip								
Digita	al actuating element								
D	Push Button KDA21 *1								
	Colour: red, black, yellow, green, blue, white, orange								
HD	Hall-Push Button (see page 160)								
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	, white							
К	Lever switch								
SE	Sensor Button capacitive with external control electronics								
S	Sensor Button capacitive without external control electronics								
	(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with the consistent with V85 / VV85 with the consistency with V85 / VV85 with V85 / VV85 with the consistency with V85 / VV85 / VV85 with V85 / VV85 / VV85 with V85 / VV85 with V85 / VV85 / V	h interfa	ices E3xx	+ E4xx +	E6xx + I	E7xx			
	+ E907)								
V	Vibration								
Analo	g actuating element								
S12	Thumbwheel, output 0,52,54,5 V inverse dual (see page 155)								
S16	Thumbwheel, output 0,52,54,5 V inverse dual (see page 158)								
/21	Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144)								
НΚ	Hall-Cross Switch (see page 152)								
H13	Hall-Rotary Grip, output 0,52,54,5 V inverse dual								

Special / customer specified

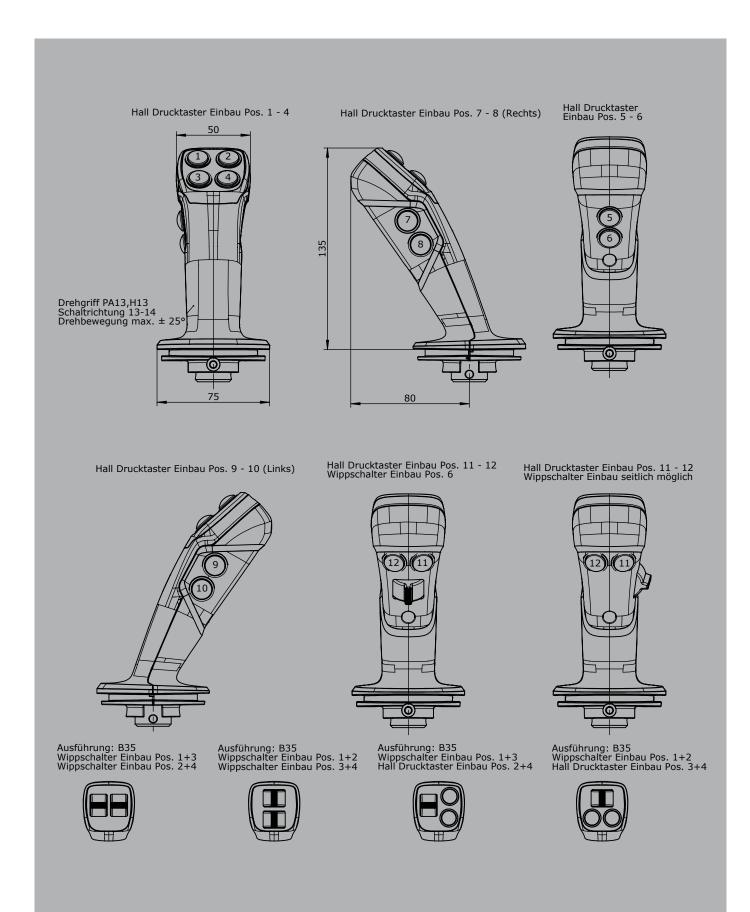







The Palm Grip B34 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technische Daten

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

1,5A 24 V DC 13 (*1 0,1A 24 V DC13) Contact complement



	Example			
B34L	-2D	W	S12	-X

Basic unit

B34L Palm Grip left B34R Palm Grip right

Digitale actuating element

D Push Button KDA21 *1

Colour: red, black, yellow, green, blue, white, orange

HD Hall-Push Button (see page 160)

Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, white Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R W

К Lever switch

SE Sensor Button capacitive with external control electronics

S Sensor Button capacitive without external control electronics

(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with interfaces E3xx + E4xx +E6xx

+ E7xx + E907)

Analog actuating element

S12 Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 155)

S16 Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 158)


Special model


Special / customer specified

Palm Grip




B34




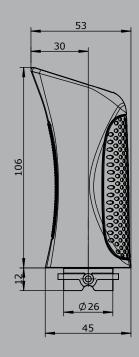

Edition:


Push button installed Pos. 1-3 Rocker switch installed Pos. 4-5 Lever switch installed Pos. 6 Position rocker switch or push button left hand ()





Edition:

Push button installed Pos. 1-3,4,5 Lever switch installed Pos. 6

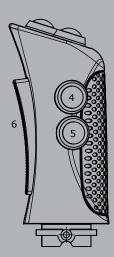







The Palm Grip B33 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement *1 0,1A 24 V DC13



B33L -2D S12 -X

Example

Basic unit

B33L Palm Grip left

B33R Palm Grip right

Digitale actuating element

D Push Button KDA21 *1

Colour: red, black, yellow, green, blue, white, orange

HD Hall-Push Button (see page 160)

Analog actuating element

S12 Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 155)

S15B Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 148)

S16 Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 158)

Special model


X Special / customer specified




B33

Edition:


Push button installed Pos. 1,2,3






Edition:


Rocker switch installed Pos. 1+2






Edition:

Fingertip S15B installed Pos. 1+2





Technical details may vary based on configuration or application! Technical data subject to change without notice!







The Palm Grip B32 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm^2 , 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC 13 (*1 0,1A 24 V DC13)



		Example B32L	-2D	W	SE	S12	-)
Basic	unit						
B32L	Palm Grip left						
B32R	Palm Grip right						
Digita	e actuating element						
D	Push Button KDA21 *1						
	Colour: red, black, yellow, green, blue, white, orange						
HD	Hall-Push Button (see page 160)						
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, white Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	9					
SE	Sensor Button capacitive with external control electronics						
S	Sensor Button capacitive without external control electronics						
	(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with inte	rfaces E3x	x + E4xx +	- E6xx)			
	+ E7xx + E907)						
Analog	g actuating element						
S12	Thumbwheel, output 0,52,54,5 V inverse dual (see page 155)						
S16	Thumbwheel, output 0,52,54,5 V inverse dual (see page 158)						
V21	Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144)						
НК	Hall-Cross Switch (see page 152)						

Special model


Special / customer specified


Palm Grip




B32


Push button installed Pos. 1 - 8, 11 - 13 Rocker switch installed Pos.9

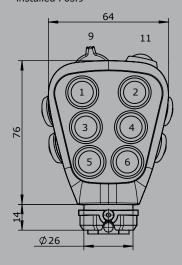

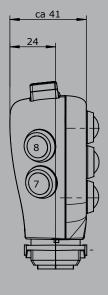





Push button installed Pos. 1 - 8, 12 + 13 Rocker switch lengthwise installed Pos. 10




Rocker switch crosswise installed Pos. 10




Edition: Multi-axis controller V21 installed Pos. 1/3 (Pos. 9 - 11 not available)















The Palm Grip B31 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long).

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67


Contact complement 1,5A 24 V DC13 (*1 0,1A 24 V DC13)



			Exam					
Basic unit		B31R	-2D	W	НК	S12	V21	
B31L Palm Grip left		-						
B31R Palm Grip right								
DOIN FAIIII GIIP IIGIIL								
Digital actuating element								
D Push Button KDA21	*1							
Colour: red, black, ye	ellow, green, blue, white, orange							
HD Hall-Push Button (se	e page 160)							
	entary (T) or maintained (R), colours: red, black s: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	k, yellow, blue	, white					
Wechanical function	5. 1-0-1, 0-1, 11-0-1, 11-0-11, 0-11, 11-11							
Analog actuating element								
S12 Thumbwheel, outpu	t 0,52,54,5 V inverse dual (see page 155)							
S16 Thumbwheel, outpu	t 0,52,54,5 V inverse dual (see page 158)							
V21 Mini-Joystick, output	: 0,52,54,5 V inverse dual (see page 144)							
HK Hall-Cross Switch (se	ee page 152)							
CAN								
Supply voltage	9-32 V DC	_	_	_	_	_		
Idle current consumption	80 mA (24 V DC)							
Current carrying capacity	External digital output for LEDs 5 mA - 30) mA (depend	ent on the r	number of I	_ED`s)			
Protocol	CANopen CiA DS 301, SAE J1939 (based	on) or CANo	oen Safety l	EN50325-5	5			
Baud rate	20 kBit/s to 1 Mbit/s (standard 250 kBit/s	s)						
CAN							E313 1	
- 5 analoge joystick axis								
- 24 digital joystick functions								
	uts						2	
Additional with 16 LED-outpo								
Additional with 16 LED-outpo								
Additional with 16 LED-outpo CANopen Safety							E412 1	
							E412 1	
CANopen Safety							E4121	

Palm Grip



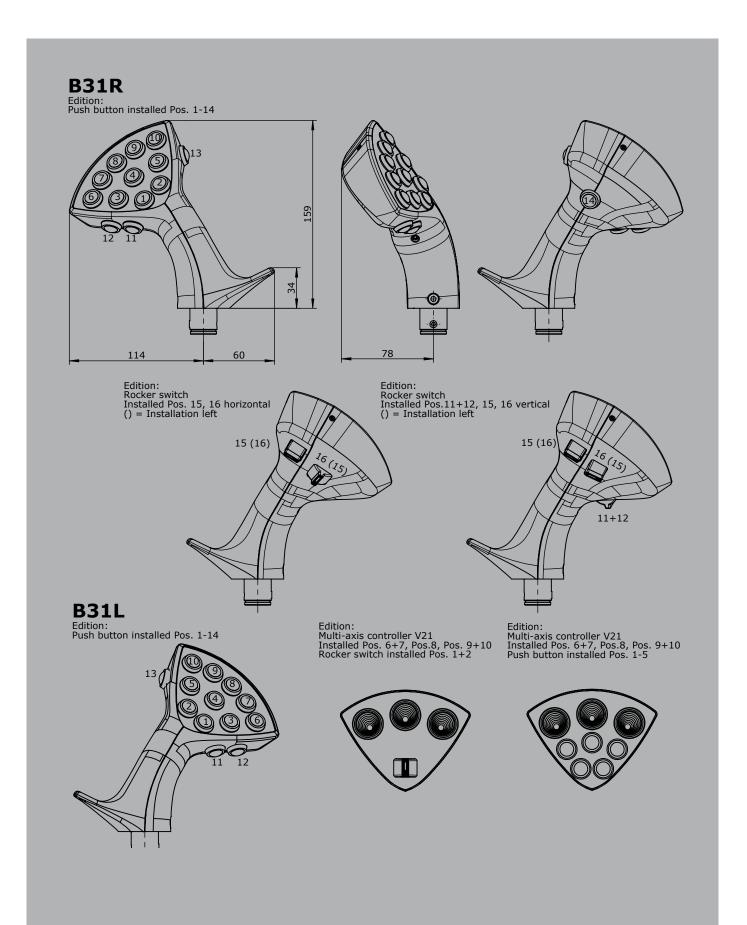







The Palm Grip B30 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm^2 , 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC 13 (*1 0,1A 24 V DC13)





				Example					
	1	B30	-2D	W	SR	SE	S12	H13	-X
Basic	unit								
B30	Palm Grip								
Digita	al actuating element								
D	Push Button KDA21 *1								
	Colour: red, black, yellow, green, blue, white, orange								
HD	Hall-Push Button (see page 160)								
W	Rocker switch momentary (T) or maintained (R), colours: red, black white Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	k, yellow, l	blue,						
SR	Sliding switch R-O-R								
ST	Sliding switch T-0-T								
SE	Sensor Button capacitive with external control electronics								
S	Sensor Button capacitive without external control electronics								
	(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and	V25/V27	with inte	erfaces E3x	x + E4xx +	E6xx)			
	+ E7xx + E907)								
Analo	g actuating element								
S12	Thumbwheel, output 0,52,54,5 V inverse dual (see page 155)								
S16	Thumbwheel, output 0,52,54,5 V inverse dual (see page 158)								
V21	Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144)								
НК	Hall-Cross Switch (see page 152)								
H13	Hall-Rotary Grip								
	Output 0,52,54,5 V inverse dual								
Speci	al model								
Χ	Special / customer specified								





B30


Push button installed Pos. 1 - 8 +11 Rocker switch installed Pos. 9+10

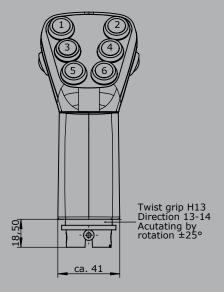

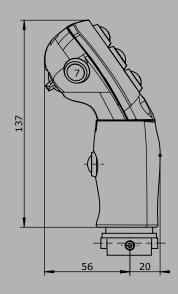

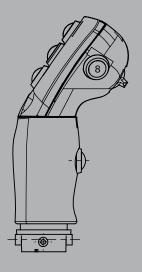

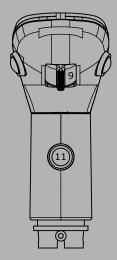

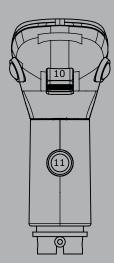





Edition: installed Pos. 3+1 Sliding switch installed Pos. 2+4 Rocker switch



Edition: installed Pos. 2+4 Multi-axis controller V21 installed Pos. 5+6 Rocker switch









The Palm Grip B29 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement 0,1A 24 V DC13



Basic unit

B29 Palm Grip

Digital actuating element

D Push Button KDA21

Colour: red, black, yellow, green, blue, white, orange

HD Hall-Push Button (see page 160)

SE Sensor Button capacitive with external control electronics

S Sensor Button capacitive without external control electronics

 $(Consistent\ with\ V85\ /\ VV85\ with\ interface\ E1xx\ to\ E7xx,\ E907\ and\ V25/V27\ with\ interfaces\ E3xx\ +\ E4xx\ +\ E6xx\ +\ E7xx$


+ E907)

Special model


X Special / customer specified









Edition: Push button installed Pos. 1-6




Edition: Sensor installed Pos. 6, Push button installed Pos. 3,4





Edition: Sensor installed Pos. 5, Push button installed Pos. 1,2









The Palm Grip B28 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 $\rm mm^2$, 450 $\rm mm$ long). The mounting piece for the drive rod can be supplied with a tapped hole 10 $\rm mm$ (standard).

Technical data

Operating temperature -40°C to +85°C
Degree of protection Up to IP54


Special / customer specified





		E			
		B28	-2D	SE	-X
Basic	unit				
B28	Palm Grip				
Digit	al actuating element				
D	Push Button (1,5A 24 V DC13)				
	Colour: red, black, yellow, green, blue, grey				
SE	Sensor Button capacitive with external control electronics				
S	Sensor Button capacitive without external control electronics				
	(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V2	25/V27 with interfac	ces E3xx + E4xx + E6	5xx + E7xx + E907)	
Spec	ial model				




Edition: Push button installed Pos. 1,3,4,6,7,8 Sensor button function on left or right available

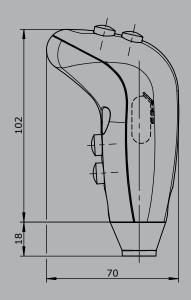

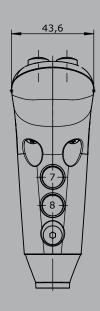




Edition: Push button installed Pos. 2,5,7,8 Sensor button function on left or right available



Edition:
Push button installed
Pos. 7,8,9,10
Sensor button function on left or right available









The Palm Grip B26 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm^2 , 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C


Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC 13 (*1 0,1A 24 V DC13)




			Exa	mple					
		B26L	-2D	HD	W	S12	V21	H13	->
Basic	unit								
B26L	Palm Grip left								
B26R	Palm Grip right								
Digita	actuating element								
D	Push Button KDA21 *1								
	Colour: red, black, yellow, green, blue, white, orange								
HD	Hall-Push Button (see page 160)								
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	ow, blue,	white						
SR	Sliding switch R-O-R								
ST	Sliding Button T-O-T								
SE	Sensor Button capacitive with external control electronics								
S	Sensor Button capacitive without external control electronics								
	(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/	V27 with	interface	s E3xx + E	4xx + E6	XX			
	+ E7xx + E907)								
V	Vibration								
Analo	g actuating element								
S12	Thumbwheel, output 0,52,54,5 V inverse dual (see page 155)								
S16	Thumbwheel, output 0,52,54,5 V inverse dual (see page 158)								
V21	Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144)								
НК	Hall-Cross Switch (see page 152)								
H13	Hall-Rotary Grip								
	Output 0,52,54,5 V inverse dual								
Sneet	al model								
Specia X	al model								
	Special / customer specified								




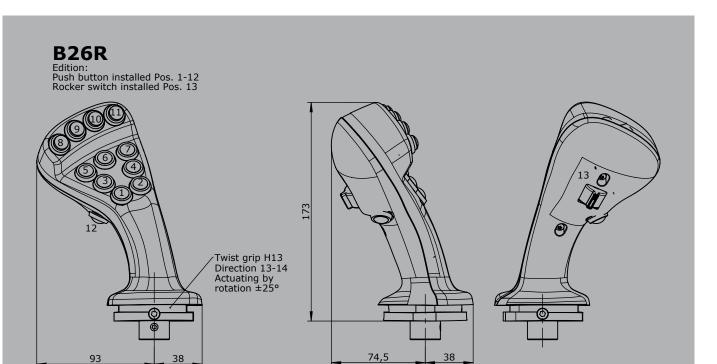


B26L

Edition: Push button installed Pos. 1-12 Rocker switch installed Pos. 13

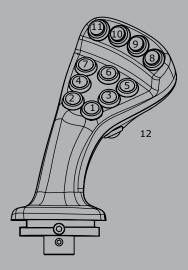

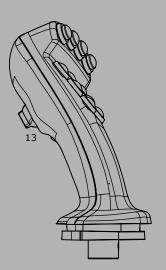

Edition: Push button installed Pos. 1+2, 8-12 Rocker switch installed Pos. 3+5, 4+7

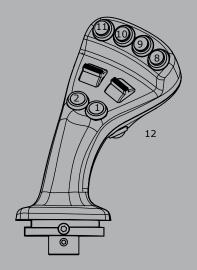





The Palm Grip B25 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm^2 , 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC 13 (*1 0,1A 24 V DC13)



	_B2	5L	Example -2D	w	К	SE	V21	H13)
Basic									
B25L	Palm Grip left								
B25R	Palm Grip right								
Digital	l actuating element								
D	Push Button KDA21 *1								
	Colour: red, black, yellow, green, blue, white, orange								
HD	Hall-Push Button (see page 160)								
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, w Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	hite	•						
К	Lever switch								
SR	Sliding switch R-O-R								
ST	Sliding switch T-0-T								
SE	Sensor Button capacitive with external control electronics								
S	Sensor Button capacitive without external control electronics								
	(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with in	nter	faces E3x	x + E4x	x + E6xx	+ E7xx			
	+ E907)								
V	Vibration								
Analog	g actuating element								
S12	Thumbwheel, output 0,52,54,5 V inverse dual (see page 155)								
S16	Thumbwheel, output 0,52,54,5 V inverse dual (see page 158)								
V21	Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144)								
НК	Hall-Cross Switch (see page 152)								
H13	Hall-Rotary Grip, Output 0,52,54,5 V inverse dual								






CAN									
Supply voltage	9-32 V DC								
Idle current consumption	80 mA (24 V DC)								
Current carrying capacity	External digit	al output for LEI	Os 5 mA - 30 mA (dependent on the number of LEDs)						
Protocol	CANopen CiA	A DS 301, SAE J	1939 (based on) or CANopen Safety EN50325-5						
Baud rate	20 kBit/s to 1 Mbit/s (standard 250 kBit/s)								
CAN		E313 1	CANopen Safety	E412 1					
- 5 analoge joystick axis			- 5 analog joystick axis						
- 5 analoge joystick axis- 24 digital joystick functions			- 5 analog joystick axis - 24 digital joystick functions						

Special model

Special / customer specified



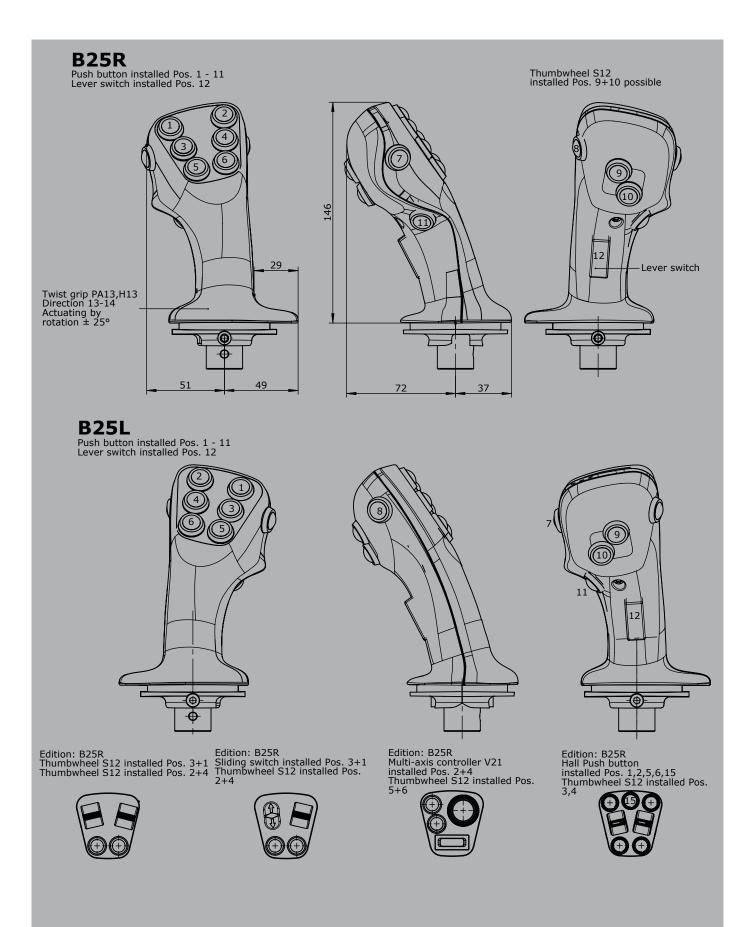







The Palm Grip B24 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The superior grip surface is framed by an illuminated coloured ring element. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67


Contact complement 1,5A 24 V DC13 (*1 0,1A 24 V DC13)




Example -IWH -D B24 2W V21 -X **Basic unit** B24 Palm Grip Digital actuating element D Push Button KDA21 *Б Colour: red, black, yellow, green, blue, white, orange W Rocker switch T-0-T W Rocker switch 0-T W Rocker switch R-0-T W Rocker switch R-0-R W Rocker switch 0-R W Rocker switch R-R SE Sensor Button capacitive with external control electronics S Sensor Button capacitive without external control electronics (Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with interfaces E3xx + E4xx + E6xx + E7xx + E907) **Analog actuating element** V21 Mini-Joystick, output 0,5...2,5...4,5 V inverse dual (see page 144) H13 Hall-Rotary Grip Output 0,5...2,5...4,5 V inverse dual **Additional option** IWH Colour ring white, illuminated IRD Colour ring red, illuminated **IBL** Colour ring blue, illuminated WH Colour ring white RD Colour ring red BL Colour ring blue GN Colour ring green YΕ Colour ring yellow Special model

Special / customer specified



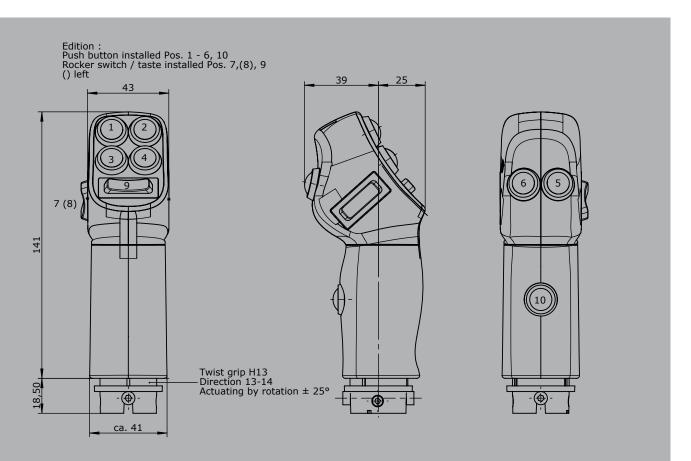

Edition:
Push button installed Pos. 5,6,10
Rocker switch / taste Pos. 7,(8), 9
multi-axis controller V21 Pos. 11
() left

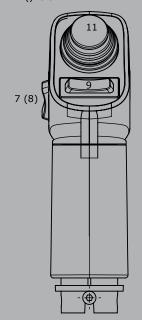







The Palm Grip B23 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C


Degree of protection Control element up to IP67


Contact complement 1,5A 24 V DC13 (*1 0,1A 24 V DC13)





			Examp	le		
		B23R	-2D	W	V21	-X
Basic	unit					
B23L	Palm Grip left					
B23R	Palm Grip right					
Digita	l actuating element					
D	Push Button KDA21 *1					
	Colour: red, black, yellow, green, blue, white, orange					
HD	Hall-Push Button (see page 160)					
W	Rocker switch momentary (T) or maintained (R), colours: Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	red, black, yellow,	blue, white			
Analog	g actuating element					
S12	Thumbwheel, output 0,52,54,5 V inverse dual (see pa	ge 155)				
S16	Thumbwheel, output 0,52,54,5 V inverse dual (see pa	ge 158)				
V21	Mini-Joystick, output 0,52,54,5 V inverse dual (see page	ge 144)				
НК	Hall-Cross Switch (see page 152)					
Specia	al model					
X	Special / customer specified					



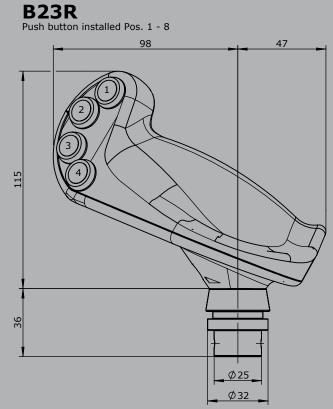

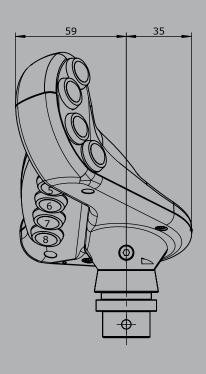

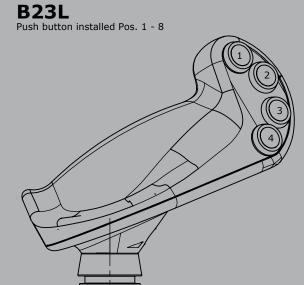

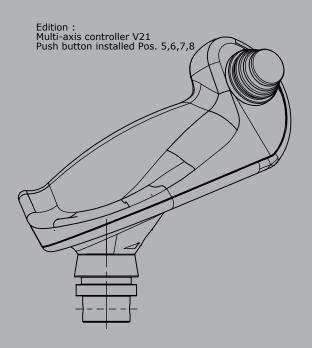

Technical details may vary based on configuration or application! Technical data subject to change without notice!







The Palm Grip B22 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 7 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC13 (*1 0,1A 24 V DC13)





		B22AL	Example - 4D	W	-X
Basic u	nit				
B22L	Palm Grip left				
B22R	Palm Grip right				
B22AL	Palm Grip left with support				
B22AR	Palm Grip right with support				
Digital a	actuating element				
D	Push Button KDA21 *1				
	Colour: red, black, yellow, green, blue, white, orange				
HD	Hall-Push Button (see page 160)				
W*	Rocker switch T-0-T				
W*	Rocker switch 0-T				
W*	Rocker switch R-0-T				
W*	Rocker switch R-0-R				
W*	Rocker switch 0-R				
W*	Rocker switch R-R				
	*Only possible with version with support!				
SE	Sensor Button capacitive with external control electronic	s			
S	Sensor Button capacitive without external control electro	nics			
	(Consistent with V85 / VV85 with interface E1xx to E7xx,	E907 and V25/V27 w	vith interfaces E3xx + E	4xx + E6xx + E7xx	
	+ E907)				
Special	model				
X	Special / customer specified				




B22


Edition:
Push button installed Pos. 1,2,3,4
Position push button left hand ()

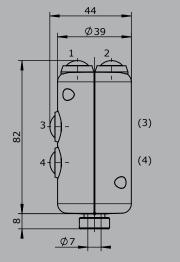




Edition: Push button installed Pos. 3,4,10 Position push button left hand ()







B22A

Editon: Push button installed Pos. 3,4,5,6,7,8 Position push button left hand ()

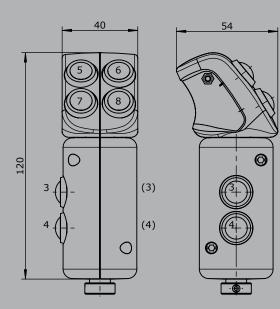

Edition: Push button installed Pos. 3,4,5,6,9 Rocker switch installed Pos. 7-8 Position push button left hand ()

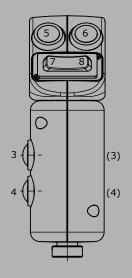

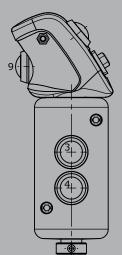







The Palm Grip B20 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC13 (*1 0,1A 24 V DC13)




asic ι	ınit						
320L	Palm Grip left with hand pad						
320R	Palm Grip right with hand pad						
	actuating element	_					
)	Push Button KDA21 *1						
	Colour: red, black, yellow, green, blue, white, orange						
HD	Hall-Push Button (see page 160)						
N	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	blue, whit	ce				
(Lever switch						
Ε	Sensor Button capacitive with external control electronics						
5	Sensor Button capacitive without external control electronics						
	(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V2	7 with inte	erfaces E3x	x + E4xx +	- E6xx		
	+ E7xx + E907)						
Analog	actuating element						
512	Thumbwheel, output 0,52,54,5 V inverse dual (see page 155)						
316	Thumbwheel, output 0,52,54,5 V inverse dual (see page 158)						
/21	Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144)						
ΗК	Hall-Cross Switch (see page 152)						
9	Thumbwheel with potentiometer						
113	Hall-Rotary Grip						
	Output 0,52,54,5 V inverse dual						

Attach	iments	
Z01	Bellow KMD 109	10300009
Z02	Bellow KMD 190	10300093
Z03	Rosette KBF 905 with 4 screws M5 x 15 necessary for bellow KMD 190	5209900404

Special / customer specified



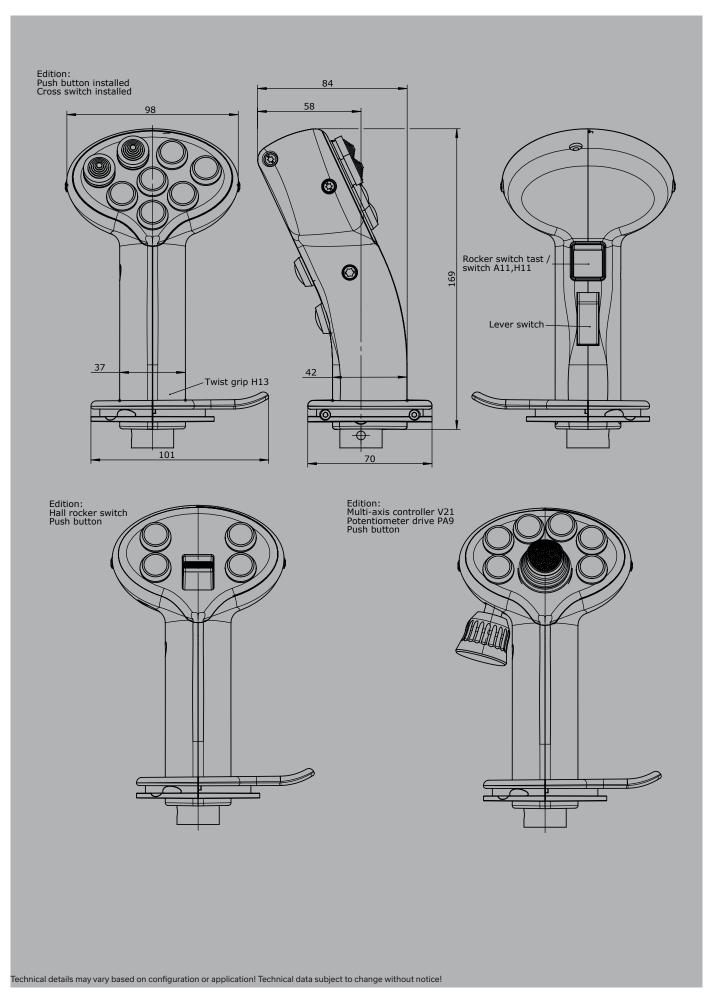







The Palm Grip B14/B15 has different equipment options for many requirements. It is compatible with our Multi-axis and Single-axis controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operation temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement 0,1A 24 V DC13



Example

B14 -2D -X

Basic unit

B14 Palm Grip left

B15 Palm Grip right

Digital actuating element

D Push Button KDA21 (0,1A 24 V DC13)


Colour: red, black, yellow, green, blue, white, orange

Special model


X Special / customer specified

Palm Grip B14/B15

B14Push button installed Pos. 1,2

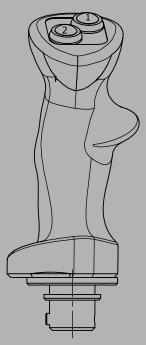

B15Push button installed Pos. 1,2

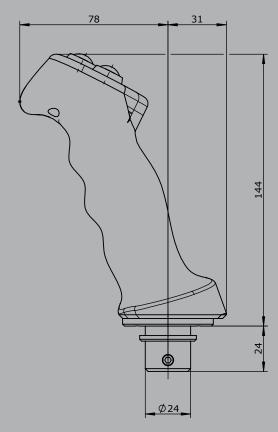









The Palm Grip B10 has different equipment options for many requirements. It is compatible with our Double-handle controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 10 mm.


Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67


Contact complement 1,5A 24 V DC13 (*1 0,1A 24 V DC13)




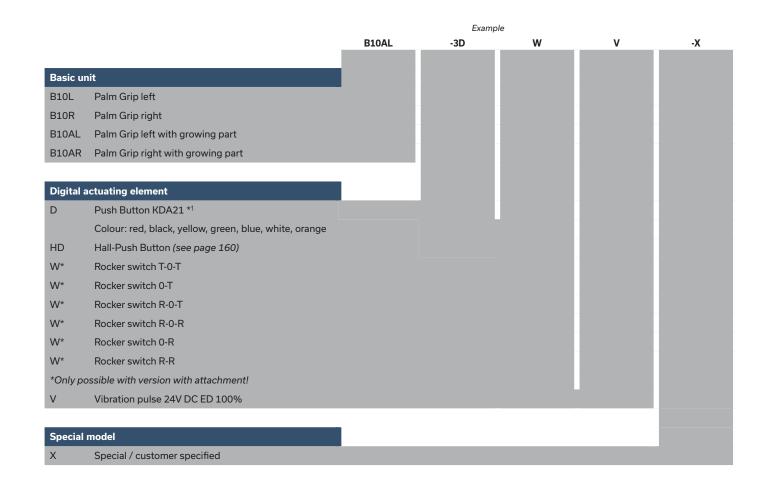




B10

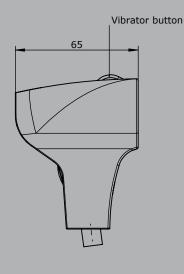


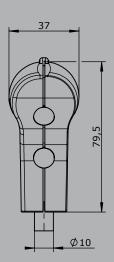

B10AEdition installed left:
Push button installed Pos. 1,2,3
Rocker switch



Edition installed right: Push button installed Pos. 4,5,6 Rocker switch









The Palm Grip B9 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire $(0.1 \text{ mm}^2, 450 \text{ mm} \text{ long})$. The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection IP54

Contact complement 1,5A 24 V DC13




				Example				
		DO.	20		A12	DA 11	DA42	
		B9	-2D	KT	A13	PA11	PA13	
Basic	unit							
39	Palm Grip							
Digita	l actuating element							
)	Push Button							
	Colour: red, black, yellow, green, blue, white							
(T	Cross switch T-0-T / T-0-T							
(R	Cross switch R-0-R / R-0-R							
A11	Rocker switch T-0-T Pos. 11 + 12							
A11	Rocker switch R-0-R Pos. 11 + 12							
	Datamy Crin T.O.T							
A13	Rotary Grip T-0-T							
Analo	g actuating element	1)						
Analo /21	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144	1)	I	Ξ				
Analo	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144 Rocker analog Pos. 11 + 12	1)						
Analo /21 PA11	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144 Rocker analog Pos. 11 + 12 Potentiometer T394 2 x 5 kOhm with direction contacts	1)	i	i				
Analo /21	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144 Rocker analog Pos. 11 + 12 Potentiometer T394 2 x 5 kOhm with direction contacts Rocker analog Pos. 11 + 12	1)	i	i				
Analo /21 PA11	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144 Rocker analog Pos. 11 + 12 Potentiometer T394 2 x 5 kOhm with direction contacts Rocker analog Pos. 11 + 12 Hall-Potentiometer	1)						
Analo /21 PA11	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144 Rocker analog Pos. 11 + 12 Potentiometer T394 2 x 5 kOhm with direction contacts Rocker analog Pos. 11 + 12 Hall-Potentiometer Output 0,52,54,5 V inverse dual	1						
Analo /21 PA11 H11	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144 Rocker analog Pos. 11 + 12 Potentiometer T394 2 x 5 kOhm with direction contacts Rocker analog Pos. 11 + 12 Hall-Potentiometer Output 0,52,54,5 V inverse dual	1)						
Analo /21 PA11 H11	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144) Rocker analog Pos. 11 + 12 Potentiometer T394 2 x 5 kOhm with direction contacts Rocker analog Pos. 11 + 12 Hall-Potentiometer Output 0,52,54,5 V inverse dual Rotary Grip	1						
Analo /21 PA11 H11	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144 Rocker analog Pos. 11 + 12 Potentiometer T394 2 x 5 kOhm with direction contacts Rocker analog Pos. 11 + 12 Hall-Potentiometer Output 0,52,54,5 V inverse dual Rotary Grip Potentiometer T375 2 x 5 kOhm with direction contacts	1)						
Analo /21 PA11 H11	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144) Rocker analog Pos. 11 + 12 Potentiometer T394 2 x 5 kOhm with direction contacts Rocker analog Pos. 11 + 12 Hall-Potentiometer Output 0,52,54,5 V inverse dual Rotary Grip Potentiometer T375 2 x 5 kOhm with direction contacts Hall-Rotary Grip	1						
Analo /21 /21 H11 PA13	g actuating element Mini-Joystick, output 0,52,54,5 V inverse dual (see page 144) Rocker analog Pos. 11 + 12 Potentiometer T394 2 x 5 kOhm with direction contacts Rocker analog Pos. 11 + 12 Hall-Potentiometer Output 0,52,54,5 V inverse dual Rotary Grip Potentiometer T375 2 x 5 kOhm with direction contacts Hall-Rotary Grip	1						


Attac	hme	nts
, teed		

Z01	Bellow KMD 109	10300009
Z02	Bellow KMD 190	10300093
Z03	Rosette KBF 905 with 4 screws M5x15 necessary for bellow KMD 190	5209900404



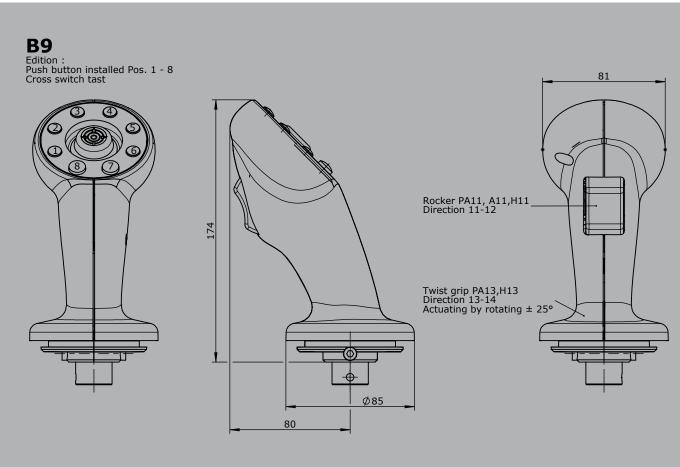



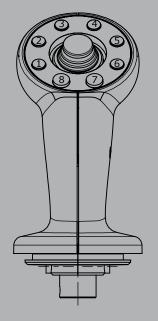







The Palm Grip B7 / B8 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire $(0,1~\text{mm}^2,450~\text{mm}\,\text{long})$. The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to +85°C

Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC13 (*1 0,1A 24 V DC13)



B7	-2D	W	К	SE	S9	PA13	-)

в	as	ıc	un	П

B7 Palm Grip left

B8 Palm Grip right

Digital actuating element

D Push Button

Colour: red, black, yellow, green, white, orange

D Push Button KDA21 *1

Colour: red, black, yellow, green, blue, white, orange

HD Hall-Push Button (see page 160)

Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue,

W white

Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R

K Lever switch

A13 Rotary Grip T-0-T

SE Sensor Button capacitive with external control electronics

S Sensor Button capacitive without external control electronics

 $(Consistent\ with\ V85\ /\ VV85\ with\ interface\ E1xx\ to\ E7xx,\ E907\ and\ V25/V27\ with\ interfaces\ E3xx\ +\ E4xx\ +\ E6xx$

+ E7xx + E907)

V Vibrator

Impulse 24 V DC ED 100%

Analog actuating element

S12 Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 155)

S16 Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 158)

V21 Mini-Joystick, output 0,5...2,5...4,5 V inverse dual (see page 144)

HK Hall-Cross Switch (see page 152)

PA13 Rotary Grip

Potentiometer T375 2 x 5 kOhm with direction contacts

H13 Hall-Rotary Grip

Output 0,5...2,5...4,5 V inverse dual

Special model

X Special / customer specified

Att	ac	hm	eni	Š
			911	


 Z01
 Bellow KMD 109
 10300009

 Z02
 Bellow KMD 190
 10300093

Z03 Rosette KBF 905 with 4 screws M5x15 necessary for bellow KMD 190 5209900404

Technical details may vary based on configuration or application! Technical data subject to change without notice!



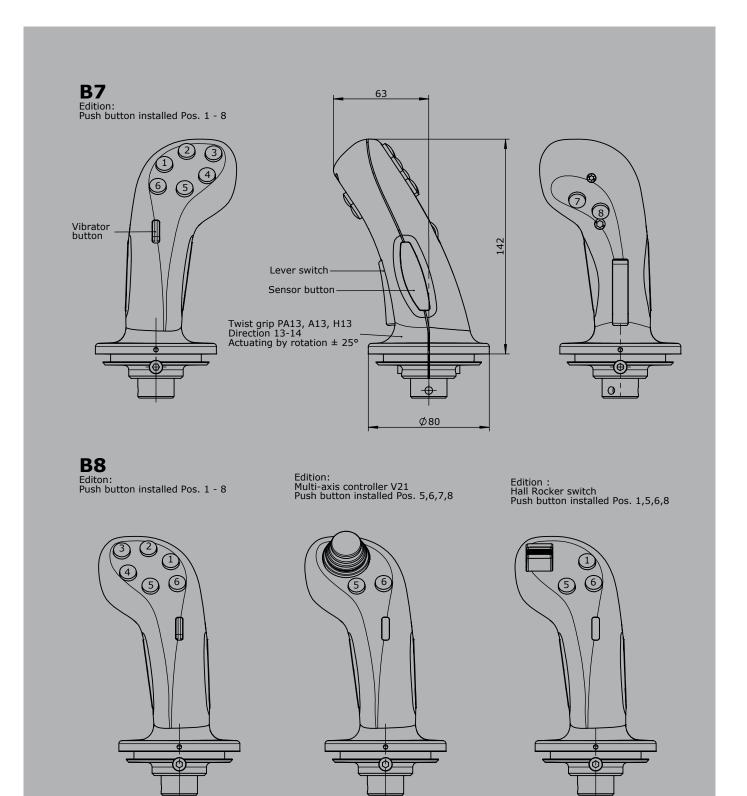

V2023/2 17.03.2025







The Palm Grip B6 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible cable (4 respectively 8 x 0,25 mm², 450 mm long). The mounting piece can be supplied with a tapped hole M10 (standard) or M8.

Technical data

Operating temperature -40°C to +85°C

Degree of protection IP54


Contact complement 1,5A 24 V DC13




			Example	
		В6	-D	К
Bas	ic unit			
B6	Palm Grip			
Dig	ital actuating element			
D	Push Button top			
W	Rocker switch top T-0-T			
W	Rocker switch top R-0-T			
W	Rocker switch top R-0-R			
К*	Lever switch			
	* Included with the delivery of Palm Grip B6!			
Spe	cial model			
Χ	Special / customer specified			



B6Edition:
Lever switch side
Rocker switch installed top

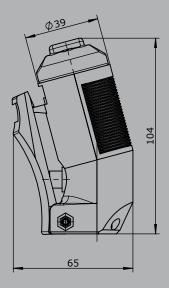

Edition: Lever switch side Push button top



Technical details may vary based on configuration or application! Technical data subject to change without notice!







The Palm Grip B5 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (4 respectively $8 \times 0.25 \text{ mm}^2$, 450 mm long). The mounting piece can be supplied with a tapped hole M10 (standard) or M8.

Technical data

Operating temperature -40°C to +85°C

Degree of protection IP54


Contact complement 3A 24 V DC13 (*1 1,5A 24 V DC13)




Example **B**5 -D w -X Basic unit B5 Palm Grip Digital actuating element Push Button top D Push Button side *5 W Rocker switch top T-0-T W Rocker switch top R-0-T W Rocker switch top R-0-R Push Button top mechanical operation (Only possible in combination with Multi-Axis Controller or single-axis controller!) Special model Special / customer specified





Edition: Push button installed Pos. 1,2







Edition: Rocker switch installed Pos. 3 Push button installed Pos. 2





Edition: Push button installed Pos. 2,3









The Palm Grip B3 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire $(0,1~\text{mm}^2,450~\text{mm} \,\text{long})$. The mounting piece can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature -40°C to $+85^{\circ}\text{C}$

Degree of protection Control element up to IP67

Contact complement 1,5A 24 V DC 13 (*1 0,1A 24 V DC13)



		B3	-2D	W	K	SE	PA11	PA13	-X
Basic	unit								
B3	Palm Grip								
D3	i aiii aiip								
Digita	l actuating element								
D	Push Button								
	Colour: red, black, yellow, green, blue, grey								
D	Push Button KDA21 *1								
	Colour: red, black, yellow, green, blue, white, orange								
W	Rocker switch T-0-T								
W	Rocker switch 0-T								
W	Rocker switch R-0-T								
W	Rocker switch R-0-R								
W	Rocker switch 0-R								
W	Rocker switch R-R								
К	Lever switch								
SR	Sliding switch								
ST	Sliding switch								
ZD	Push Button with 2 steps								
A12	Push Button Pos. 11-12								
A11	Thumbwheel T-0-T								
A11	Thumbwheel R-0-R								
	L left, R right								
A13	Rotary Grip T-0-T								
SE	Sensor Button capacitive								
S	Sensor Button capacitive without external control electronics								
	(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and	d V25/V2	?7 with int	erfaces E3	xx + E4xx	+ E6xx			
	+ E7xx + E907)								
	Vibration								






		B3L	-2D	W	К	SE	PA11R	PA13	-X
Analan	and a first and a second								
	actuating element	_	_	_	_	_			
PA11	Thumbwheel								
	Potentiometer T375 2 x 5 kOhm with direction contacts								
H11	Thumbwheel								
	Hall-Potentiometer								
	Output 0,52,54,5 V inverse dual								
	L left, R right								
PA12	Push Button analog Pos. 11+12								
	Potentiometer T375 2 x 5 kOhm with direction contacts								
H12	Push Button analog Pos. 11+12								
	Hall-Potentiometer								
	Output 0,52,54,5 V inverse dual								
PA13	Rotary handle								
	Potentiometer T375 2 x 5 kOhm with direction contacts								
H13	Hall-Rotary handle								
	Output 0,52,54,5 V inverse dual								
Special	model								
Χ	Special / customer specified								

Attach	Attachments							
Z01	Bellow KMD 109	10300009						
Z02	Bellow KMD 190	10300093						
Z03	Rosette KBF 905 with 4 screws M5 x 15 necessary for bellow KMD 190	520990004						



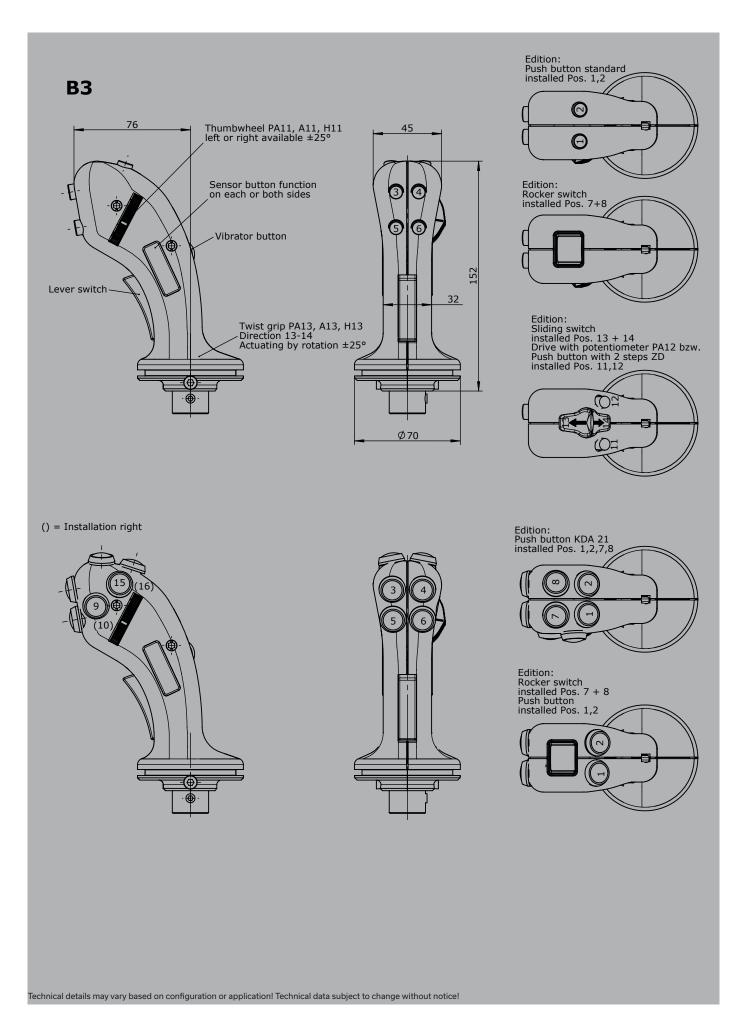







The Palm Grip B2 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible cable (8 x 0,25 mm 2 , 450 mm long). He can be tilted in any direction by 20 degrees and can lock in this position. The mounting piece can be supplied with a tapped hole M10 (standard) or M8.

Technical data

Operating temperature -40°C to +85°C

Degree of protection IP54


Contact complement 1,5A 24 V DC13 (*1 0,1A 24 V DC13)





Example B2 PA15 -2D -X Basic unit B2 Palm Grip Digital actuating element D Push Button KDA/70 D Push Button KDA21 *1 Colour: red, black, yellow, green, blue, white, orange HD Hall-Push Button (see page 160) A15 2 push Button Pos. 1 + 2 interlocked **Analog actuating element** Push Button analog Pos. 1 + 2 2 potentiometer T301 2 x 5 kOhm with direction contacts Special model Special / customer specified




B2






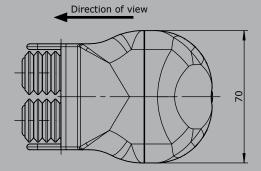

Edition: Push button KDA / 70 installed Pos. 1,2,3,4



Edition: Push button KDA 21 installed 1,2,3,4









The Palm Grip B1 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible cable (4 respectively 8 x 0,25 mm², 450 mm long). The mounting piece can be supplied with a tapped hole M10 (standard) or M8.

Technical data

Operating temperature -40°C to +85°C

Degree of protection IP54

Contact complement 3A 24 V DC13 (*1 1,5A 24 V DC13)




			Example		
		B1	-2D	W	-X
Bas	ic unit				
B1	Palm Grip				
		ı			
Dig	ital actuating element				
D	Push Button top				
D	Push Button side *1				
W	Rocker switch top T-0-T				
W	Rocker switch top R-0-T				
W	Rocker switch top R-0-R				
Т	Push Button top with mechanical operation				
	(Only possible with Multi-Axis Controller or Sngle-Axis controller!)				
К	Lever switch				
КТ	Lever switch mechanical operation				
	(Only possible with Multi-Axis Controller or Single-Axis controller!)				
Spe	ecial model				
Х	Special / customer specified				


Palm Grip



Edition:
Push button installed Pos. 1,2,3,4

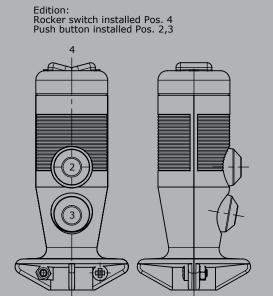

Edition: Lever switch installed side

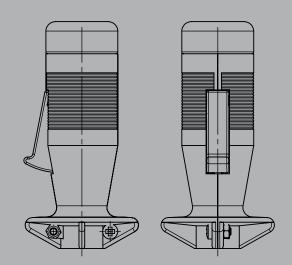

Control Console



We designed the Control Console C1 to give our customers the maximum freedom of design and conguration options. The design has paid attention to a compact format, which can be extended with additional modules. The modular design allows individual assembly with joysticks, displays and command devices. The Control Console C1 is thus able to adapt perfectly to your product and your branding.

Standard colour:

Housing upper part: light grey RAL 7035 and anthracite RAL 7016 Housing bottom part: anthracite RAL 7016

Insert plate: anthracite RAL 7016

Technical data:

Operation temperature -40°C to $+85^{\circ}\text{C}$ Horizontal adjustment +/-30 mm



Example -0 **USB** C1 -1 -1 -1 -L1 **V27** KLS X Basic unit Control Console 160 x 520 mm Insert plate 1 Insert plate (flat) variant 1 Insert plate (with recess) variant 2 Colour housing upper part 1 Light grey RAL 7035 2 Anthracite RAL 7016 Desired colour (on request!) Colour decor stripes 1 Red RAL 3020 Green RAL 6024 2 Blue RAL 5017 3 4 Yellow RAL 1004 Desired colour (on request!) Illumination decor stripes 0 No illumination 1 RGB-illumination left 2 RGB-illumination right 3 RGB-illumination left + right **Attachements** USB-plugin socket 2-fold, 2 x 2,5 A **USB** L1 Logo left L2 Logo right L3 Logo left incl. lighting

Technical details may vary based on configuration or application! Technical data subject to change without notice!

L4

E1

D1

Logo right incl. lighting

Extension housing right

Display holder (Display on page 216)


Control Console



Mounting for equipment boxes V Multi-Axis Controller (see page 1) N... Control-Switch (see page 120) ... More command and indicating devices (see page 144 and 289) Wiring KLS On connector or joystick per core KLK One side on cable per core Special model X Special / customer specified

Control Console



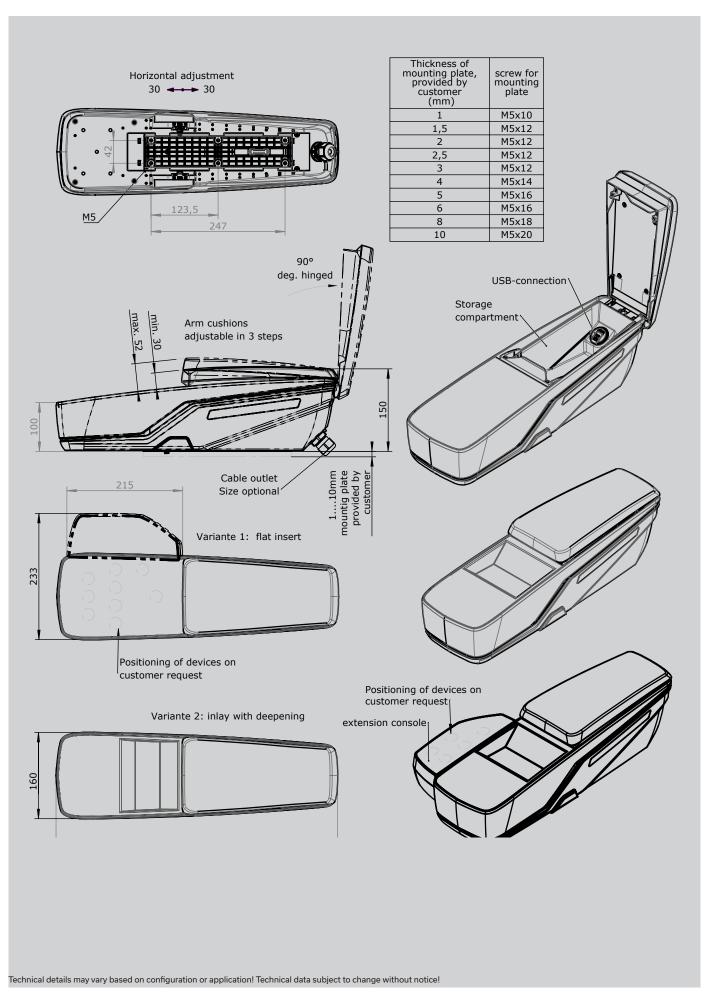

Touch Display



The Touch Display TD1 was developed for the rough use in working machines. It is available in 7" and 10.1" versions. It can be easily integrated into the machine via the CAN bus interface. Due to the wide reading angle and the strong brightness, optimal readability is guaranteed even in difficult lighting conditions.





Example

Basic unit

TD 1-7 Touch Display 7" 1024 x 600 pixel

TD 1-10 Touch Display 10,1" 1280 x 800 pixel

Technical information

Viewing angle +/-85°

Color depth 24 bit

Contrast ratio 1000:1

Brightness type 850cd/sqm

Brightness dimmable in 16 steps

Capacitive touch panel

4-core CPU ARM A35 1.2GHz, 2GB RAM

CAN bus interface

eMMC 8GB internal

Integrated horn, external headset stereo output (for car speakers with amplifier)

USB B 2.0 Highspeed, 1500mA max. charging current

Wireless data transfer Bluetooth 4.0 or Bluethooth 5.0

Light sensor

Supply voltage 7 to 32V DC

2 digital outputs max. current 2A

5 digital inputs and ignition input

Internal real time clock

Protection class IP68


Pre-installed Linux distribution with all necessary drivers


Professional user interface can be programmed with Qt Library (LGPL)


Touch Display




TD1-7







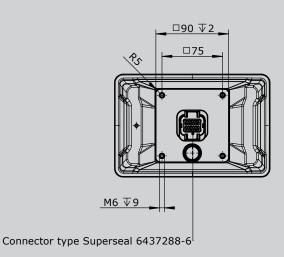

TD1-10

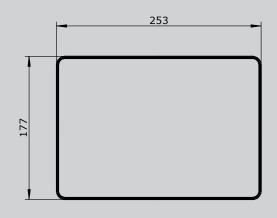



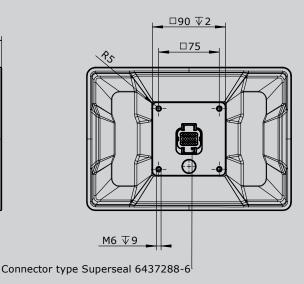

Technical details may vary based on configuration or application! Technical data subject to change without notice!





The Fingerpilot SP4 is an ergonomic CAN bus operating unit for controlling a wide range of applications such as hydraulic functions. The SP4 can be combined with our C1 control panel or used as a stand-alone device. The device has external inputs and outputs. This means that additional operating elements placed in the periphery can be integrated into the CAN system.

Technical data

Operation temperature -40°C to +85°C


Degree of protection Operating element up to IP67



		SP4	-HD	xample S12	4S15	E3181	-X
Rasio	c unit						
SP4	Fingerpilot						
Diait	al actuating element						
D	Push button KDA21 (0,1A 24VDC13) Colour: red, black, yellow, green, blue, white, orange						
HD	Hall-Push Button (see page 160)						
W	Rocker switch momentary (T) or maintained (R), colours: red, Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R	black, yellow,	blue, white				
Analo	og actuating element						
S12	Thumbwheel, output 0,52,54,5 V inverse dual (see page 2	L55)					
S15	Thumbwheel, output 0,52,54,5 V inverse dual (see page 2	L48)					
S16	Thumbwheel, output 0,52,54,5 V inverse dual (see page 2	L58)					
CAN		l					
Supp	ly voltage	9-32 V DC					
Idle c	current consumption	50 mA (24V D	OC)				
Proto	ocol	CANopen CiA EN50325-5	DS 301 or SA	E J1939 (base	d on or CANop	en Safety	
Baud	rate	20 KBit/s to 1	Mbit/s (stand	lard 250KBit/s)		
CAN						E3181	
	naloge joystick axis						
- 16 c	digital joystick functions						
With	additional external in-/outputs						
- 8 ex	ternal LED-outputs (dimmable optional), 1 switching output (po	otential-free, 1	00 mA), 8 exte	ernal digital inp	uts	2	
- 16 e	external LED-outputs (dimmable optional), 1 switching output (ootential-free,	100 mA), 16*	external digital	inputs	3	
(Cont	trol of integrated RGB LEDs possible on request)						
CAN	Safety					E418 1	
- 7 an	nalog joystick axis						
- 16 c	digital joystick functions						
With	additional external in-/outputs						
	ternal LED-outputs (dimmable optional), 1 switching output (po	otential-free, 1	00 mA), 8 exte	ernal digital inp	uts	2	
- 16 e	external LED-outputs (dimmable optional), 1 switching output (ootential-free,	100 mA), 16 e	xternal digital i	nputs	3	
(Cont	trol of integrated RGB LEDs possible on request)						
Spec	ial model	l				1	

Fingerpilot SP4



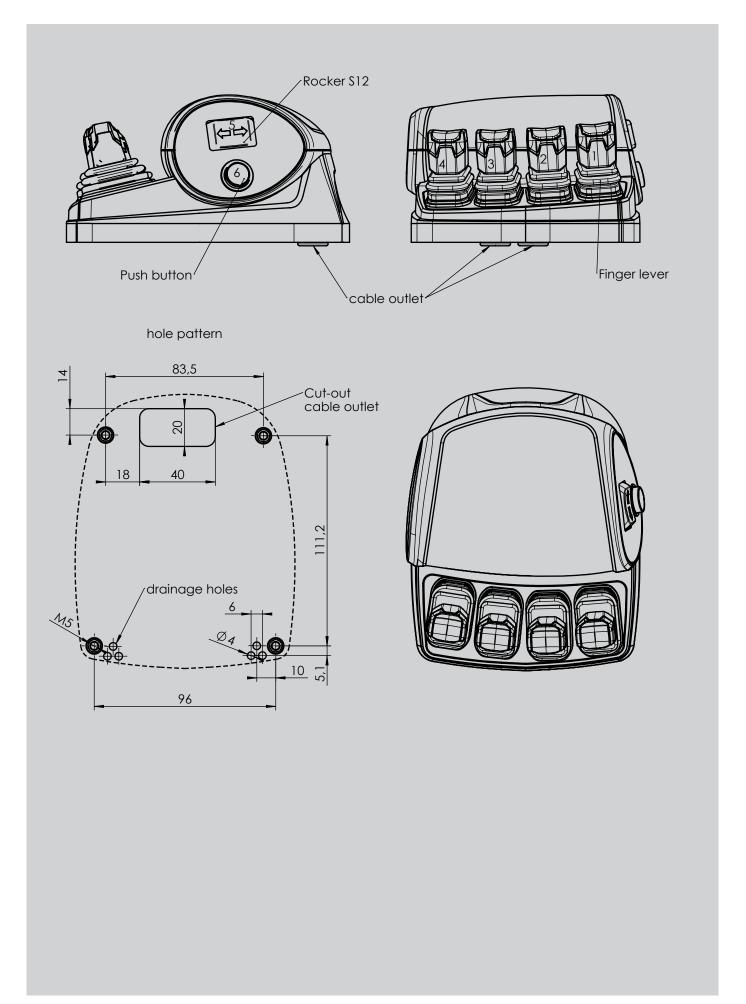



The Display Controller DC1 is a robust CAN bus operating unit for controlling HMI displays. The module is designed for rough applications. Due to the individual design and illumination of the symbols, it can be integrated into any operating concept.

Technical data

Operation temperature -40°C to +85°C

Degree of protection IP67

Functions


Joystick function4 digital functionsRotary function20 detent pointsPush button function2 push buttons



				Example		
		DC1	-1	-S3315	-S0924	-E3151
Basic	: unit					
DC1	Display Controller					
Illum	ination					
1	RGB illuminated ring					
Symb	bol push button left					
0	Without symbol					
1	F1					
2	F2					
S	Symbol according to ISO 7000 (example: S0244	- acoustic signal, horn / ISO	7000 symb	ol 0244)		
X	Custom-made					
Symb	bol push button right					
0	Without symbol					
1	F1					
2	F2					
S	Symbol according to ISO 7000 (example: S0244	- acoustic signal, horn / ISO	7000 symb	ol 0244)		
X	Custom-made					
CAN						
Supp	oly voltage	9-32 V DC				
ldle c	current consumption	50 mA (24V D	C, excl. illum	nination)		
Proto	ocol	CANopen CiA	DS 301 or S	SAE J1939 (base	d on)	
Baud	Irate	20 KBit/s til 1	Mbit/s (stan	dard 250KBit/s)		
Wirin	ng	CAN cable 30	0 mm with p	lug DTM04-6P		
CAN						E3151
CAN	open Safety					
Supp	ly voltage	9-32 V DC				
ldle c	current consumption	50 mA (24V D	C, excl. illum	nination)		
Proto	ocol	CANopen Safe	ety EN50325	5-5		
Baud	Irate	20 KBit/s til 1	Mbit/s (stan	dard 250KBit/s)		
Wirin	ng	CAN cable 30	0 mm with p	lug DTM04-6P		
CAN	open Safety					E4141
Snec	ial model					
Spec	iniouei					

Special / customer specified



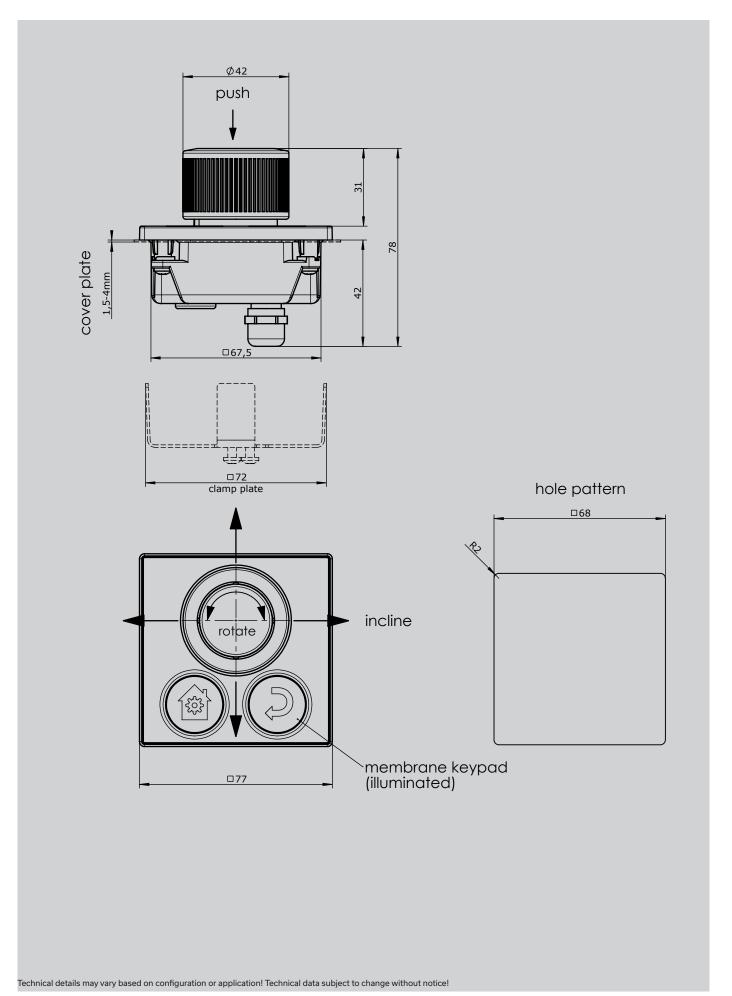



The Display Controller DC2 is a CAN bus operating unit for controlling HMI displays. The module also has 4 pushbuttons. Thanks to the individual design and illumination of the symbols, it can be integrated into any operating concept. With RGB illumination of the push-buttons, 16 lighting scenarios can be preset.

Technical data

Operation temperature -40°C to +85°C

Degree of protection

Elektronic IP67
Mechanic IP4X

Functions

Joystick function 4 digital functions
Rotary function 20 detent points

Push button function 6 push buttons with RGB illumination



Push button function 6 push buttons with		sh buttons with	RGB ill	lumir	natior	1							
							Example						
			DC2	-2	-1	-S3315	-S0924	-S0082	-S0083	· ·	E317	-S	-X
Basic	: unit												
DC1	Display Controller												
Duch	hoddan onelanda		-										
Pusn	-button variants												
1	Push-buttons with insert symbols												
2	Push-buttons with predefined symbols												
Mour	nting position / symbol arrangement												
1	Controller position north												

- 2 Controller position south
- 3 Controller position west
- 4 Controller position east

Symbol push-buttons 1

- 0 Without symbol
- Symbol according to ISO 7000 (example: S0244 acoustic signal, horn / ISO 7000
- symbol 0244)
- X As required

Symbol push-buttons 2

- 0 Without symbol
- Symbol according to ISO 7000 (example: S0244 acoustic signal, horn / ISO 7000 symbol 0244)
- 0244)

Χ

X As required

Symbol push-buttons 3

- 0 Without symbol
- S Symbol according to ISO 7000 (example: S0244 acoustic signal, horn / ISO 7000 symbol 0244)
 - As required

Symbol push-buttons 4

- 0 Without symbol
- S Symbol according to ISO 7000 (example: S0244 acoustic signal, horn / ISO 7000 symbol 0244)
- X As required

Symbol push-buttons 5

- 0 Without symbol
- S Symbol according to ISO 7000 (example: S0244 acoustic signal, horn / ISO 7000 symbol 0244)
- X As required


Symbol push-buttons 6

- 0 Without symbo
- S Symbol according to ISO 7000 (example: S0244 acoustic signal, horn / ISO 7000 symbol 0244)
- X As required




	DC2 -2 -1 -S3315 -S0924 -S0082 -S0083	E317 -SX
CAN Interface		E317
Supply voltage	9-32 V DC	
Idle current consumption	50 mA (24V DC, excl. lighting)	
Protocol	CANopen CiA DS 301 or SAE J1939 (based on)	
Baud rate	20 KBit/s to 1 Mbit/s (standard 250KBit/s)	
Wiring	CAN cable 300 mm without plug	
CAN Safety Schnittstelle		E417
Supply voltage	9-32 V DC	
Idle current consumption	50 mA (24V DC, excl. lighting)	
Protocol	CANopen Safety EN50325-5 or J1939-76	
Baud rate	20 KBit/s to 1 Mbit/s (standard 250KBit/s)	
Wiring	CAN cable 300 mm without plug	
Plug		
S Standard plug (see page 129)		
Special model		
X Special / customer specified		



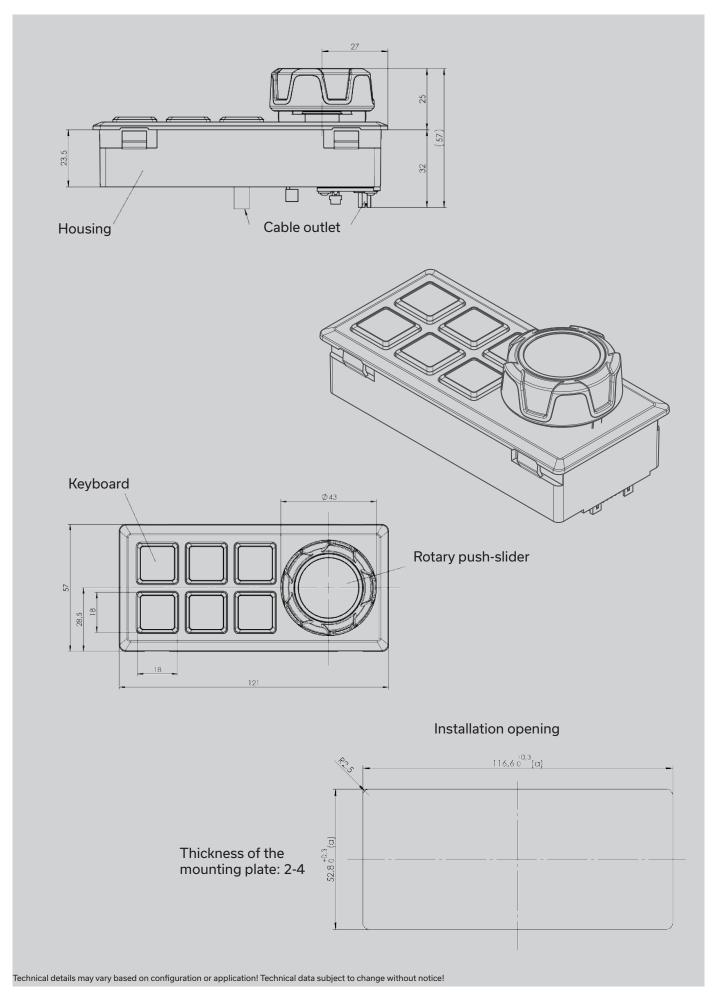





1 North

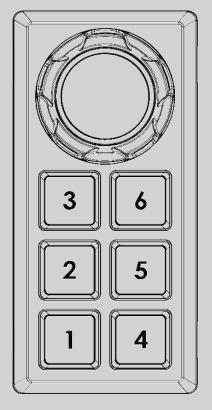


2 South

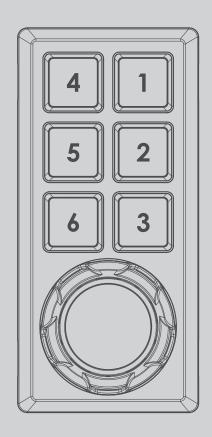

3 West

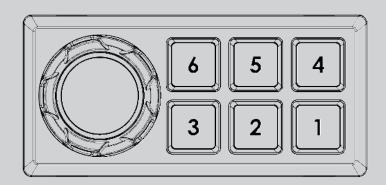

4 East

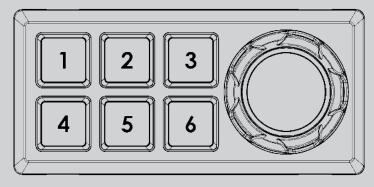





The TF keypad is a CAN bus operating unit with freely selectable push-button symbols. It is available in three versions: - TF1: Pushbuttons with insert symbols

- TF2: Pushbuttons with predefined symbols
- TF3: Pushbuttons with continuous front foil

The keypad is available in 2x3, 2x4, 2x5 and 4x5 sizes and can be integrated into our control panels or used individually for a wide range of applications. Each pushbutton has RGB lighting with up to 16 preset lighting scenarios.

Technical data

Operating temperature TF1/TF2 -40°C to +85°C -20°C to +70°C Operating temperature TF3

Degree of protection:

Electronic TF1/TF2/TF3 IP67 IP4X Keypad (mechanic) TF1/TF2 Keypad (mechanic) TF3 IP65 Keypad TF1/TF2/TF3 Protection class for IP4X installation housing

PLd compatible (EN ISO 13849, complies SIL2

Functional safety to DIN EN IEC 61508)



Example

	TF1	-23	-н	-E317	
Basic unit					
TF1 Keypad, pushbuttons with insert symbols					
TF2 Keypad, pushbuttons with predefined symbols					
TF3 Keypad, push-buttons with continuous front foil					
Size					
23 2x3 buttons					
24 2x4 buttons					
25 2x5 buttons					
45 4x5 buttons					
Installation position / symbol arrangement					
H Horizontal					
V Vertical					
Interface			_		
CAN				E317	
Supply voltage	9-32 V DC				
Idle current consumption	50 mA (24V DC, 6	excl. lighting)			
Protocol	CANopen CiA DS	301 or SAE J19	39 (based on)		
Baud rate	20 KBit/s to 1 Mb	oit/s (standard 2	50KBit/s)		
Wiring	CAN cable 300 m	ım without plug			
CAN Safety Interface				E417	
Supply voltage	9-32 V DC				
Idle current consumption	50 mA (24V DC, e	excl. lighting)			
Protocol	CANopen Safety	EN50325-5 or J	1939-76		
Baud rate	20 KBit/s to 1 Mb	oit/s (standard 2	50KBit/s)		
Wiring	CAN cable 300 m	m without plug			
Plug					
S Standard plug (see page 129)					
Special model					

Special / customer specified






Keypad size 2x3


23H: 2x3 horizontal


1	2	3
4	5	6

23V: 2x3 vertical





Installation opening

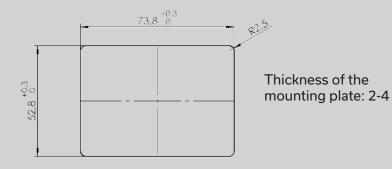


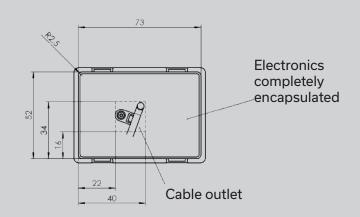

Keypad TF1-23...

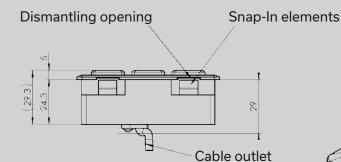

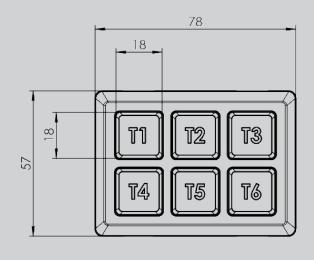

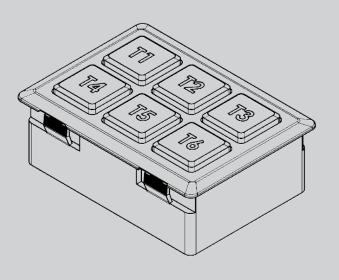


Technical details may vary based on configuration or application! Technical data subject to change without notice!





Dismantling opening Snap-In elements Cable outlet

Keypad TF3-23...

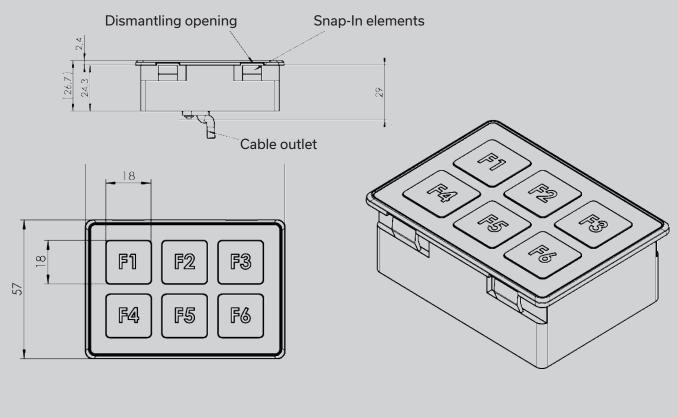






Keypad size 2x4


24H: 2x4 horizontal


1	2	3	4
5	6	7	8

Installation opening

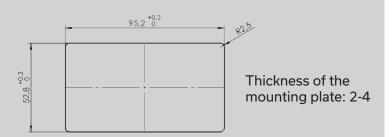



24V: 2x4 vertical

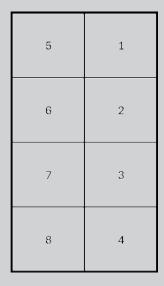


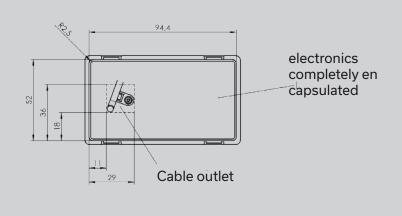


Keypad TF1-24...



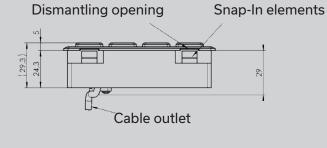

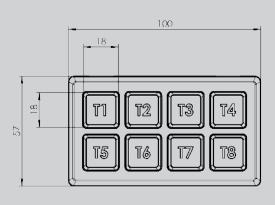

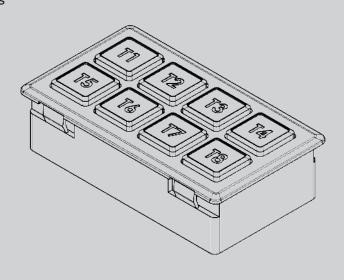



Technical details may vary based on configuration or application! Technical data subject to change without notice!







Keypad TF2-24...

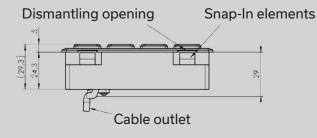


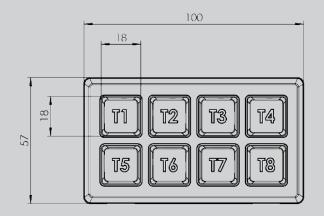


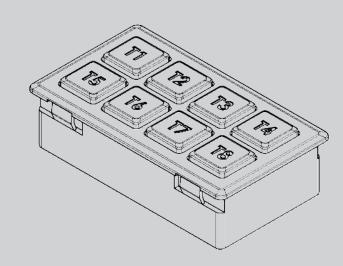

Keypad TF3-24...

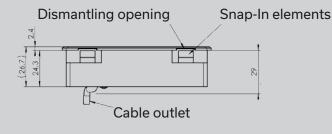

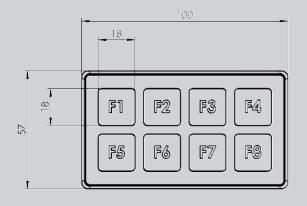


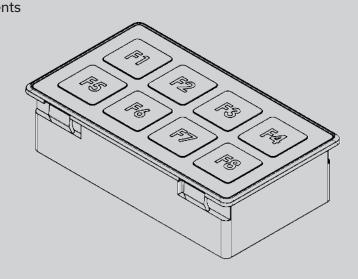

Technical details may vary based on configuration or application! Technical data subject to change without notice!






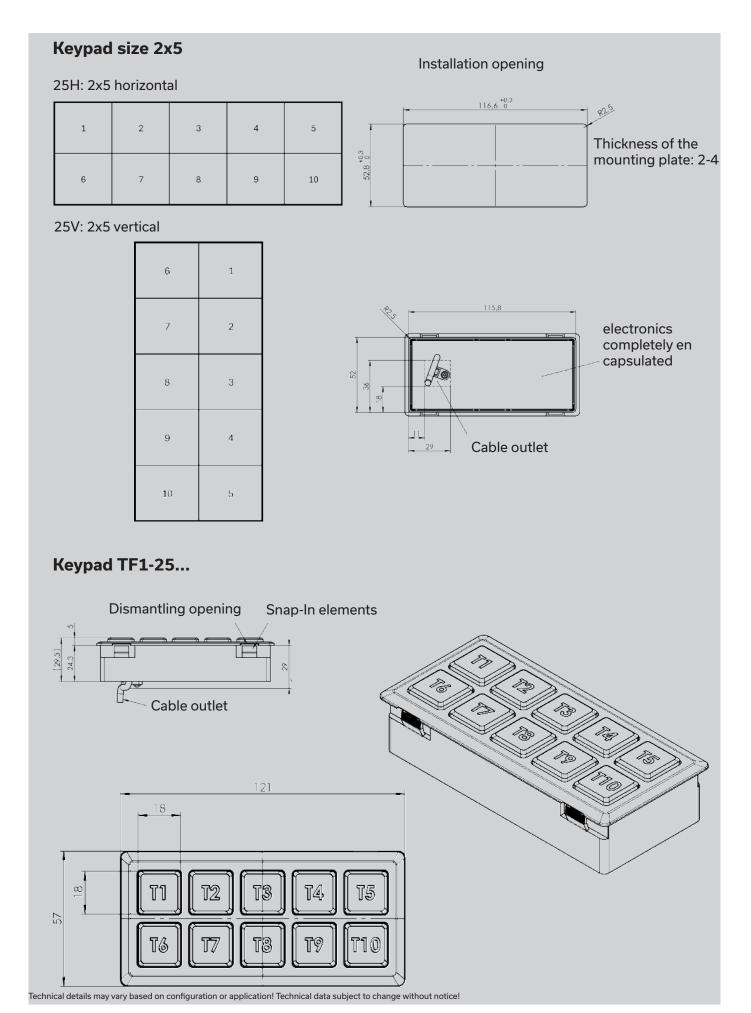





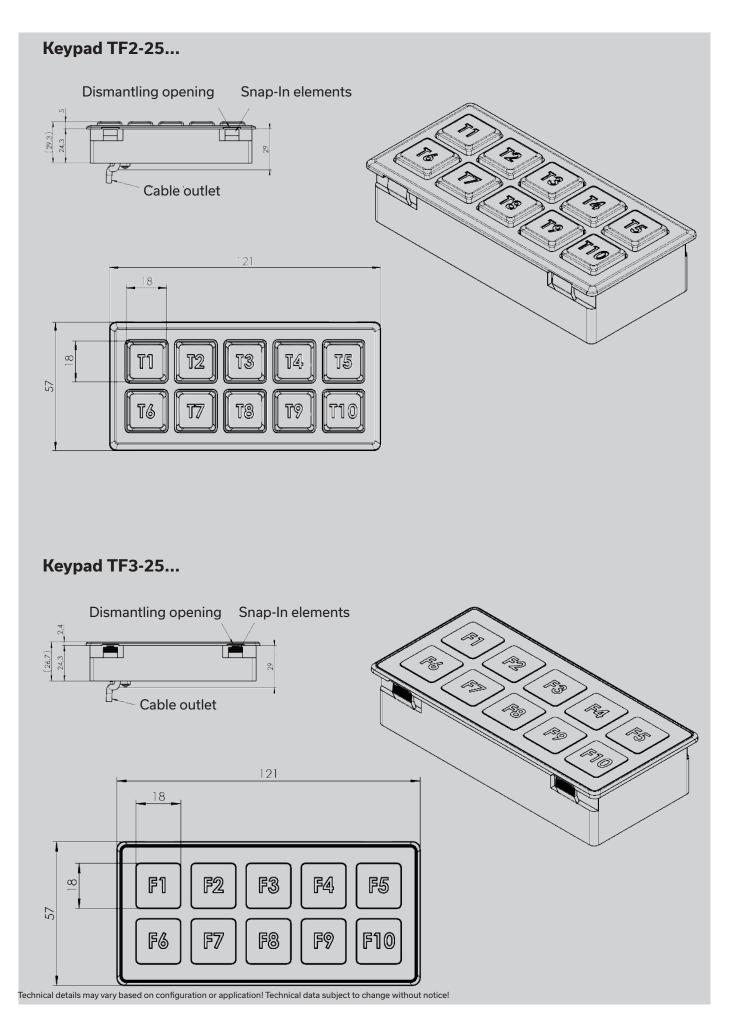






Keypad size 4x5

45H: 4x5 horizontal


16	11	6	1
17	12	7	2
18	13	8	3
19	14	9	4
20	15	10	5

Installation opening

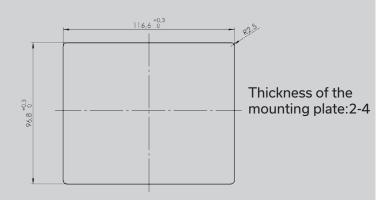


45V: 4x5 vertical

1	2	3	4	5
6	7	8	9	10
11	12	13	14	15
16	17	18	19	20

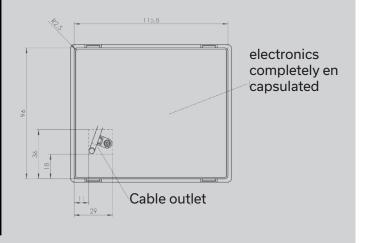






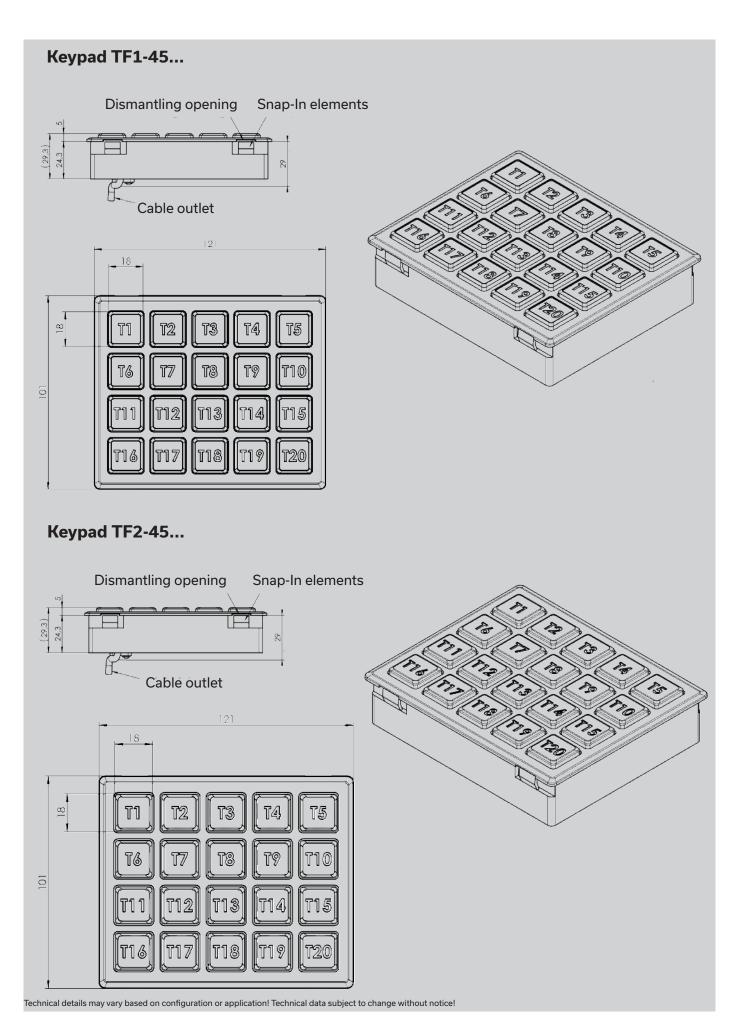





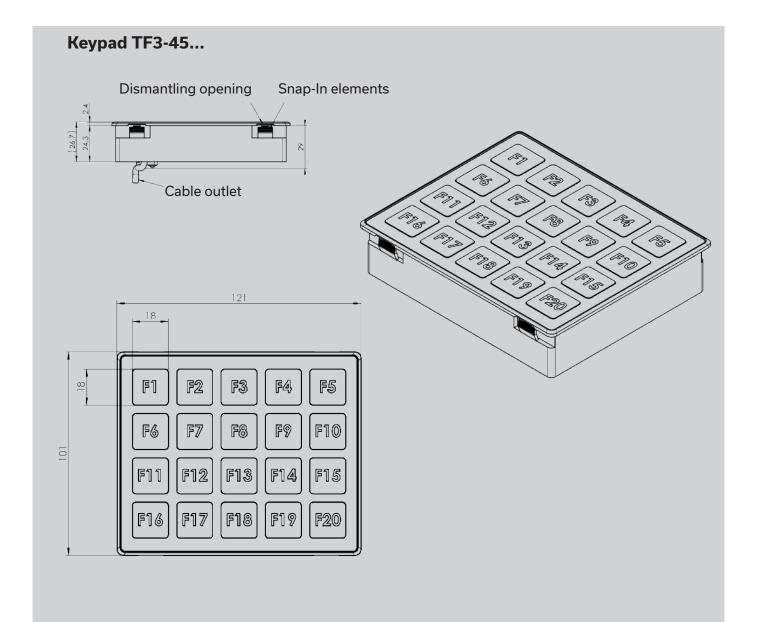

Steering Controller LG2




The steering controller LG2 is developed for the rough use in working machines. A long service life and high reliability is achieved by the latest contactless Hall technology. The CAN bus interface makes it easy to integrate the controller into any machine. The LG 2 is available with a handle or without a handle with a shaft outlet (12mm).

Technical data

Mechanical life LG2 10 million rotations See interface Supply voltage -40°C to +85°C Operation temperature Up to IP67 Degree of protection

PLd compatible (EN ISO 13849, complies SIL2 to DIN EN IEC 61508) Functional safety



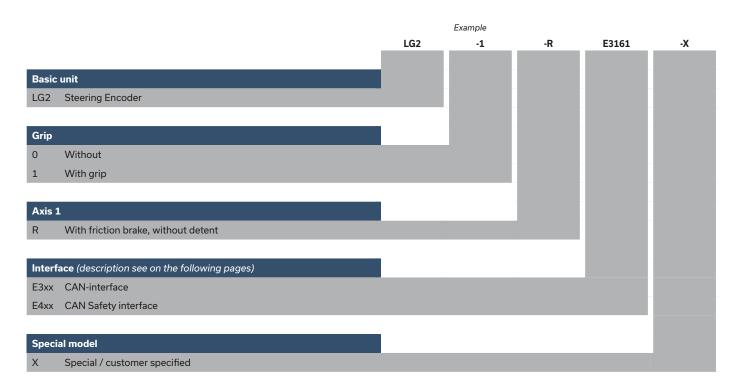

Steering Controller



CAN

Supply voltage 9-32 V DC

Idle current consumption 120 mA (24 V DC)

Protocol CANopen CiA DS 301 or SAE J1939 (based on)

Baud rate 20 kBit/s to 1 Mbit/s (standard 250 kBit/s)

Wiring CAN (IN) cable 300 mm with plug connector M12 (male)

CAN (OUT) cable 300 mm with plug connector M12 (female)

CAN E3161

CAN Safety

Supply voltage 9-32 V DC ldle current consumption 120 mA (24 V DC)

Protocol CANopen Safety EN50325-5 or J1939-76
Baud rate 20 kBit/s to 1 MBit/s (standard 250 kBit/s)

Wiring CAN (IN) cable 300 mm with plug connector M12 (male)

CAN (OUT) cable 300 mm with plug connector M12 (female)

CAN Safety E415 1


Attachments


Mating connector M12 male insert with 2 m cable 20201140


Mating connector M12 female insert with 2 m cable 20202298

Steering ControllerLG2




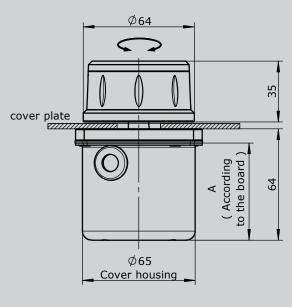





Hole pattern (installed from below)





The Foot Pedal P20 is a rugged switching device for electro-hydraulic. A long service life and high reliability is ensured by the latest contactless hall-technology. Due to the modular construction and the different electrical interfaces it is universally applicable...


Technical data

Mechanical life P20 10 million operating cycles

Operation temperature -40°C to +85°C Degree of protection P20 IP67 (electronic)

PLd compatible (EN ISO 13849, complies SIL2 to DIN EN IEC 61508) Functional safety





					Example			
			P20	-1	-ZZ	-E1041	-S	-X
	c unit		_					
P20	Foot	Pedal						
Peda								
1	"	Pedal shape A 0-15°	_					
2		Pedal shape B 0-25°						
3		Pedal shape C 15°-0-15°						
4		Pedal shape C 0-15°						
5		Pedal shape D 15°-0-15°						
J	HL	Gearshift mounted on the left side						
	HR	Gearshift mounted on the right side						
	TIIX	deals int modified on the right side						
Sprin	ng retur	'n						
Z		g return	_					
ZZ		ng return redundant						
		3						
Inter	faces (c	description see on the following pages)						
Е	0xx	Switching output						
Е	1xx	Voltage output						
Е	2xx	Current output						
Е	Зхх	CAN-interface						
Ε	4xx	CAN Safety interface						
Plug	connec	ctors						
S	Stand	dard plug connectors (see page 127)						
Spec	ial mod	lel						
Χ	Spec	ial / customer specified						





Digital output			
Supply voltage	9-32 V DC		
Current carrying capacity	Direction signal 150 mA		
	Zero position signal 500 mA		
Wiring	Cable 500mm long without plug connector		
	Optional with plug connector (standard plug connectors see page 127)		S
2 direction signals + 1 zero pos	E001 1		
1 direction signal + 1 zero posit	E003 1		

Voltage output (not stabilized)				
Supply voltage	4,75-5,25 V DC			
Current carrying capacity	Direction signal 8 mA			
Wiring	Cable 500mm long without plug connector			
	Optional with plug connector (standard plug connectors see page 127)			S
0,52,54,5 V redundant + 2 direction signals		E104 1		
0,52,54,5 V redundant + 1 direction signal		E145 1		
		Output options		
		Characteristic:		
		Inverse dual		1
		Dual		2
		Inverse dual with dead zone +/- 3° (stand	lard)	3
		Dual with dead zone +/- 3°		4

Voltage output				
Supply voltage	9-32 V DC (*11,5-32 V)			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Wiring	Cable 500mm long without plug connector			
	Optional with plug connector (standard plug connectors	see page 127)		S
0,52,54,5 V redundant + 2	direction signals + 1 zero position signal (galvanically isolate	ed)	E112 1	
0,52,54,5 V redundant + 1	direction signal + 1 zero position signal (galvanically isolated	d)	E146 1	
0 5 10 V redundant + 2 dire	ction signals + 1 zero position signal (galvanically isolated), si	supply voltage 11.5 - 32 V DC	E132 1	
	ction signal + 1 zero position signal (galvanically isolated), su		E147 1	
10010 V + 2 direction sign	als + 1 zero position signal (galvanically isolated), supply volt	tage 11,5 - 32 V DC,	E136 1	
sensor redundant with error n				
	C	Output options		
		Characteristic:		
	lr Ir	nverse dual *1		1
	D	Dual *1		2
	lr Ir	nverse dual with dead zone +/- 3° *1 (st	andard)	3
		Dual with dead zone +/- 3° *1 4		4
	*	*1 Not combinable with output E136X		
	S	Single *2		5
	S	Single with dead zone +/- 3° *2 (standar	d)	6
	*	*2 Not combinable with output E1121 a	nd E1321,	
	E	E1461 und E1471		
Voltage output with other valu	e on request!			



Current output				
Supply voltage	9-32 V DC			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Wiring	Cable 500 mm long without plug connector			
	Optional with plug connector (standard plug connecto	rs see page 127)		S
01020 mA + 2 direction sign	als + 1 zero position signal (galvanically isolated), sensor	redundant with error monitoring	E206 1	
and error signal				_
020 mA + 1 direction signal +	1 zero position signal (galvanically isolated), sensor redu	ndant with error monitoring signal	E222 1	
and error signal				
20020 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring			E208 1	
and error signal				
41220 mA + 2 direction sign	als + 1 zero position signal (galvanically isolated), sensor	redundant with error monitoring	E2141	
and error signal				
420 mA + 1 direction signal +	1 zero position signal (galvanically isolated), sensor redu	ndant with error monitoring	E223 1	
and error signal				
	als + 1 zero position signal (galvanically isolated), sensor	redundant with error monitoring	E2161	
and error signal				
		Output options		
		Single		5
		Single with dead zone +/- 3° (standard)		6
Current output with other value	on request!			


CAN		
Supply voltage	9-36 V DC	
Idle current consumption	120 mA	
Current carrying capacity	Direction signal 100 mA	
Protocol	CANopen CiA DS 301 or SAE J 1939 (based on)	
Baud rate	125 kBit/s to 1 Mbit/s (standard 250 kBit/s)	
Wiring	CAN (IN) cable 500 mm with plug connector M12 (male)	
	CAN (OUT) cable 500 mm with plug connector M12 (female)	
CAN P20		E307 1
With additional digital output	separately wired (not via CAN)	
- 1 direction signal		2

CAN Safety		
Supply voltage	9-36 V DC	
Idle current consumption	120 mA	
Current carrying capacity	Direction signal 100 mA	
Protocol	CANopen Safety EN50325-5 or J1939-76	
Baud rate	125 kBit/s bis 1 MBit/s (standard 250 kBit/s)	
Wiring	CAN (IN) cable 500 mm with plug connector M12 (male)	
	CAN (OUT) cable 500 mm with plug connector M12 (female)	
CAN Safety P20		E407 1
With additional digital outputs	separately wired (not via CAN)	
- 1 direction signal		2


Attachments	
Z01 Mating connector M12 male insert with 2 m cable	20201140
Z02 Mating connector M12 female insert with 2 m cable	20202298





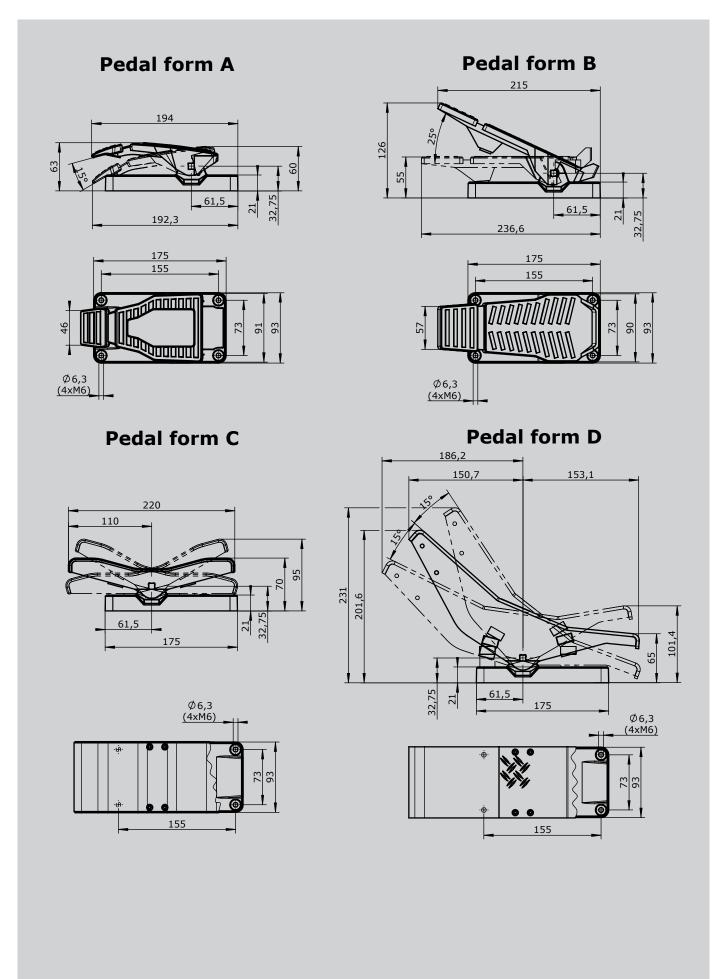



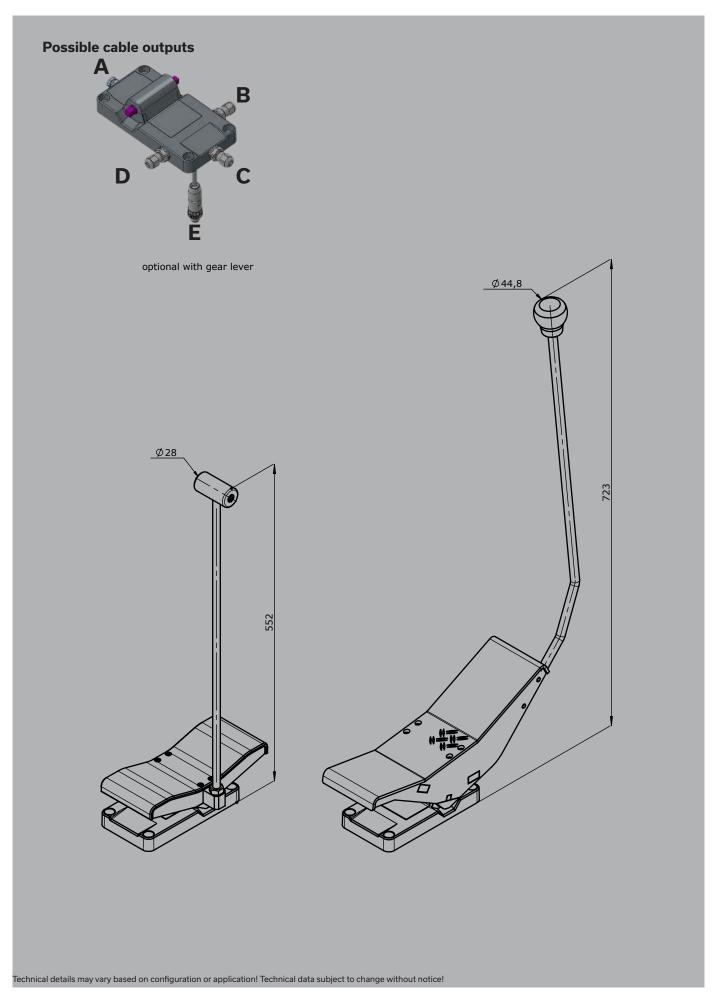

Foot Pedal P10 / P11 / P12





The Foot Pedal P10 / P11 / P12 is a rugged switching device for electro-hydraulic. The modular design enables the switching device to be used universally. The P10/P11/P12 is resistant to oil, maritime, climate, ozone and UV radiation.


Technical data

Mechanical life P10 8 million operating cycles

Operation temperature -40°C to +85°C


Degree of protection P10 IP66




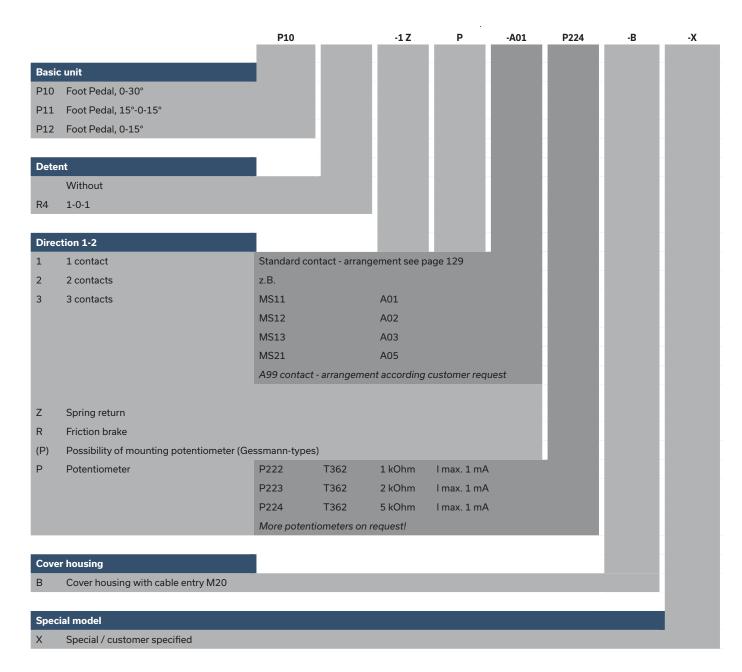

Foot Pedal P10/P11/P12



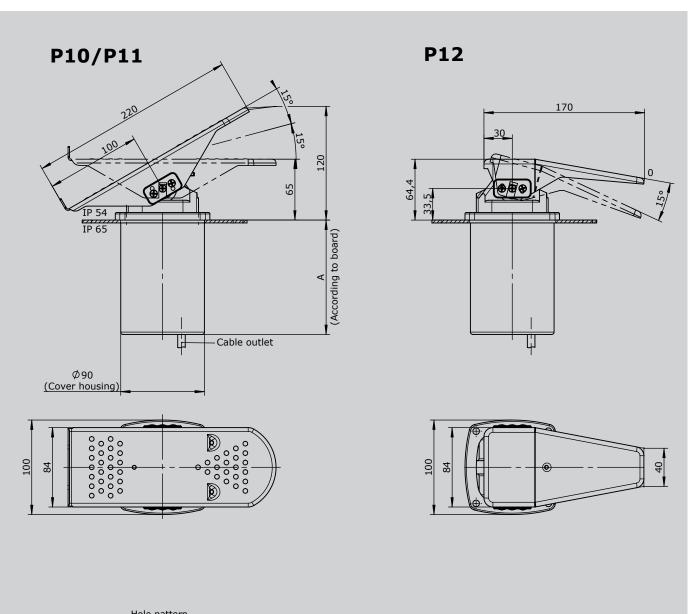



P8 / PP8



The Foot Pedal P8 / PP8 is a rugged switching devices for footing applications. The Foot Pedal is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data


Mechanical life P86 million operating cyclesMechanical life PP810 million operating cycles

Operation temperature -40°C to +85°C

Degree of protection P8 IP54
Degree of protection PP8 IP65


Colour RAL 7032 pebble-grey




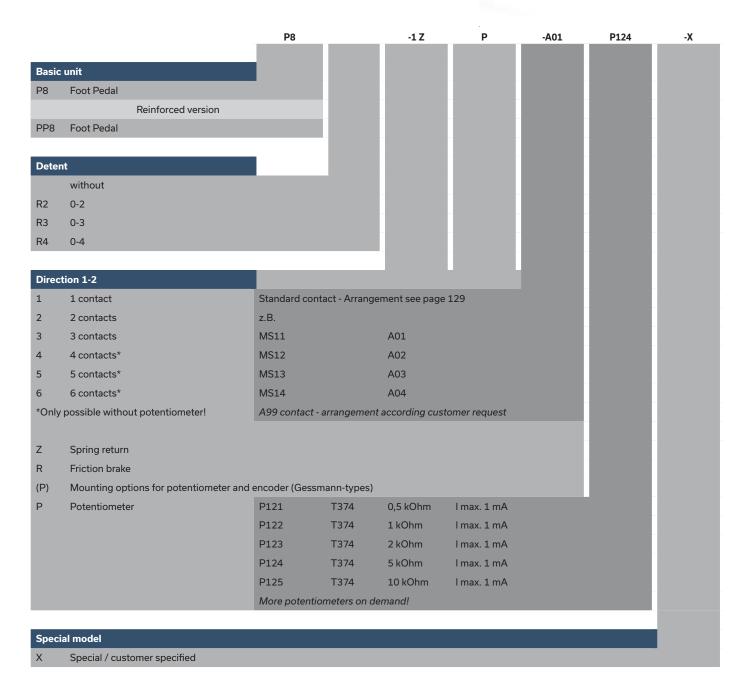





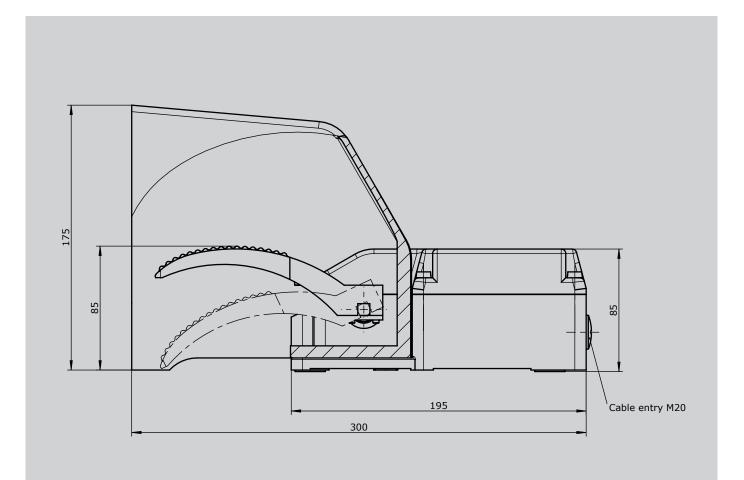

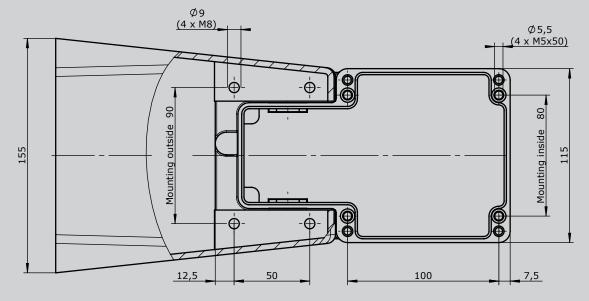

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Foot Pedal



The Foot Pedal P7 / PP7 is a rugged switching devices for footing applications. The Foot Pedal is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data


Mechanical life P76 million operating cyclesMechanical life PP710 million operating cycles

Operation temperature -40°C to +85°C

Degree of protection P7 IP54
Degree of protection PP7 IP65


Colour RAL 7032 pebble-grey




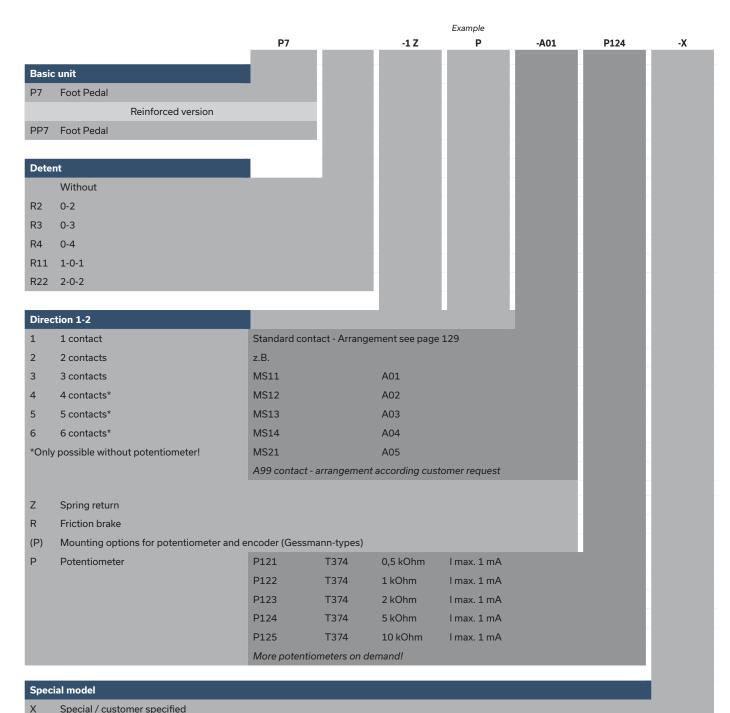





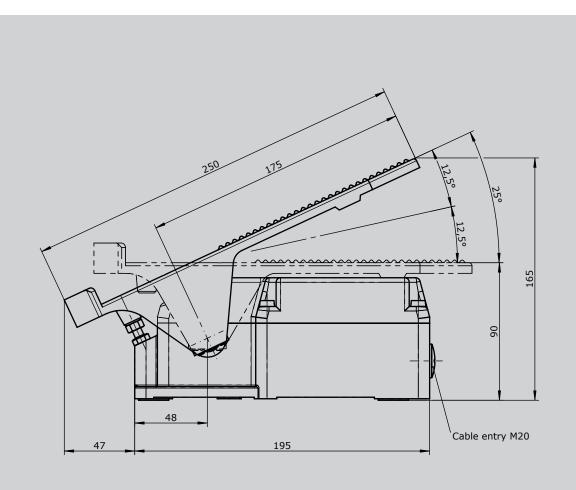

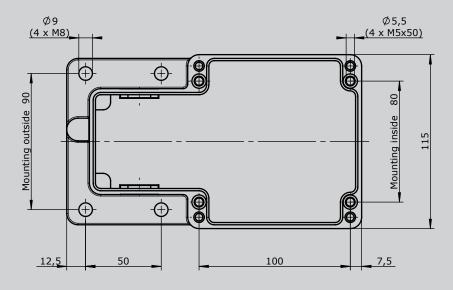

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Remote Operator Station



The Gessmann ROS1 is a fully customisable remote operator station designed to replicate the in-cab experience with high precision and an ergonomic focus

Equipped with our C1's and adjustable screen wall, the ROS1 offers six degrees of ergonomic articulation—including 200 mm desk height adjustment, 390mm screen height range and armrest tilt, pivot, lateral and longitudinal movement.

Ideal for high-demand applications, it reduces operator fatigue and enhances control accuracy. Suitable for seated or standing operation.

Available in Compact and ROS+ sizes, with all features—including controls and desk components—custom-built to your needs.

PLC cabinet / control box optional - up to one per leg.

Colors

Table top gray RAL 7024 Metal parts white RAL 9016 Lighting Stripe red RAL 3018



ROS12 / C1L / C1R - A1 - M1 - L1 / KLV / X

в	а	S	iC	u	n	П

ROS 11 Remote Operator Station 1400mm x 1200mm

ROS 12 Remote Operator Station 1800mm x 1400mm

Control Console

C1L Control Console C1 left
C1R Control Console C1 right

Options

A1 Angle and longitudinal adjustment of armrest

A2 Angle, longitudinal, lateral, tilt and pivot adjustment of armrest

M1 Separate height adjustment for each monitorL1 Logo on the outside of the distributor housing

Attachments

Gooseneck microphone

Ollin Laptop/ tablet holder

Ollin movable monitor arm

Honeywell LED light

Fan for distribution box

Office chair KAB Controller Heavy Duty Leather

Office chair KAB Controller Leather Trim

Office chair KAB Controller Fabric

Other features and attachments as per customer requirements

Wiring

KL Without wiring, but terminal block built in each terminal
KLV On terminal block 4 mm with single wire 1 mm² each terminal
KLV On SPS (SPS provision) with single wire 1 mm² each terminal

KLVA External wiring single wire highly flexible 1,5 $\,\mathrm{mm^2}$, 5 $\,\mathrm{m}$ long each terminal

Additional-/ reduction price per meter


Special model

X Special painting

X Special / customer specified


Remote Operator Station ROS



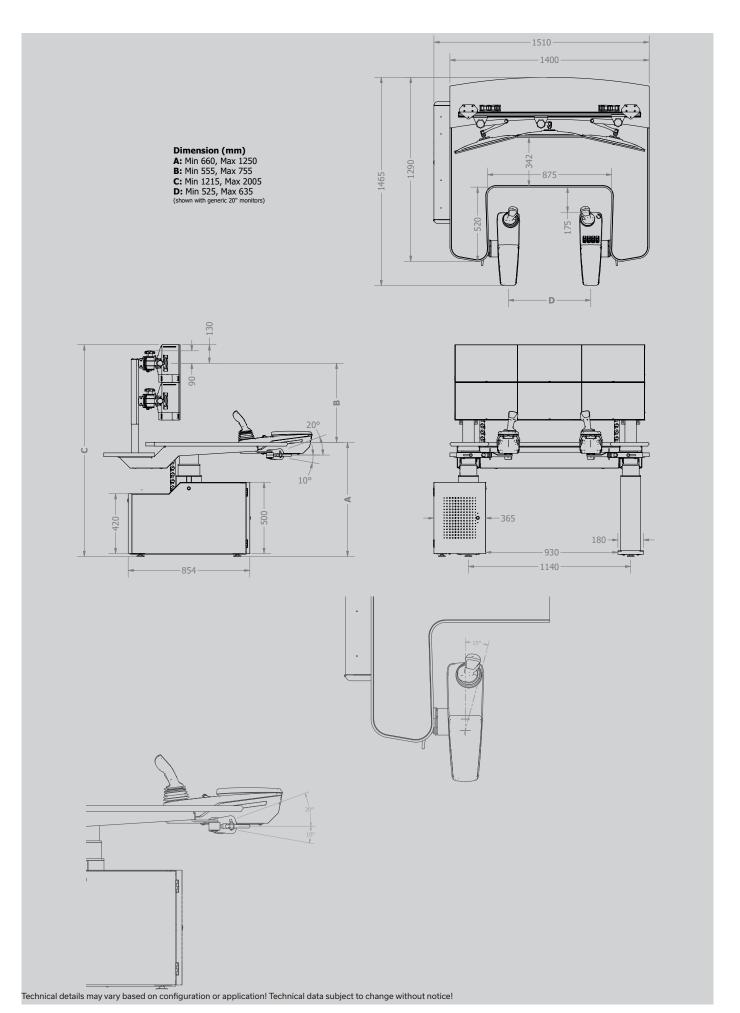

Remote Operator Station ROS



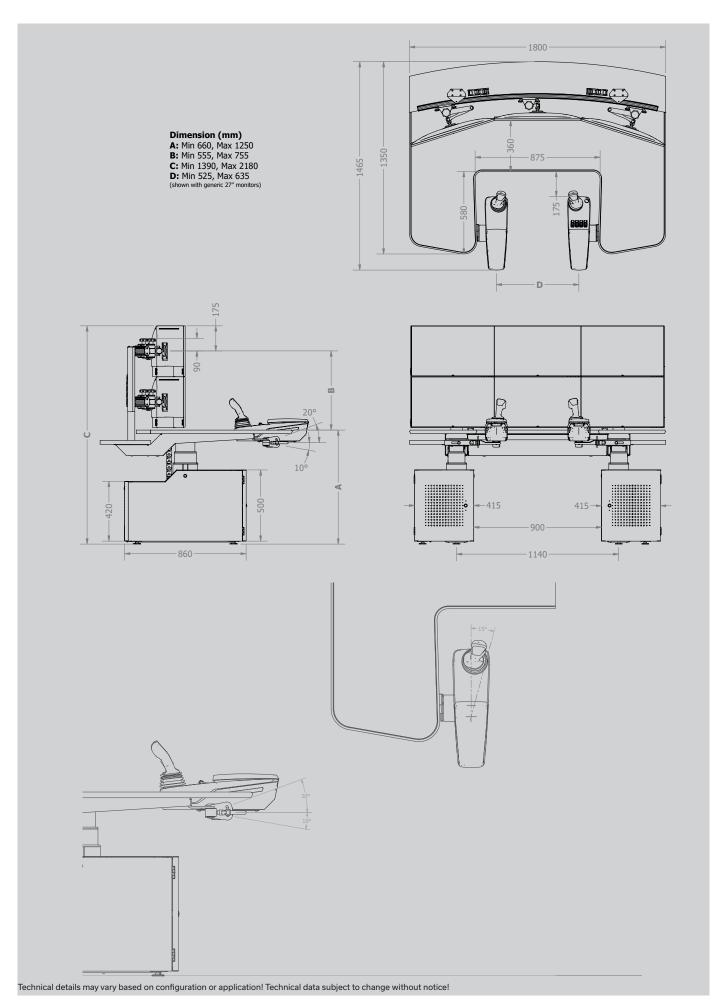

Control UnitKST 32 swiveling with memory-function



The KST32 is an ergonomically designed swiveling control chair which provides a high degree of comfort. The seating system ensures a comfortable posture and a healthy working position. The control stand is equipped with a memory system. Three seat positions can be saved for each driver. Each driver can save these to an RFID memory chip.

Electrically adjustable functions:

- => inclination of the backrest
- => Inclination of the seat
- => Inclination of the two control panels
- => Horizontal adjustment of the seat incl. the consoles
- => Horizontal adjustment of the seat without consoles


The consoles attached to the driver's seat swing with the seat.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the Driver's Seat forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. Swivel base has zero-clearance bearings and rotation can be locked in 2° steps.

Surface treatment: Base coat and textured varnish Standard colour RAL 9011 black



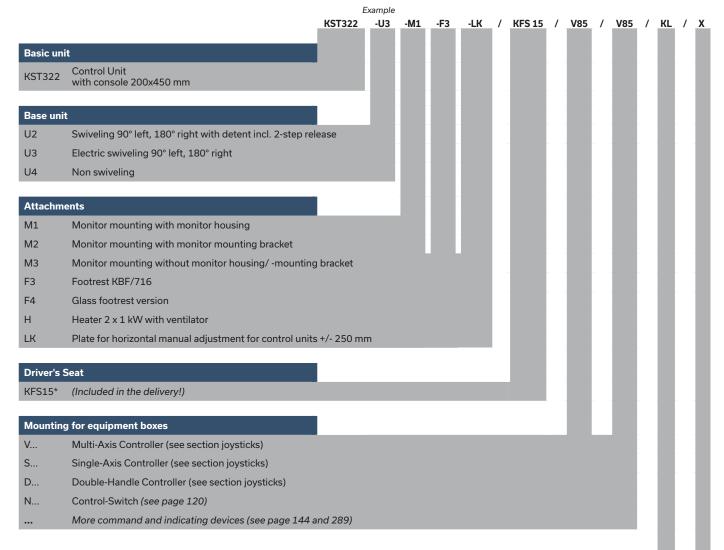






KST322 -U3 -M1 -F3 -LK / KFS 15 / V85 / V85 / KL / X

Wiring	
KL	Without wiring, but terminal block built in each terminal
KLV	On terminal block 4 mm² with single wire 1 mm² each terminal
KLV	On SPS (SPS provision) with single wire 1 mm² each terminal
KLVA	External wiring single wire highly flexible 1,5 mm², 5 m long each terminal
	Additional-/ reduction price per meter

Special model

- X Special / customer specified
- X Special painted

Control UnitKST 32 swiveling with memory-function

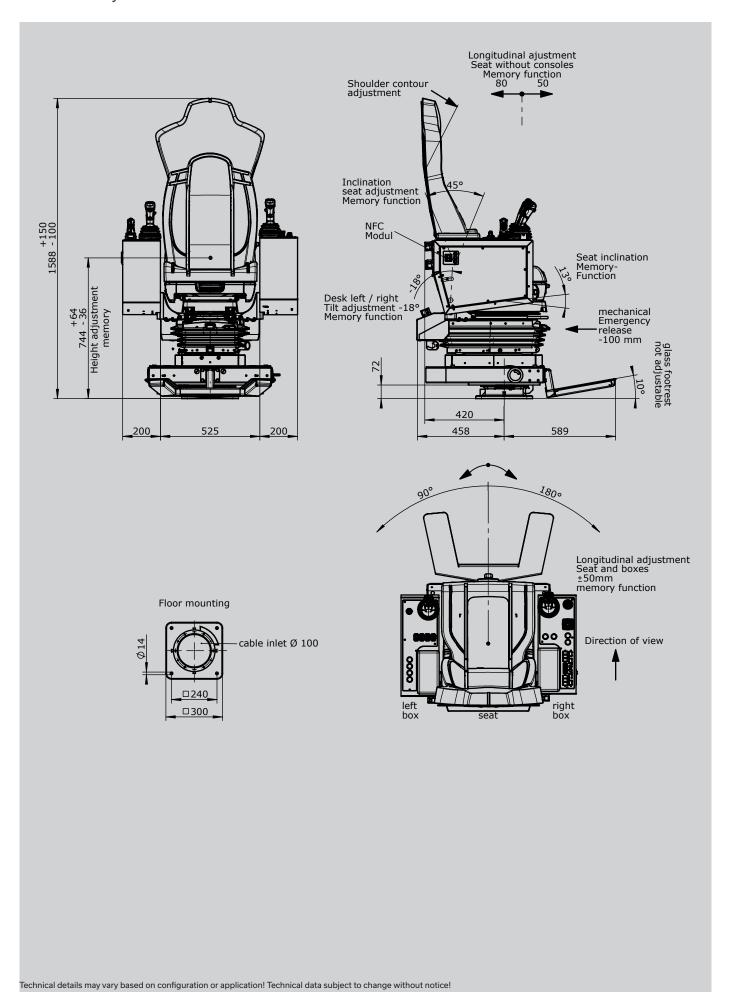





GESSMANN

The KST31 is an ergonomically designed swiveling control chair which provides a high degree of comfort. The consoles, mounted to the Driver's Seat, swing with the seat. The consoles can be positioned to perfectly match any person by means of length, height and inclination adjustment. The standard version includes:

Consoles:

The plastic consoles can be equipped with custom command and indicating devices.

Driver's Seat:

The comfortable Driver's Seat KFS 11 is equipped with a spring loaded hydraulic vibration absorption system, including weight adjustment, air-permeable textile cover, arm rests and head rest.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the Driver's Seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. Swivel base has zero-tolerance bearings and rotation can be locked in 3° steps.

Standard colour Traverse RAL 9011 black Control panels RAL 7016 anthracite



Example

KST311 -U2 -M1 -F3 -LK3 / KFS 11 / V85 / V85 / KL / X

Basic unit	
KST311	Consoles 160x520 mm with insert plate (flat) variant 1
KST312	Consoles 160x520 mm with insert plate (with apsorption)
	variant 2

Base unit	
U2	Swiveling 90° left, 180° right with detent incl. 2-step release
U3	Electric swiveling 90° left, 180° right
U4	Non swiveling

Attachments					
M1	Monitor mounting with monitor housing				
M2	Monitor mounting with monitor mounting bracket				
МЗ	Monitor mounting without monitor housing/-mounting bracket				
USB	USB-plug socket 2-fold, 1 x 1.5 A (mounted in the left storage compartme				

F3	Footrest KBF/716
F4	Glass footrest version
Н	Heater 2 x 1 kW with ventilator

Horizontal manual adjustment +/- 470 mm

Driver's Seat

KFS11*	(Included in the delivery!)
KFS9*	
KFS10*	

KFS12*

LK3

*Description see Driver's Seat page 296

Technical details may vary based on configuration or application! Technical data subject to change without notice!






KST311 -U2 -F3 -LK3 / KFS 11 / V85 V85 KL -M1 Mounting for equipment boxes V... Multi-Axis Controller (see section joysticks) S... Single-Axis Controller (see section joysticks) D... Double-Handle Controller (see section joysticks) Control-Switch (see page 120) N... More command and indicating devices (see page 144 and 289) Wiring KL Without wiring, but terminal block built in each terminal KLV On terminal block 4 mm with single wire 1 mm² each terminal KLV On SPS (SPS provision) with single wire 1 mm² each terminal External wiring single wire highly flexible 1,5 mm², 5 m long each terminal KLVA Additional-/ reduction price per meter Special model Χ Special / customer specified Χ Special painted





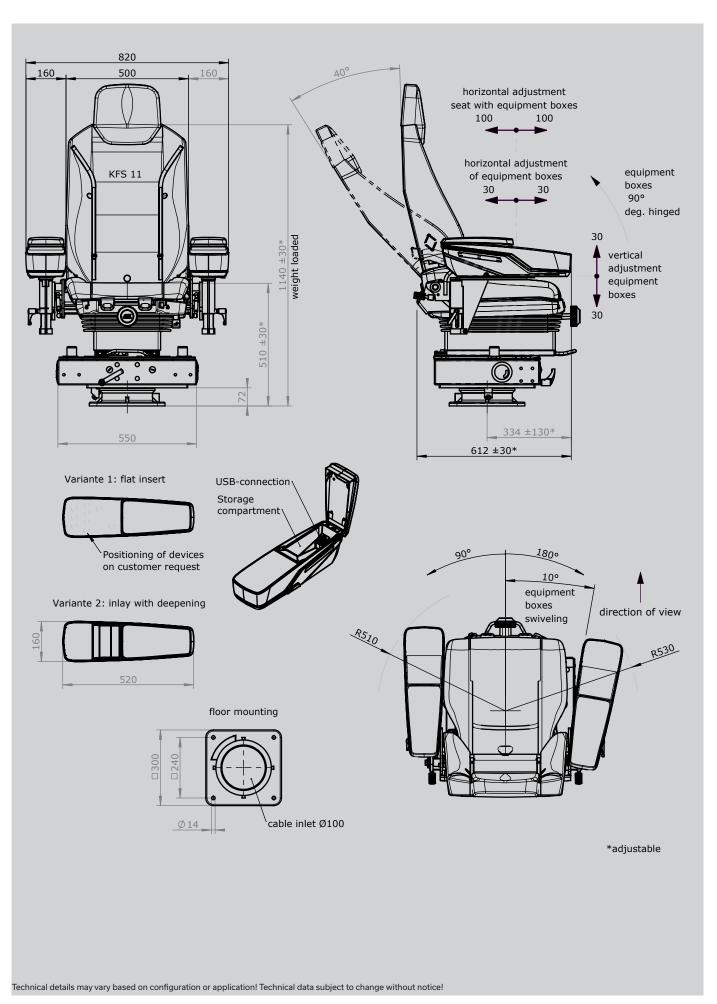


Traversing Unit



The LK 3 manual traversing unit can be used as an option for our Control Unit KST31. The traversing unit and the turning device can be conveniently unlocked with just one lever. A floor recessed version and a floor mounted version are available.


Surface treatment:
Primer and textured top coat
Standard color RAL 9011 black or 7035 light gray



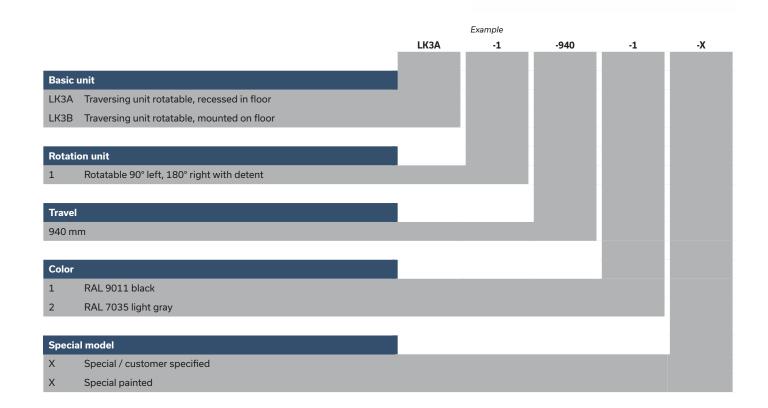

Traversing Unit



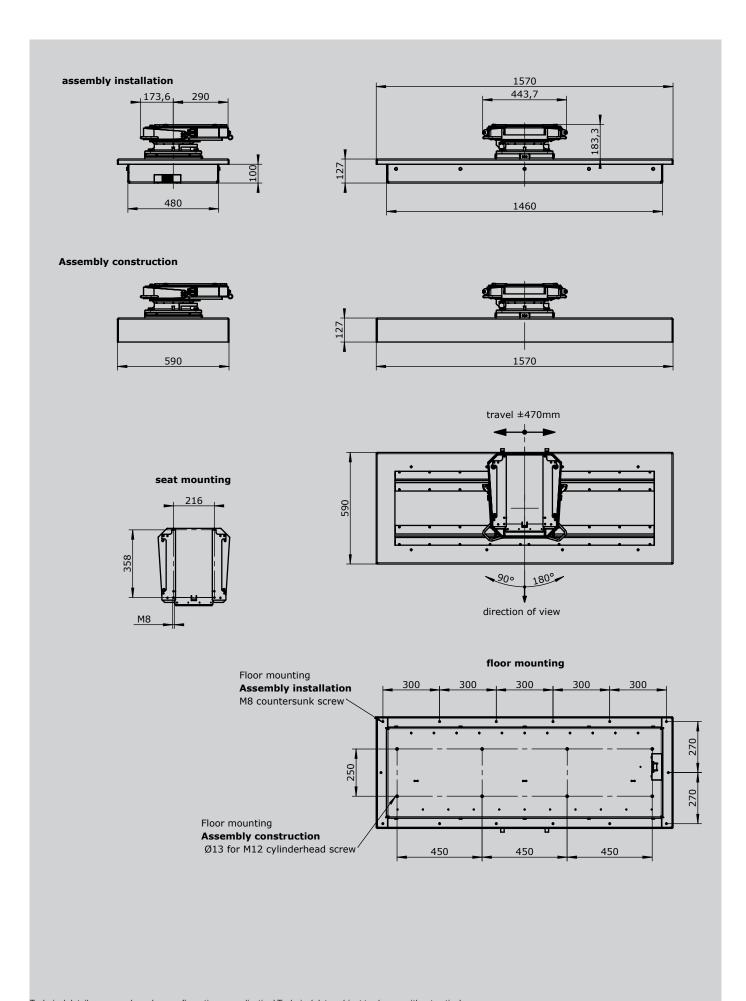

Control Unit KST 30 swiveling



GESSMANN

The KST30 is an ergonomically designed swiveling chair which provides a high degree of comfort. The inner consoles, mounted to the Driver's Seat, swing with the seat. The consoles can be positioned to perfectly match any person by means of length, height and inclination adjustment. For console version 1 the whole control unit can be expanded by additional fixed outer consoles.

The standard version includes:

Inner consoles:

The plastic consoles can be height-adjusted to match joysticks of any size. In addition consoles can be equipped with custom command and indicating devices.

Outer consoles:

The outer metal consoles feature foldable top covers, including mechanical fixation to keep cover in open position. Internal terminal strips can easily be accessed be removeable side covers. Command and indicating devices can be added based on customer's choice. Also special sizes and shapes of outer consoles are available on request.

Driver's Seat:

The comfortable Driver's Seat KFS 11 is equipped with a spring loaded hydraulic vibration absorption system, including weight adjustment, air-permeable textile cover, arm rests and head rest.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the Driver's Seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. Swivel base has zero-tolerance bearings and rotation can be locked in 3° steps.

Surface treatment:

Base coat and textured varnish

Standard colour RAL 7035 light grey in combination with RAL 7015 slate-grey



	KST3011	-U2	-M1	-F3	-LK	/	KFS 11	/	V85	/	V85	/	KL	/	
Basic unit	_														
KST3001	Control Unit with inner equipment boxes version 1														
KST3011	Control Unit with inner eqiupment boxes version 1 and outside eqiupment boxes 160 mm wide														
KST3031	Control Unit with inner eqiupment boxes version 1 and outside eqiupment boxes 270 mm wide														
KST3041	Control Unit with inner eqiupment boxes version 1 and outside eqiupment boxes 320 mm wide														
	Special equipment boxes form on request!														
Base unit															
U2	Swiveling 90° left, 180° right with detent incl. 2-step release	9													
U3	Electric swiveling 90° left, 180° right														
U4	Non swiveling														
Attachmen															
M1	Monitor mounting with monitor housing														-
M2	Monitor mounting with monitor mounting bracket														
M3	Monitor mounting without monitor housing/ -mounting bra	icket													ı
F3	Footrest KBF/716														
F4	Glass footrest version														
LK	Plate for horizontal manual adjustment for control units +/-	250 mr	m												
Driver's Se															ł
KFS11*	(Included in the delivery!)														
KFS9*															
KFS10*															
KFS12*															
*Descriptio	on see Driver's Seat page 298														

Example






KST3011 -U2 -M1 -F3 -LK / KFS 11 / V85 / V85 KL Mounting for equipment boxes V... Multi-Axis Controller (see section joysticks) S... Single-Axis Controller (see section joysticks) D... Double-Handle Controller (see section joysticks) N... Control-Switch (see page 120) More command and indicating devices (see page 144 and 289) Wiring KL Without wiring, but terminal block built in each terminal KLV On terminal block 4 mm with single wire 1 mm² each terminal KLV On SPS (SPS provision) with single wire 1 mm² each terminal KLVA External wiring single wire highly flexible 1,5 mm², 5 m long each terminal Additional-/ reduction price per meter Special model Χ Special / customer specified Χ Special painted





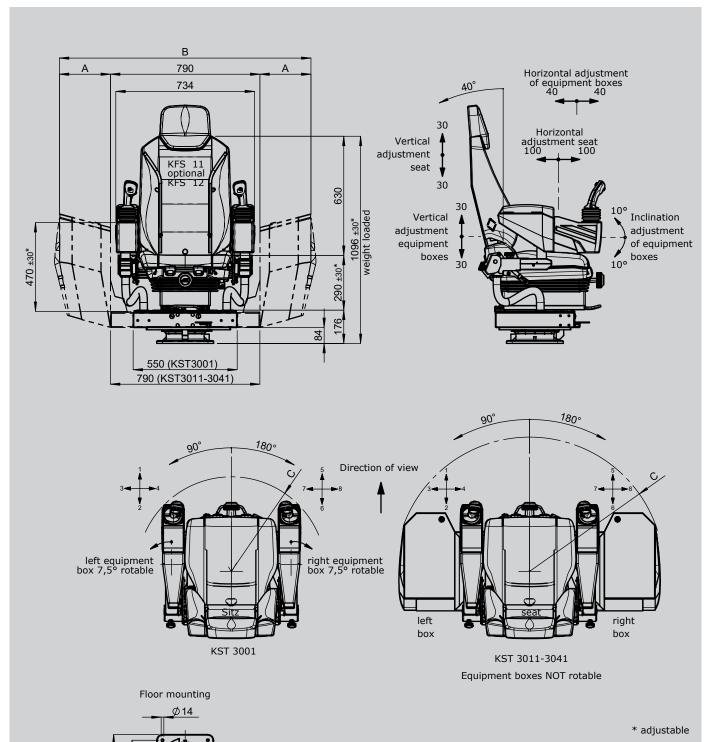

Туре	Dim. A	Dim. B	Dim. C
KST 3001	-	-	500
KST 3011	160	1110	610
KST 3031	270	1330	710
KST 3041	320	1430	755

Technical details may vary based on configuration or application! Technical data subject to change without notice!

cable inlet Ø100

Control Unit KST 19 swiveling



GESSMANN

The KST19 is an ergonomically designed swiveling control chair which provides a high degree of comfort.

Equipment boxes:

The equipment boxes are vertically and horizontally adjustable. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is carried out through a cross-member in the traverse. (Terminal block)

Driver's Seat:

As standard the KST19 is fitted with a KFS10 seat. The seat itself is fitted with a pneumatic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:

The swivel base is zero-clearance bearing and can be locked either by a detent (standard) in 3° steps or stepless by a friction brake.

Surface treatment:

Base coat and textured varnish

Standard colour RAL 7035 light grey, equipment boxes RAL 7016 anthracite



Example

KST19 -U1 -M1 -F3 -LK / KFS 10 / V85 / V85 / KL

Basic unit

KST19 Control Unit with equipment boxes

Base unit

U1	Swiveling 90° left, 180° right with friction brake

U2 Swiveling 90° left, 180° right with detent incl. 2-step release (standard)

U4 Non swiveling

Attachments

M1	Monitor mounting with monitor housing
M2	Monitor mounting with monitor mounting bracket
МЗ	Monitor mounting without monitor housing/-mounting bracket
M4	Monitor mounting (Monitor < 5 kg) with monitor housing
M5	Monitor mounting (Monitor < 5 kg) with mounting adapter
F3	Footrest KBF/864
F4	Glass footrest version
Н	Heater 2 x 1 kW with ventilator
LK	Plate for horizontal manual adjustment for control units +/- 250 mr

Driver's Seat

KFS10* (Included in the delivery!)

*Description see Driver's Seat page 296






KST19 -U1 -M1 -F3 / KFS10 / V85 V85 KL -LK Mounting for equipment boxes V... Multi-Axis Controller (see section joysticks) S... Single-Axis Controller (see section joysticks) D... Double-Handle Controller (see section joysticks) N... Control-Switch (see page 120) More command and indicating devices (see page 144 and 289) Wiring KL Without wiring, but terminal block built in each terminal KLV On terminal block 4 mm² with single wire 1 mm² each terminal KLV On SPS (SPS provision) with single wire 1 mm² each terminal External wiring single wire highly flexible 1,5 mm 2 , 5 m long each terminal KLVA Special model Special / customer specified X^2 Special painted Option



GESSMANN

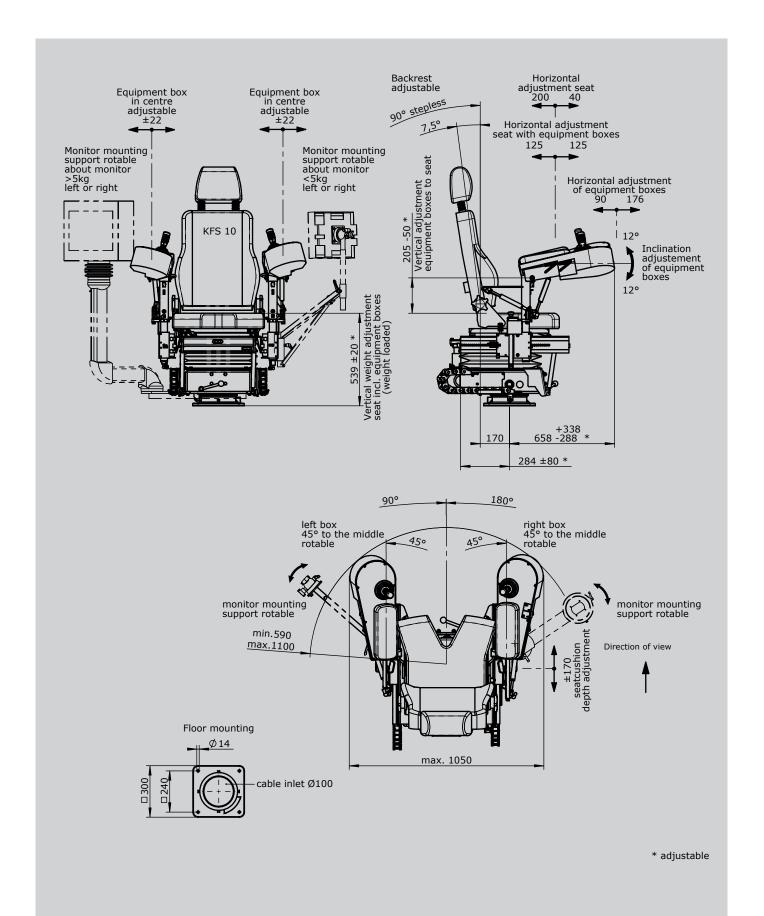

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Control Unit KST 10 swiveling



GESSMANN

The KST10 is an ergonomically designed swiveling control chair which provides a high degree of comfort.

Equipment boxes:

The equipment boxes are vertically and horizontally adjustable. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is carried out through a cross-member in the traverse. (Terminal block)

Special boxes available upon request.

Driver's Seat:

As standard the KST10 is fitted with a KFS11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the Driver's Seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. The swivel base is zero-clearance bearing and can be locked either by a detent (standard) in 3° steps or stepless by a friction brake.

Surface treatment: Base coat and textured varnish Standard colour RAL 9011 black



V85

V85.1

KL

		KSIIU	-01	-MT	-F3	-LK	١′	KF3 11	Γ΄.	V65	,	V85.1	, [KL	,	^
Basic un	nit									-						
KST10	Control Unit with equipment boxes															
Base un	it															
U1	Swiveling 90° left, 180° right with friction bra	ke														
U2	Swiveling 90° left, 180° right with detent incl. (standard)	2-step rele	ase													
U3	Electric swiveling 90° left, 180° right															
U4	Non swiveling															
U5	Without base frame															
		_														
Attachm	nents															
M1	Monitor mounting with monitor housing															
M2	Monitor mounting with monitor mounting br	acket														
M3	Monitor mounting without monitor housing/	mounting b	oracket													
F3	Footrest KBF/716															
F4	Glass footrest version															
Н	Heater 2 x 1 kW with ventilator															
LK	Plate for horizontal manual adjustment of co	ntrol units +	·/- 250 r	mm												
Driver's	Seat															
KFS11*	(Included in the delivery!)															
KFS9*																
KFS10*																
KFS12*																
*Descrip	otion see Driver's Seat page 296															

KST10

-U1

-M1

-F3

-LK

KFS 11





KST10 -U1 -M1 -F3 -LK / KFS 11 / V64 / V64.1 / KL / X

Mounting for equipment boxes

- V... Multi-Axis Controller (see section joysticks)
- S... Single-Axis Controller (see section joysticks)
- D... Double-Handle Controller (see section joysticks)
- N... Control-Switch (see page 120)
- ... More command and indicating devices (see page 144 and 289)

Wiring

- KL Without wiring, but terminal block built in each terminal
- KLV On terminal block 4 mm² with single wire 1 mm² each terminal
- KLV On SPS (SPS provision) with single wire 1 $\,\mathrm{mm^2}$ each terminal
- KLVA External wiring single wire highly flexible 1,5 mm², 5 m long each terminal


Special model

- X Special / customer specified
- X² Special painted

Option





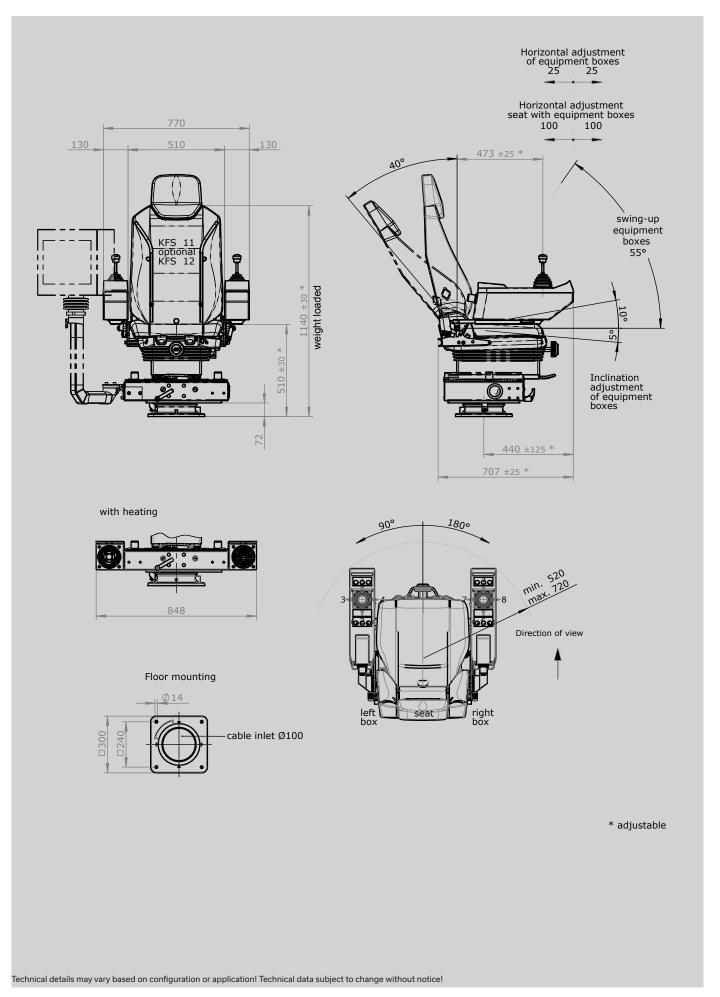

Control Unit KST 4 swiveling



GESSMANN

The KST4 is an ergonomically designed swiveling control chair which provides a high degree of comfort.

Equipment boxes:

The sheet steel equipment boxes are vertically and horizontally adjustable. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is carried out through a cross-member in the traverse. (Terminal block) Special boxes available upon request.

Driver's Seat:

As standard the KST4 is fitted with a KFS11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the Driver's Seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. The swivel base is zero-clearance bearing and can be locked either by a detent (standard) in 3° steps or stepless by a friction brake.

Surface treatment: Base coat and textured varnish Standard colour RAL 9011 black



	KST41	-U1	-M1	-F3	-LK	/	KFS 11	/	V64	/	V64.1	/	KL	/	Х
Basic uni	it .														
KST41	Control Unit with equipment boxes 160 x 420 mm														
KST42	Control Unit with equipment boxes 200 x 420 mm														
										-					
Base unit	t														
U1	Swiveling 90° left, 180° right with friction brake														
U2	Swiveling 90° left, 180° right with detent incl. 2-step (standard)	release													
U3	Electric swiveling 90° left, 180° right														
U4	Non swiveling														
U5	Without base frame														
Attachm	ents														
M1	Monitor mounting with monitor housing														
M2	Monitor mounting with monitor mounting bracket														
M3	Monitor mounting without monitor housing/-moun	ing brac	ket												
F3	Footrest KBF/716														
F4	Glass footrest version														
Н	Heater 2 x 1 kW with ventilator														
LK	Plate for horizontal manual adjustment of Control U	nits +/- 2	250 mm												
Driver's S	Seat														
KFS11*	(Included in the delivery!)														
KFS9*															
KFS10*															
KFS12*															

Ε,,

*Description see Driver's Seat page 296






		KST41	-U1	-M1	-F3	-LK	/	KFS 11	/	V64	/	V64.1	/	KL	/	X
Mount	ing for equipment boxes															
V	Multi-Axis Controller (see section joysticks)															
S	Single-Axis Controller (see section joysticks)															
D	Double-Handle Controller (see section joystic	ks)														
N	Control-Switch (see page 120)															
	More command and indicating devices (see p	age 144	and 28	9)												
Wiring	ı															
KL	Without wiring, each terminal block built in ea	ach termi	nal													
KLV	On terminal block 4 mm² with single wire 1 m	m² each t	erminal													
KLV	On SPS (SPS provision) with single wire 1 mn	n² each te	erminal													
KLVA	External wiring single wire highly flexible 1,5	mm², 5 m	long ea	ch term	inal											
Specia	ıl model															
X	Special / customer specified															
X^2	Special painted															

Option





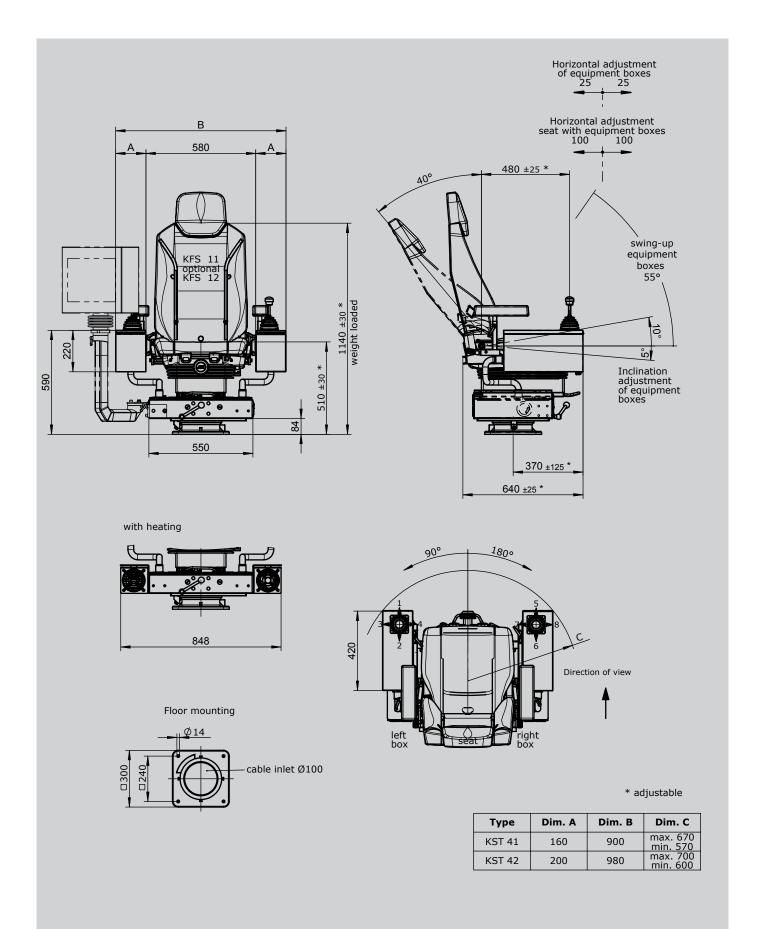

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Control Unit KST 5 swiveling



GESSMANN

The KST5 is an ergonomically designed swiveling control chair which provides a high degree of comfort.

Equipment boxes:

The equipment boxes are made from sheet steel and as standard have a hinged lid with locking feature. This allows for easy inspection and maintenance. The side of the equipment boxes is as standard fitted with an inspection plate which again is lockable. The arrangement of the joystick, indicators and control devices is cutomised according to customer specifications. This combined with the custom sized and profiled equipment boxes that are available means that the KST5 is very flexible and customisable solution.

Driver's Seat:

As standard the KST5 is fitted with a KFS11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the Driver's Seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. The swivel base is zero-clearance bearing and can be locked either by a detent (standard) in 3° steps or stepless by a friction brake.

Surface treatment:

Base coat and textured varnish Standard colour RAL 7035 light grey



Example

KST	51	-U1	-M1	-F3	-LK	/	KFS 11	/	V64	/	V64.1	/	KL	/	Χ

Bas	IC	u	mi	ì

KST51	Control Unit with equipment boxes 200 x 580 mm
KST52	Control Unit with equipment boxes 270 x 580 mm
KST54	Control Unit with equipment boxes 320 x 580 mm
	Special boxes for request!

Special boxes for requi

Base unit


U1	Swiveling 90° left, 180° right with friction brake
U2	Swiveling 90° left, 180° right with detent incl. 2-step release (standard)
U3	Electric swiveling 90° left, 180° right
114	Non swiveling

Attachments

M1	Monitor mounting with monitor housing
M2	Monitor mounting with monitor mounting bracket
МЗ	Monitor mounting without monitor housing/-mounting bracket
F3	Footrest KBF/716
F4	Glass footrest version
Н	Heater 2 x 1 kW with ventilator 240V AC
LS	Manual adjustment of equipment boxes horizontal adjustable +/- 75 mm
LK	Plate for horizontal manual adjustment for control units +/- 250 mm
Label wit	hout engraving for Multi-axis-/ Single-Axis Controller
Label wit	h engraving for Multi-axis-/ Single-Axis Controller






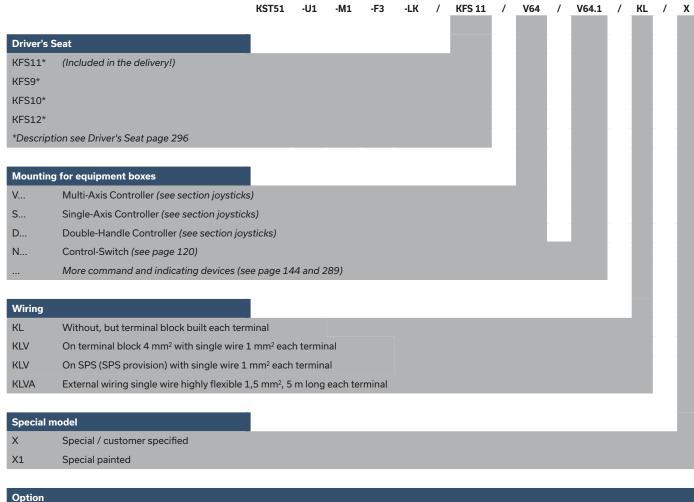





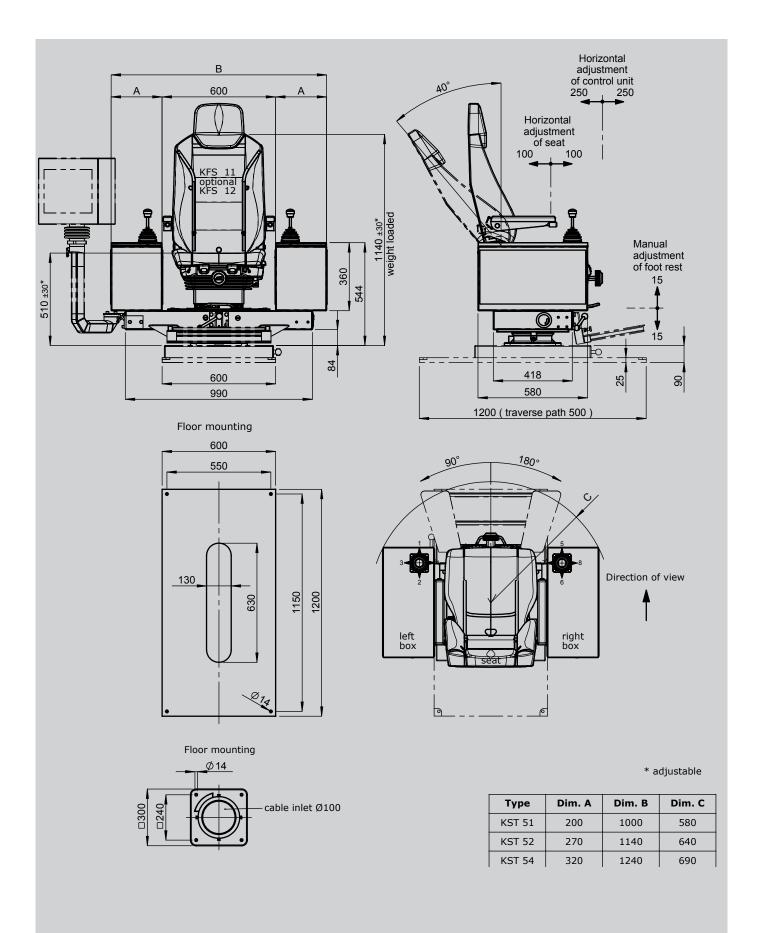

Control Unit KST 6 swiveling



GESSMANN

The KST6 is an ergonomically designed swiveling control chair which provides a high degree of comfort.

Equipment boxes:

The equipment boxes are vertically and horizontally adjustable. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is carried out through a cross-member in the traverse. (Terminal block)

Driver's Seat:

As standard the KST6 is fitted with a KFS11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the Driver's Seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. The swivel base is zero-clearance bearing and can be locked either by a detent (standard) in 3° steps or stepless by a friction brake.

Surface treatment: Base coat and textured varnish Standard colour RAL 9011 black



KST6 -U2 -M1 -F3 -LK KFS 11 / V64 / V64.1 / KL **Basic unit** KST6 Control Unit with equipment boxes Base unit U1 Swiveling 90° left, 180° right with friction brake Swiveling 90° left, 180° right with detent incl. 2-step U2 release (standard) U3 Electric swiveling 90° left, 180° right U4 Non swiveling U5 Without base frame **Attachments** M1 Monitor mounting with monitor housing M2 Monitor mounting with monitor mounting bracket М3 Monitor mounting without monitor housing/-mounting bracket F3 Footrest KBF/716 F4 Glass footrest version Н Heater 2 x 1 kW with ventilator LK Plate for horizontal manual adjustment for control units +/- 250 mm **Driver's Seat** KFS11* (Included in the delivery!) KFS9* KFS10* KFS12*

Example

*Description see Driver's Seat page 296






		KST6	-U2	-M1	-F3	-LK	/	KFS 11	/	V64	/	V64.1	/	KL	/	X
Mounti	ng for equipment boxes										-					
V	Multi-Axis Controller (see section joysticks)															
S	Single-Axis Controller (see section joysticks)														
D	Double-Handle Controller (see section joyst	icks)														
N	Control-Switch (see page 120)															
	More command and indicating devices (see	page 1	44 and 2	289)												
Wiring																
KL	Without, but terminal block built each termi	nal														
KLV	On terminal block 4 mm² with single wire 1 i	mm² ead	ch termi	nal												
KLV	On SPS (SPS provision) with single wire 1 m	ım² eacl	n termin	al												
KLVA	External wiring single wire highly flexible 1,5	5 mm², 5	m long	each te	rminal											
Special	model															
Х	Special / customer specified															
X^2	Special painted															

Option





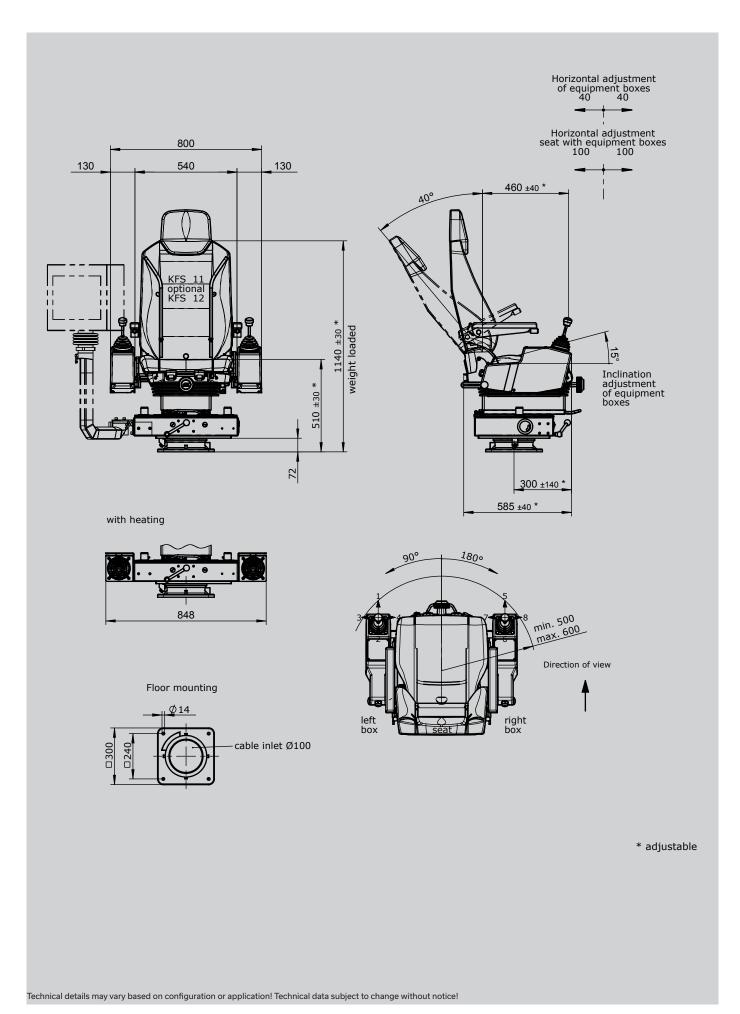

Control Unit KST 8 swiveling



GESSMANN

The KST8 is an ergonomically designed swiveling control chair which provides a high degree of comfort.

Equipment boxes:

The equipment boxes are vertically and horizontally adjustable. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is carried out through a cross-member in the traverse. (Terminal block)

Special boxes available upon request.

Driver's Seat:

As standard the KST8 is fitted with a KFS11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross member with swivel base:

The cover of the sheet steel cross-member including the Driver's Seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. The swivel base is zero-clearance bearing and can be locked either by a detent (standard) in 3° steps or stepless by a friction brake.

Surface treatment: Base coat and textured varnish Standard colour RAL 9011 black



V64

V64.1

		Example					
KST8	-U1	-M1	-F3	-LK	/	KFS 11	/

Basic u	nit
KST8	Control Unit with equipment boxes
Base ur	nit
U1	Swiveling 90° left, 180° right with friction brake
U2	Swiveling 90° left, 180° right with detent incl. 2- (standard)
U3	Electric swiveling 90° left, 180° right
U4	Non swiveling
U5	Without base frame
Attachr	nents
M1	Monitor mounting with monitor housing
M2	Monitor mounting with monitor mounting brack
M3	Monitor mounting without monitor housing/-m
F3	Footrest KBF/716
F4	Glass footrest version
Н	Heater 2 x 1 kW with ventilator
LK	Plate for horizontal manual adjustment of contr
Driver's	: Seat
KFS11*	(Included in the delivery!)
KFS9*	
KFS10*	
KFS12*	
*Descri	otion see Driver's Seat page 296

Technical details may vary based on configuration or application! Technical data subject to change without notice!





KST8 -U1 -M1 -F3 -LK / KFS11 / V64 / V64.1 / KL / X

Mounting for equipment boxes

- V... Multi-Axis Controller (see section joysticks)
- S... Single-Axis Controller (see section joysticks)
- D... Double-Handle Controller (see section joysticks)
- N... Control-Switch (see page 120)
- ... More command and indicating devices (see page 144 and 289)

Wiring


- KL Without wiring, but terminal block built each terminal
- KLV On terminal block 4 mm² with single wire 1 mm² each terminal
- KLV On SPS (SPS provision) with single wire 1 $\,\mathrm{mm^2}$ each terminal
- KLVA External wiring single wire highly flexible 1,5 mm², 5 m long each terminal

Special model

- X Special / customer specified
- X² Special painted

Option



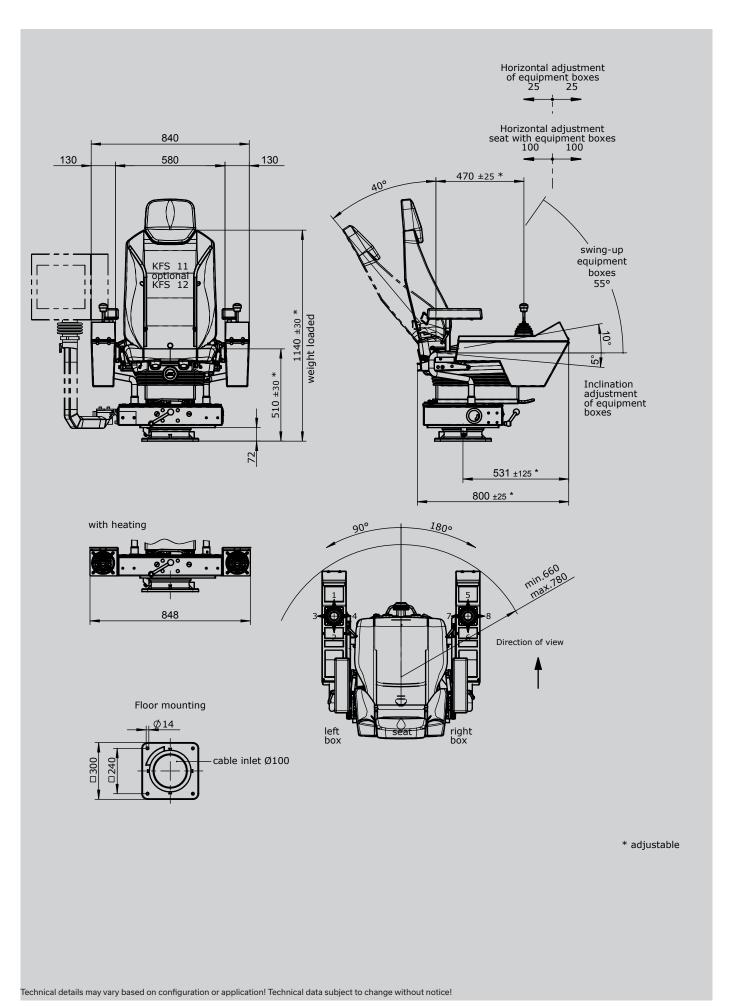

Control Unit KST 85



GESSMANN

The KST85 is an ergonomically designed swiveling control chair which provides a high degree of comfort.

Equipment boxes:

The equipment boxes are vertically and horizontally adjustable. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is carried out through a cross-member in the traverse. (Terminal block)

Special boxes available upon request.

Driver's Seat:

Heating console:

Cover with 2 steps heating (2x2kW 400V AC) with integrated ventilator. The cover of the heating cover can be tilted forward to reach the terminal block of the heating and cable execution.

Surface treatment:


Base coat and textured varnish Standard colour RAL 9011 black



		KST85	Example -M1	/	KFS14	/	V64	/	V64.1	/	KL	/	X
Basic un	it												
KST85	Control Unit with heating in the console base												
KST87	Control Unit with console base without heating												
Attachm	ents												
M1	Monitor mounting with monitor housing												
M2	Monitor mounting with monitor mounting bracket												
M3	Monitor mounting without monitor housing/-mountin	g bracket	t										
Driver's	Seat												
KFS14*	(Included in the delivery!)												
Mounting	g for equipment boxes												
V	Multi-Axis Controller (see section joysticks)												
S	Single-Axis Controller (see section joysticks)												
D	Double-Handle Controller (see section joysticks)												
N	Control-Switch (see page 120)												
	More command and indicating devices (see page 144	and 289)										
Wiring													
KL	Without wiring, but with terminal block built each term	ninal											
KLV	On terminal block 4 mm ² with single wire 1 mm ² each	terminal											
KLV	On SPS (SPS provision) with single wire 1 mm ² each to	erminal											
KLVA	External wiring single wire highly flexible 1,5 mm², 5 m	n long ea	ch termina	al									
Special n	nodel												
Χ	Special / customer specified												
X ²	Special painted												





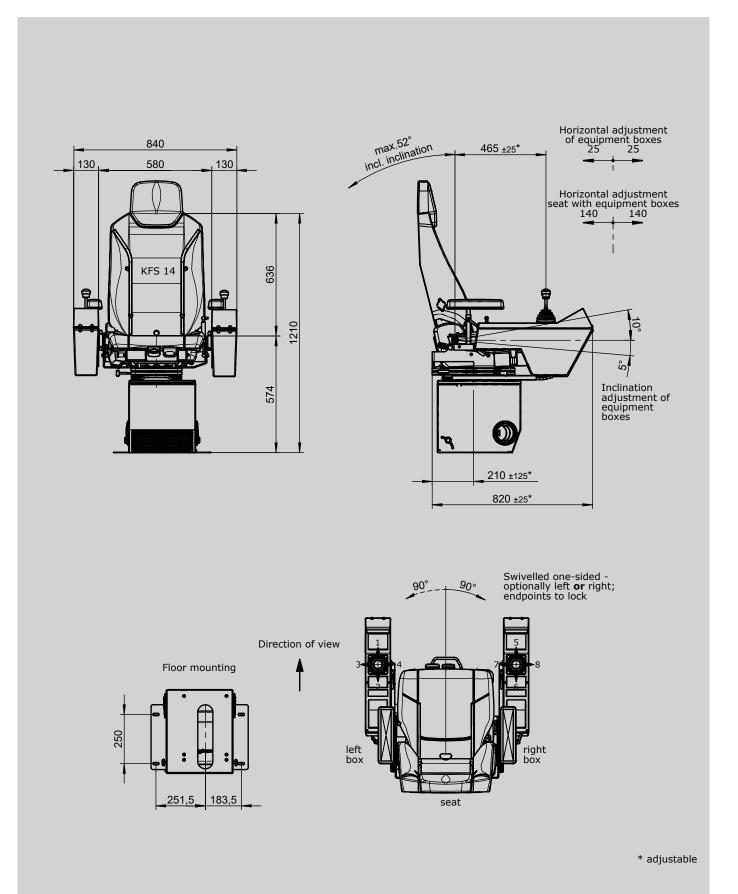

V2025/1 25.02.2025

Control Unit





The KST7 is an ergonomically designed swiveling control chair which provides a high degree of comfort.

Equipment boxes:

The equipment boxes are made from sheet steel and as standard have a hinged lid with locking feature. This allows for easy inspection and maintenance. The side of the equipment boxes is as standard fitted with an inspection plate which again is lockable. The arrangement of the joystick, indicators and control devices is customised according to customer specifications. This combined with the custom sized and profiled equipment boxes that are available means that the KST7 is very flexible and customisable solution.

Driver's Seat:

The tipped spring mounted seat KFS4 is fit with an hydraulic vibration absorption system incl. weight adjustment. With the folding spring mounted seat you can also arrive your workplace in small cabins.


Base plate:

The cran control unit is available with or without base plate.

Surface treatment:

Base coat and textured varnish Standard colour RAL 7035 light grey



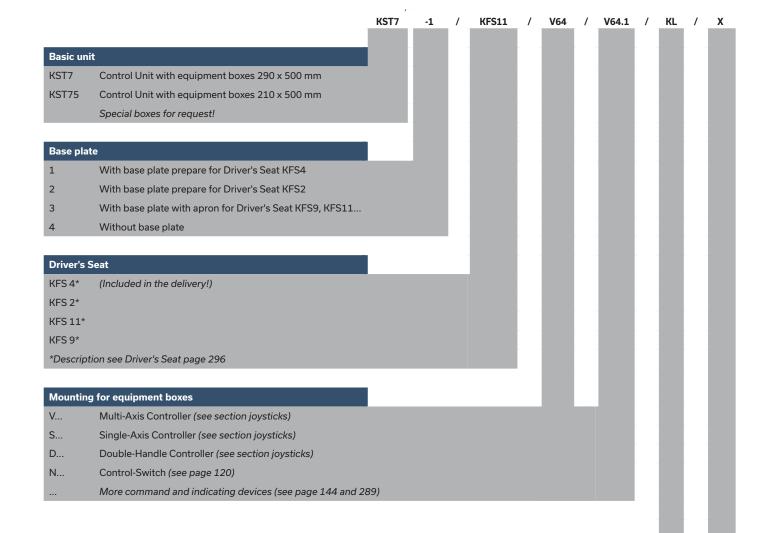





KST 7 -1 / KFS 11 / V64 / V64.1 / KL / X

Wiring

KL Without wiring, but terminal block built each terminal

KLV On terminal block 4 mm² with single wire 1 mm² each terminal

KLV On SPS (SPS provision) with single wire 1 mm² each terminal

KLVA External wiring single wire highly flexible 1,5 mm², 5 m long each terminal

Special model

X Special / customer specified


X² Special painted

Option

Radio remote control system

Control Unit



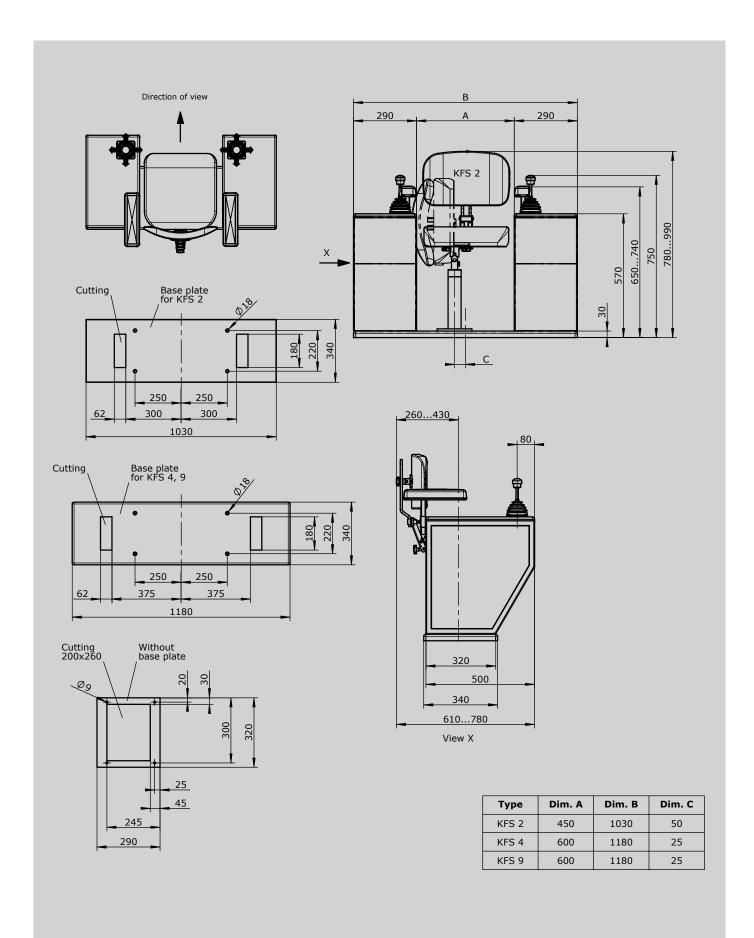

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Housing for our switching devices



Dimension outside in mm (BxLxH)	Dimension inside in mm (BxLxH)	Remarks	Weight KG	Form
Steel sheet housing material the Protection IP54 painting RAL	nickness 1/1,5 mm 7032 pebble-grey textured varnish			
200 x 200 x 92	166 x 166 x 90		1,3	B 200
230x 230 x 105	196 x 196 x 102		1,4	B 230
230 x 340 x 105	196 x 306 x 102		1,5	B 230 x 340
230 x 440 x 105	196 x 406 x 102		1,6	B 230 x 440
250 x 250 x 150	216 x 216 x 147		1,6	B 250 x 250
150 x 400 x 105	116 x 366 x 102		3,2	B 150 x 400
150 x 500 x 105	116 x 466 x 102		3,5	B 150 x 500
150 x 600 x 105	116 x 566 x 102		3,8	B 150 x 600
260 x 500 x 105	226 x 466 x 102		3,8	B 260 x 500
260 x 600 x 105	226 x 566 x 102		4,2	B 260 x 600
dimensions special		On enquiry		
Plastic housing polycarbonat Protection IP65 colour RAL 70	35 fair-grey			
120 x 122 x 105	113 x 115 x 98		0,35	l 120 x 122
120 x 160 x 140	113 x 134 x 133		0,6	I 120 x 160
160 x 240 x 120	153 x 215 x 114		0,8	l 160 x 240
160 x 360 x 100	153 x 352 x 94		1,0	I 160 x 360
230 x 300 x 110	223 x 293 x 103		1,15	I 230 x 300
Plastic housing polyester Protection IP65 colour RAL 70	000 grey			
220 x 335 x 115	200 x 292 x 108	Colour altern. RAL 9011 black	1,65	I 220 x 335
220 x 465 x 115	200 x 432 x 108	Colour altern. RAL 9011 black	2,24	I 220 x 465
250 x 255 x 120	236 x 243 x 110		2,65	l 250 x 255
250 x 400 x 120	236 x 386 x 110		3,65	I 250 x 400
250 x 600 x 120	236 x 586 x 110		5,24	I 250 x 600
Accessory parts				
Hinges each housing (2 pcs.)			0,2	
Armrest with clamp adjustable s	straps		0,5	
Cable entry M20 cable 7 - 13 mr	n	With anti-kink predection and strain relief	0,15	
Cable entry M32 cable 11 - 21 r	mm	With anti-kink predection and strain relief	0,2	
Cable entry M40 cable 19 - 28 m	nm	With anti-kink predection and strain relief	0,25	
Pillar with flange 100 x 100 x 53	5 mm high	Flange 150 x 150 mm	14,0	
Indicating labels not engraved for	or Multi-axis / Single-Axis Controller			
Indicating labels with engraving	for Multi-axis / Single-Axis Controller	Character		

Attachment for Control Unit, portable control units and housings



Command and indicating devices 22 mm	Contact- complement	Weight KG	Туре	
Push button		15	0,040	D
Selector switch 0-1	2 positions	15	0,050	W
Selector switch 1-0-2	3 positions	2 S	0,060	W
Key switch 0-1	2 positions	15	0,130	S
Key switch 1-0-2	3 positions	2 S	0,140	S
Mushroom key switch latching		15	0,080	PS
Mushroom head push button latching		1 Ö	0,060	PV
Illuminated push button diode 24 V DC/AC		15	0,040	LD
Illuminated push button diode 230 V AC		1S+1Ö	0,040	LD
Indicator light diode 24 V DC/AC			0,040	L
Indicator light diode 230 V AC			0,040	L
Coordinate switch 2 positions horizontal T-C	D-T 3SU1030-7AC10	2 S	0,102	К
Coordinate switch 2 positions vertical T-O-T	3SU1030-7AD10	2 S	0,102	К
Coordinate switch 4 positions T-O-T / T-O-T	3SU1030-7AF10	4 S	0,112	К
Switching element in addition		1S + 1Ö	0,010	
Other command and indicating devices				
Summer			0,250	
Knee button FAK-S/KC/I		1S+1Ö	0,350	
Foot button		1S+1Ö	0,450	

Attachments

Drilling 22 mm

Blind plug 22 mm

Cutouts for display devices

Microphone with gooseneck

Power supply 230 V/24 V DC for Driver's Seat

Power supply 230V/12VDC, 324W (20204578)

Profinet switch



Customer Order No. Equipment box left Pos. Туре Colour Label text (max. Plant Desti-Notes No. 2 x 12 characters ref. nation 1 2 3 4 5 6 1 (8) 2 7 (9) (10) (15) (20) 8 (21) 9 10 (18) 11 (14) (19) 12 13 14 15 16 Maximum installation of command and indicating devices 22 (see p.144 & 288) 17 in our control units and housings if our Multi-Axis Controllers V62 (see p.74) are used. Additional command and indicating 18 devices can be installed of Multi-Axis Controllers V64 or V11 (see p.74 or p.91) are 19 used. (please enquire) 20 21 22 23 24 Control unit (see p. 253) No. of pieces max. Type KST3 1 - 6, 8 - 13, 15 - 18 16 KST41/181 1 - 5, 10 - 12 8 KST42/182 1 - 5, 8 - 12, 15 - 17 13 KST51/122 3 - 7, 10 - 14, 15 - 19, 20 - 24 20 KST52/53/54/152/154 1 -24 24 KST6 3 - 4, 10 - 11, 15 - 16 6 KST7 1 - 24 24 KST75 1 - 19 19

Technical details may vary based on configuration or application! Technical data subject to change without notice!



Customer			Order No.			,	
Pos. No.	Туре	Colour	Label text (max). 2 x 12 characters	Plant ref.	Desti- nation	Notes	Equipment box right
1							
2							
3							5
4							$\left(7 \stackrel{\wedge}{\longleftrightarrow} 8\right)$
5							
6							
7							
8							33 26
9							44 39 34 27
10							45 40 35 28
11							46 41 36 29
12							47 42 37 30 48 43 38 31
13							(48) (43) (38) (31)
14							
15							
16							
17							Maximum installation of command and indicating devices 22 (see p.144 & 288)
							in our control units and housings if our Multi-Axis Controllers V62 (see p.74) are used. Additional command and indicating
18							devices can be installed of Multi-Axis Controllers V64 or V11 (see p.74 or p.91) are
19							used. (please enquire)
20							
21							
22							
23							
24							
						No. of pieces max.	Control unit (see p.253) Type
25 - 30, 32	- 37, 39 - 42					16	KST3
25 - 29, 34	- 36					8	KST41/181
25 - 29, 32	- 36, 39 - 41					13	KST42/182
27 - 31, 34	- 38, 39 - 43,	14 - 48				20	KST51/122
25 - 48						24	KST52/53/54/152/154
27 - 28, 34	- 35, 39 - 40					6	KST6
25 - 48						24	KST7
25 - 43						19	KST75

 $Technical\ details\ may\ vary\ based\ on\ configuration\ or\ application!\ Technical\ data\ subject\ to\ change\ without\ notice!$

KST8, 85



Customer Order No. Pos. Equipment box left Type Colour Plant Desti-Lable text (max). Notes 2 x 12 characters ref. nation No. Max. 6 pcs. 1 installation of command and indicating (3) (5) devices 22 (see p.144 & 288) or 3 4 6 1 pcs. monitoring device 72 x 72mm 4 5 Multi-Axis Controller V64 (see 6 p.74) or V11 (see p.91) 7 8 Max. 3 pcs. 9 installation of command and indicating devices 22 (see p.144 & 288) Place to put on 12 devices Equipment box right Max. 6 pcs. 13 installation of command 14 and indicating 17) devices 22 (see p.144 & 288) or 15 (18) 1 pcs. monitoring device 72 x 72mm 16 17 Multi-Axis Controller V64 (see 18 p.74) or V11 (see p.91) 19 20 (19) (20) (21) Max. 3 pcs. 21 installation of command 22 and indicatin devices 22 (see p.144 & 288) 23 Place to put on 24 devices

KST₁₀



Equipment box left							
Equipment box left			Type	Colour	Label text (max. 2 x 12 characters		Notes
		1					
	Max. 3 pcs.	2					
1 2 3	installation of command and indicating devices 22 (see p.144 & 288) Multi-axis Controller V11, V14, V25, V85 Max. 3 pcs. installation of command and indicating devices 22 (see p.144 & 288) Max. 3 pcs. installation of command and indicating devices 22 (see p.144 & 288) Multi-axis Controller V11, V14, V25, V85	3					
	devices 22 (see p.144 & 288)	4				 	
		5					
	Adolist and a	6					
3 4	Controller V11,	7					
	installation of command and indicating devices 22 (see p.144 & 288) Multi-axis Controller V11, V14, V25, V85 Max. 3 pcs. installation of command and indicating devices 22 (see p.144 & 288) Max. 3 pcs. installation of command and indicating devices 22 (see p.144 & 288) Multi-axis Controller V11, V14, V25, V85	8				 	
		9					
4 5 6							
	installation of command and indicating devices 22 (see p.144 & 288) Multi-axis Controller V11, V14, V25, V85 Max. 3 pcs. installation of command and indicating devices 22 (see p.144 & 288) Max. 3 pcs. installation of command and indicating devices 22 (see p.144 & 288) Multi-axis Controller V11, V14, V25, V85					 	
	indicating						
	devices 22 (see p.144 & 288)					 	
		Pos. Type Colour Label text (max. Plant nation 1					
Equipment box right							
		13				 	
		14					
10 (11) (12)	command and	15					
	devices 22 (see	15					
	p.144 & 288)	16				 	
		17					
5		10					
$(7 \longleftrightarrow 8)$		18				 	
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	Controller V11, V14, V25, V85						
13 14 15	Multi-axis Controller V11, V14, V25, V85 Max. 3 pcs. installation of command and indicating devices 22 (see p.144 & 288) Max. 3 pcs. installation of command and indicating devices 22 (see p.144 & 288) Multi-axis Controller V11, V14, V25, V85 Max. 3 pcs. installation of command and indicating devices 22 (see p.144 & 288)					 	
	installation of command and indicating						

KST19



Order No. Customer Pos. Label text (max. 2 x 12 characters Plant-ref. Equipment box left Colour Desti-Type Notes No. nation Multi-Axis Controller V11, V14, V25, V85 1 2 max. 7 installations of command and indicating devices 22 (see p.144 & 288) 3 4 5 6 7 8 9 Equipment box right Multi-Axis Controller V11, V14, V25, V85 25 26 max. 7 installations of command and indicating devices 22 (see p.144 & 288) 27 28 29 30 31

KST30



No. 2 x 12 characters ref. nation 1 2 3 4 5 6 7 8 9 10 11	Customer		_	Order No.				
1 3 4 5 6 7 8 9 10 4 5 6 11	Equipment box left	No.	Туре	Colour	Lable text (max). 2 x 12 characters	Plant ref.	Desti- nation	Notes
3 4 5 6 11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1								
5 6 7 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	1							
1 2 3 9 10 4 5 6	$\begin{pmatrix} 3 & \downarrow & 4 \end{pmatrix}$							
7 8 9 4 5 6								
① ② ③ 9	2							
(4 (5 (6) 11 — — — — — — — — — — — — — — — — — —		8						
<u>(4) (5) (6)</u>	1 2 3							
	4 5 6							
12								
13								
14 15								
16								
17		17						
18								
19								
21								
22		22						
23								
24								
26 — — — — — — —								
		27						
8 14 20 26 33 39 29								
9 15 21 27 33 39 31 31 31	9 15 21 27 33 39							
(1) (6) (2) (2) (3) (4)	10 16 22 28 34 40	32						
① ① ② ③ ④ ①	11) (7) (3) (29) (35) (41)							
(2) (3) (3) (4)	12 18 24 30 36 42							
36								
37	-	37						
38								
39 40					-			·
41								
42		42						
Maximum occupancy of the various control stations		tations			<u> </u>			
	Form	Pos.						No. of pieces max.
KST3011 1 - 24 24								
KST3031 1-36 36 KST3041 1-42 42								

KST30







The Driver's Seat KFS12 is ergonomically designed and provides a high grade of comfort. The Driver's Seat is equipped with an air-sprung vibration system. The weight adjustment is infinitely. Heated seats 24V, lumbar support, seat cushion adjustment, seat allocation recognition and headrest are included in the standard delivery. All adjustment controls are positioned ergonomically within easy access. The metal parts are protected against corrosion and painted black.

Technical data:


Suspension stoke	80 mm
Weight adjustment	50 - 150 kg
Horizontal adjustment	200 mm
Inclination of the backrest	-12°/+40°
Slope adjustment	-2°/+14°
Height adjustment	100 mm
Seat cushion adjustment	60 mm



Example

	Example			
		KFS12	-A1	-S1
Basic un	it			
KFS12	Driver's Seat with textile cover black			
Attachm	nents			
A1	Armrest adjustable (2 pieces) 50 mm wide			
A2	Armrest continuously adjustable (2 pieces) 100 mm wide			
S1	Safety belt 2 point fixing (automatic)			
S3	Safety belt 2 point fixing (static)			
LK	Plate for horizontal manual adjustment of seat adjustable +/-250 mm			
C4	Loose cover for Driver's Seat KFS 11 / KFS 12			
U	Console (base)			
Z1	Mating connectors with 3 m connection cable			



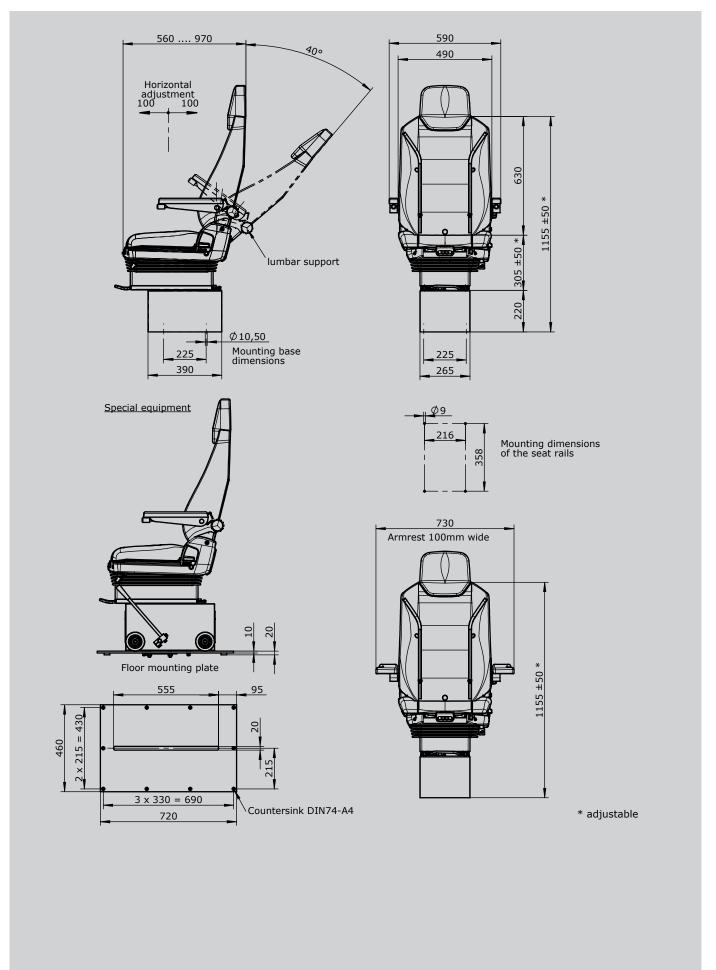





The Driver's Seat KFS11 is ergonomically designed and provides a high grade of comfort. The Driver's Seat is a low level mechanical suspension seat with an oil-hydraulic vibration absorption system with weight adjustment. All adjustment controls are positioned ergonomically within easy access. The metal parts are protected against corrosion and painted black.

Technical data

C4

U

Suspension stoke	80 mm
Weight adjustment	50 - 150 kg
Horizontal adjustment	200 mm
Inclination of the backrest	-12°/+40°
Slope adjustment	-10°/+12°
Height adjustment	65 mm




Example

		KFS11	-A1	-S1
Basic uni	t			
KFS11	Driver's Seat with textile cover black			
Attachme	ents			
К	Headrest			
A1	Armrest adjustable (2 pieces) 50 mm wide			
A2	Armrest continuously adjustable (2 pieces) 100 mm wide			
Н	Seat cushion and backrest with heating element 24V DC 75W			
S1	Safety belt 2 point fixing (automatic)			
S3	Safety belt 2 point fixing (static)			
LK	Plate for horizontal manual adjustment of seat adjustable +/-250 mm			

Loose cover for Driver's Seat KFS 11 / KFS 12

Console (base)



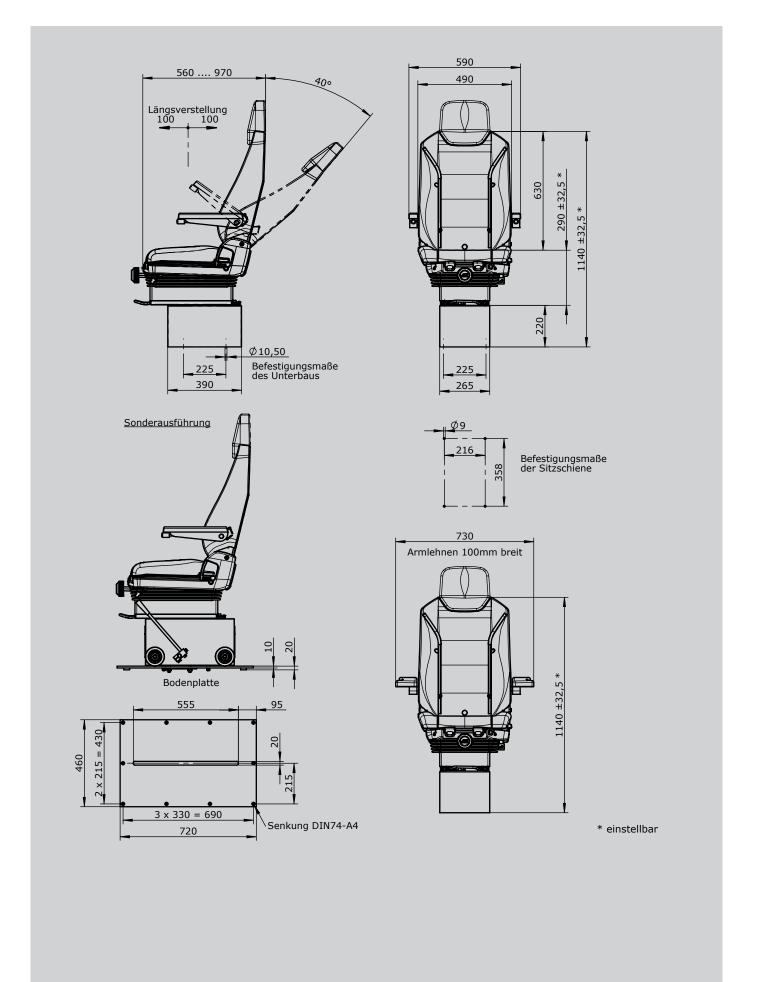



GESSMANN

The Driver's Seat KFS10 is ergonomically designed and provides a high grade of comfort. The Driver's Seat has a pneumatic vibration absorption system with weight adjustment by compressor (24V DC 8 Ampere) and a standard seat cushion V-cut. Through its three horizontal adjustment, it can be flexibly adapted to very many applications. All adjustment controls are positioned ergonomically within easy access. The metal parts are protected against corrosion and painted black.

Technical data:

Suspension stoke 80 mm

Weight adjustment 50 - 150 kg (pneumatic)

50 - 130 kg (mechanical)

Horizontal adjustment

Seat with suspension system 160 mm

Seat part individual 240 mm

Seat cushion 160 mm

Inclination of the backrest Max. 90°

Height and slope adjustment 40 mm



KFS102

-A1

-L2


-S2

-R1

Example

		111 3102	7.1	 52	-1/1
Basic uni	it	_			
KFS101	Driver's Seat with air-permeable artificial leather cover black with V-cut				
KFS102	Driver's Seat with textile cover black with V-cut				
Attachm	ents				
К	Headrest				
A1	Armrest adjustable (2 pieces) 50 mm wide				
A2	Armrest continuously adjustable (2 pieces) 100 mm wide				
L1	Lumbar support manual adjustment - 2 movement				
L2	Lumbar support manual adjustment - 4 movement				
В	Seat allocation recognition				
Н	Seat cushion and backrest with heating element 24 V DC 47W				
S1	Safety belt 2 point fixing (automatic)				
S2	Safety belt 4 point fixing (headrest required)				
S3	Safety belt 2 point fixing (static)				
U	Console (base)				
C3	Loose cover for Driver's Seat KFS10 with V-cut				
R1	Price reduction for oil-hydraulic vibration absorption system				
R2	Seat cushion without V-cut				



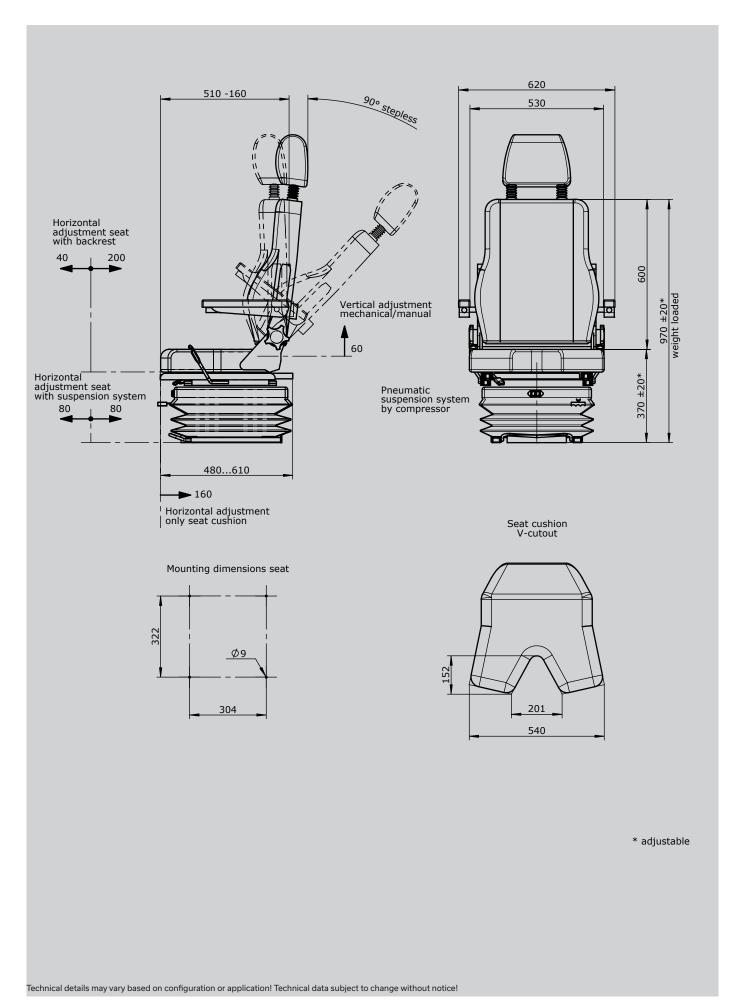





The Driver's Seat KFS9 is ergonomically designed and provides a high grade of comfort. The Driver's Seat is a low level mechanical suspension seat with an oil-hydraulic vibration absorption system with weight adjustment. Upon request, a pneumatic vibrating system with weight adjustment is available. All adjustment controls are positioned ergonomically within easy access. The metal parts are protected against corrosion and painted black.

Technical data

Suspension stoke 80 mm

Weight adjustment 50 - 150 kg (pneumatic)

50 - 130 kg (mechanical)


Horizontal adjustment 160 mm
Inclination of the backrest Max. 90°
Height and slope adjustment 60 mm



KFS 92 -A1 -L2 -S1 -P Basic unit KFS91 Driver's Seat with air-permeable artificial leather cover black KFS92 Driver's Seat with textile cover black Attachments К Headrest rain Α1 Armrest adjustable (2 pieces) 50 mm wide A2 Armrest continuously adjustable (2 pieces) 100 mm wide L1 Lumbar support manual adjustment - 2 movement L2 Lumbar support manual adjustment - 4 movement В Seat allocation recognition Н Seat cushion and backrest standard with heating element 24 V DC 47W S1 Safety belt 2 point fixing (automatic) S2 Safety belt 4 point fixing (headrest required) S3 Safety belt 2 point fixing (static) ٧ Seat cushion with V-cut (LD required!) LD Horizontal adjustment dual (seat height +30 mm!) Р Pneumatic vibration absorption system with weight adjustment (incl. compressor) LK Plate for horizontal manual adjustment of seat adjustable +/-250 mm C1 Loose cover for Driver's Seat KFS 9 C2 Loose cover for Driver's Seat KFS 9 with V-cut U Console (base)

Example



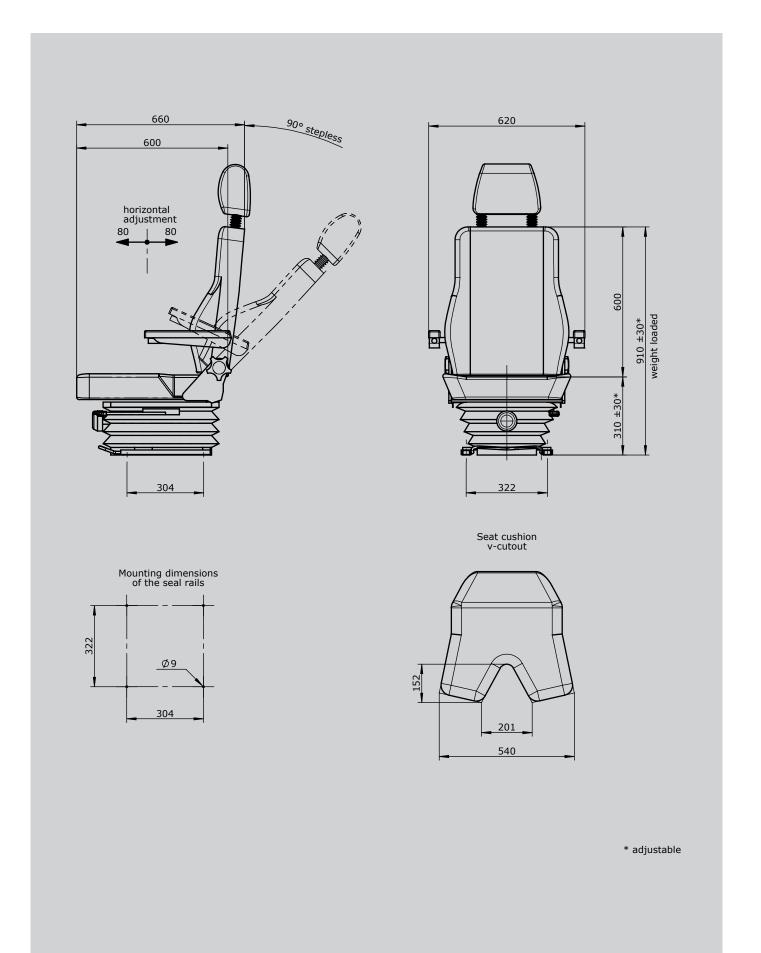





The Driver's Seat KFS14 is a static seat with ergonomically designed and provides a high grade of comfort. The Driver's Seat is equipped with roller-bearing swivel system. All adjustment controls are positioned ergonomically within easy access. The metal parts are protected against corrosion and painted black.

Technical data:


Horizontal adjustment 200 mm
Inclination of the backrest Max. 40°
Inclination of the seat surface 12°
Seat cushion height adjustment 60 mm

Rotation range -90°...0°...+90°...+180°



Example **KFS 14** -A1 -S1 -U Basic unit KFS14 Driver's Seat with textile cover black Attachments К Headrest Α1 Armrest fully adjustable (2 pieces) 50 mm wide A2 Armrest fully adjustable (2 pieces) 100 mm wide S1 Safety belt 2-point mounting (automatic) S3 Safety belt 2-point mounting (static) U Base frame (Apron)



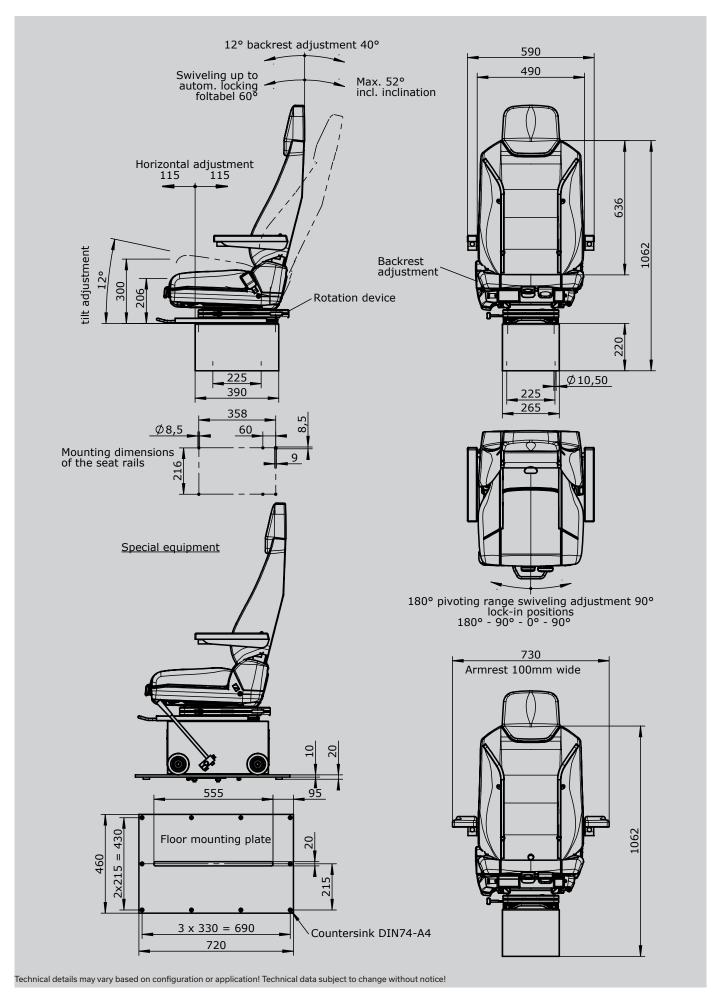



GESSMANN

The Driver's Seat KFS4 has stepless high adjustment by means of a gas-loaded spring and an oil-hydraulic vibration absorption system with weight adjustment. The backrest can be tilted, forwards into the cushion, which in turn can then be tilted 90° sideways. All functions are performed by a simple lever operation. The metal parts are protected against corrosion and painted black.

Technical data:

Suspension stoke 80 mm

Weight adjustment 50 - 130 kg

Horizontal adjustment 100 mm

Inclination of the backrest Max. 20°

Height adjustment 100 mm



Example

KFS 42 -A1

Basic unit

KFS41 Driver's Seat with air-permeable artificial leather cover black


KFS42 Driver's Seat with textile cover grey / black

Attachments

A1 Armrest fully adjustable (2 pieces) 50 mm wide

A2 Armrest fully adjustable (2 pieces) 100 mm wide



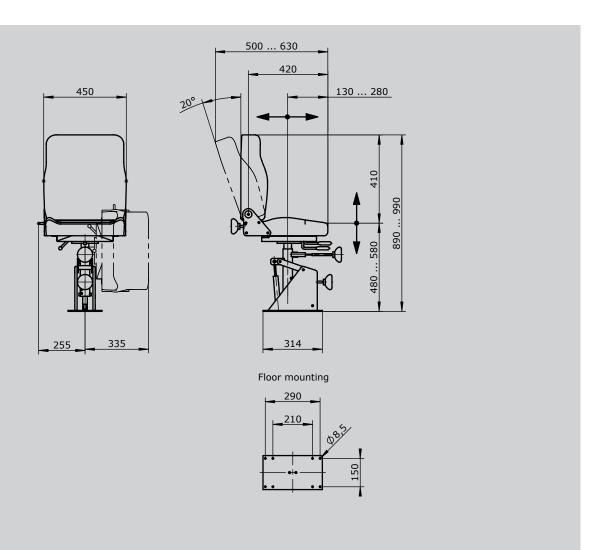

Driver's Seat





The Driver's Seat KFS2 has stepless high adjustment by means of a gas-loaded spring. The backrest can be tilted, forwards onto the cushion, which in turn can then be tilted 90° sideways. All these functions are performed easily via levers.

Technical data

Horizontal adjustment 100 mm
Inclination of the backrest Max. 10°
Height adjustment 120 mm



Example


KFS 22


Basic unit

KFS21 Driver`s Seat with air-permeable artificial leather cover black


KFS22 Driver`s Seat with textile cover grey / black



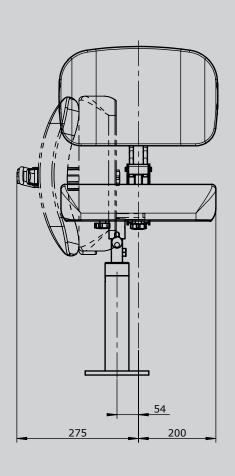

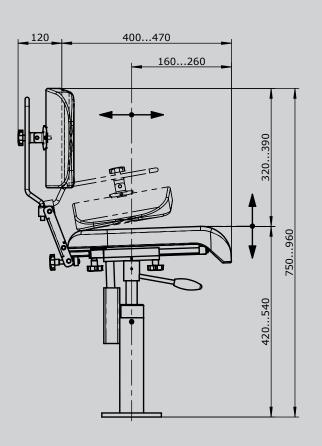

Floor mounting





GESSMANN

The Portable Control Unit TS1 is used for controlling and monitoring the necessary equipment. The chest panel and straps enable the operator to carry it without becoming tired. An adjustable carrying strap can also be fitted for use without the chest plate.

Surface treatment: Priming and structure-finishing paint Standard colour RAL 7032 pepple-grey

Technical data:

Χ

X1

X2

Special / customer specified

Housing antistatic design < 10⁹ Ohm/cm

Finishing colour yellow RAL 1021

Operation temperature -40°C to +85°C


Degree of protection IP54




Example


			TS1 -SE	31 -RH1	-КЗ -	HS 1	/ V	/	KLS	/
Basic	unit									
TS1	Portable Control Unit with	chest plate and str	aps							
TS11	Portable Control Unit with	straps								
Attach	ment							ı		
SB 1	Legs for control unit alu-tu	ube 2 pieces								
SB 2	Legs for control unit stainl	less steel-tube V2 A	A 2 pieces							
RH 1	Reeling hooks for control	unit stainless steel \	V2 A							
К1	Cable entry M32 cable 11	- 21 mm								
К2	Cable entry M40 cable 19	-28 mm								
КЗ	Cable entry 180° swiveling	g M32 cable 11-21	mm							
HS 1	Plug in socket 16-pole ma	le insert	HAN 16E witho	ut wiring						
HB 1	Connector 16-pole female	e insert	HAN 16E witho	ut wiring						
HS 2	Plug in socket 24-pole fen	nale insert	HAN 24E witho	ut wiring						
HB 2	Connector 24-pole female	einsert	HAN 24E witho	ut wiring						
HS 3	Plug in socket 32-pole ma	le insert	HAN 32E witho	ut wiring						
НВ 3	Connector 32-pole female	e insert	HAN 32E witho	ut wiring						
Indicat	ing labels not engraved for r	multi-axis-/ Single-A	Axis Controller							
Mount	ing for equipment boxes							ı		
V	Multi-Axis Controller (see	selection Joysticks))							
N	Control-Switch (see page	120)								
More o	command and indicating dev	rices (see page 144	and 289)							ŀ
Cable	and wiring									
Cable	Ölflex Classic FD 810 P	18 x 1 mm ²	13,9 mm Ø	-5°C to +70°	°C Ea	ch meter				
Cable	Ölflex Classic FD 810 P	25 x 1 mm ²	16,4 mm Ø	-5°C to +70°	°C Ea	ch meter				
Cable	Ölflex Classic FD 810 P	34 x 1 mm ²	18,9 mm Ø	-5°C to +70°	°C Ea	ch meter				
Cable	Ölflex Crane	18 x 1 mm ²	19,2 mm Ø	-25°C to +80	0°C Ea	ch meter				
Cable	Ölflex Crane	24 x 1 mm ²	22,1 mm Ø	-25°C to +80	0°C Ea	ch meter				
Cable	Ölflex Crane	36 x 1 mm ²	26,1 mm Ø	-25°C to +80	0°C Ea	ch meter				
KLS	Wired on connector / plug	g in socket per core								
	Wiring for cable per core									




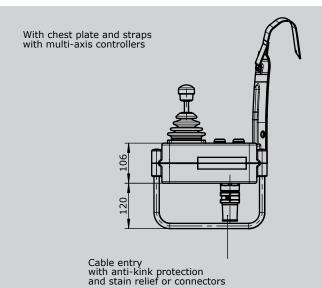

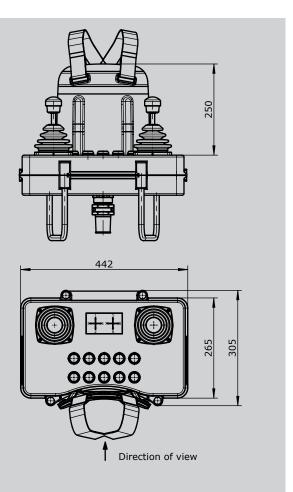

With adjustable carrying strap with multi-axis controllers









The Portable Control Unit TS2 is used for controlling and monitoring the necessary equipment. The chest panel and straps enable the operator to carry it without becoming tired. An adjustable carrying strap can also be fitted for use without the chest plate.

Surface treatment: Priming and structure-finishing paint Standard colour RAL 7032 pepple-grey

Technical data:

Operation temperature -40°C to +85°C

Degree of protection IP65





			Exam	ple								
		TS2	-SB 1	-RH 1	-К 3	-HS 1	/	V	/	KLS	/	ì
Basic u									-			ı
TS2	Portable Control Unit with chest plate, straps											ı
TS21	Portable Control Unit with straps											ı
TS22	Portable Control Unit with bracket and straps											١
Attach	ıment	1										1
SB 1	Legs for control unit alu-tube 2 pieces								-			١
SB 2	Legs for control unit stainless steel-tube V2 A 2	pieces										ı
RH 1	Reeling hooks for control unit stainless steel V2	? A										ı
К1	Cable entry M32 cable 11 - 21 mm											l
К2	Cable entry M40 cable 19 - 28 mm											l
К3	Cable entry 180° swiveling M32 cable 11-21 m	m										l
HS 1	Plug in socket 16-pole male insert	HAN 16E	without wi	ring								ı
HB 1	Connector 16-pole female insert	HAN 16E	without wi	ring								ı
HS 2	Plug in socket 24-pole female insert	HAN 24E	without wi	ring								ı
HB 2	Connector 24-pole female insert	HAN 24E	without wi	ring								ı
HS 3	Plug in socket 32-pole male insert	HAN 32E	without wi	ring								ı
HB 3	Connector 32-pole female insert	HAN 32E	without wi	ring								ı
Indicat	ing labels not engraved for multi-axis-/ Single-Axi	s Controlle	er									ı
Indicat	ing labels engraved for multi-axis-/ Single-Axis Co	ontroller										ı
												ı
	ing for equipment boxes											ı
V	Multi-Axis Controller (see selection Joysticks)											ı
S	Single-Axis Controller (see selection Joysticks)											
N	Control-Switch (see page 120)											ı
More c	command and indicating devices (see page 144 ar	nd 289)										




			TS 2	-SB 1 -RH 1	-K 3 -HS 1	/	V	/	KLS	/	_
Cable	and wiring										
	e Oelflex Classic FD 810 P	18 x 1 mm ²	13,9 mm Ø	-5°C to +70°C	Each meter						
Cable	e Oelflex Classic FD 810 P	25 x 1 mm ²	16,4 mm Ø	-5°C to +70°C	Each meter						
Cable Oelflex Classic FD 810 P		34 x 1 mm ²	18,9 mm Ø	-5°C to +70°C	Each meter						
Cable	Ölflex Crane	18 x 1 mm ²	19,2 mm Ø	-25°C to +80°C	Each meter						
Cable	Ölflex Crane	24 x 1 mm ²	22,1 mm Ø	-25°C to +80°C	Each meter						
Cable	Ölflex Crane	36 x 1 mm ²	26,1 mm Ø	-25°C to +80°C	Each meter						
KLS	Wired on connector / plug in										
KLK	Wiring for cable per core										
Spec	ial model										
Χ	Special / customer specified	I									
X1	Housing antistatic design <										
X2	Finishing color yellow RAL 1	.021									




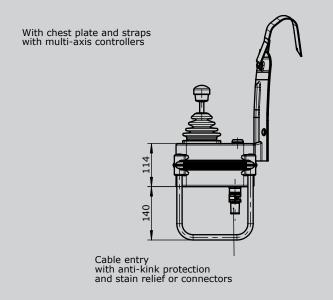


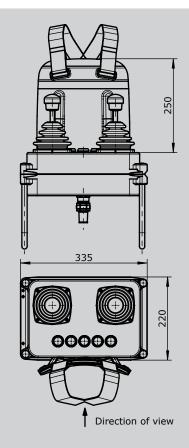



With bracket and cable entry swivelling with multi-axis controllers



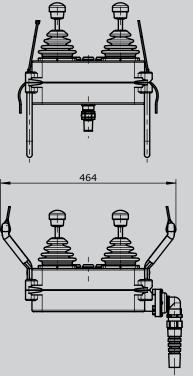





The Portable Control Unit TS3 is used for controlling and monitoring the equipment. The abdominal belt enable the operator to carry it without becoming tired. The equipment can be individually designed.

Surface treatment: Priming and structure-finishing paint


Standard colour RAL 7032 pepple-grey

Technical data:


Operation temperature -40°C to +85°C

Degree of protection IP65



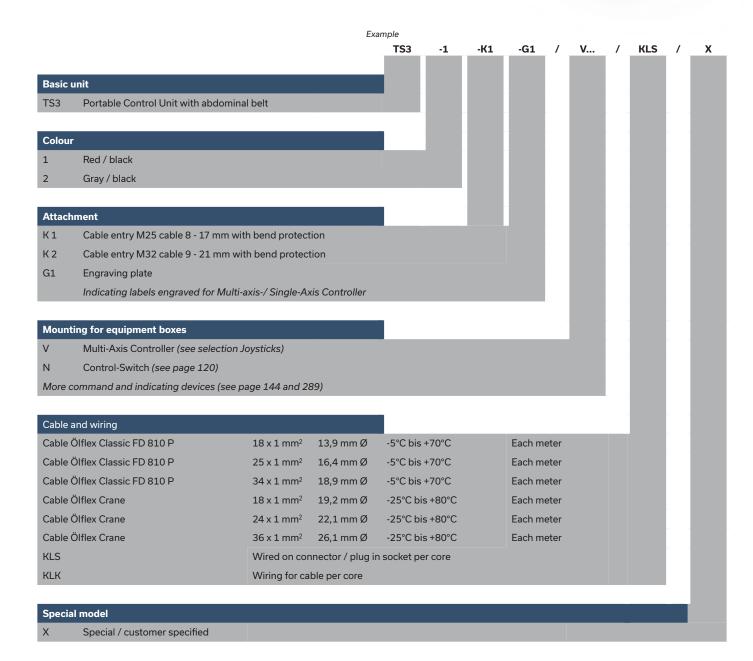



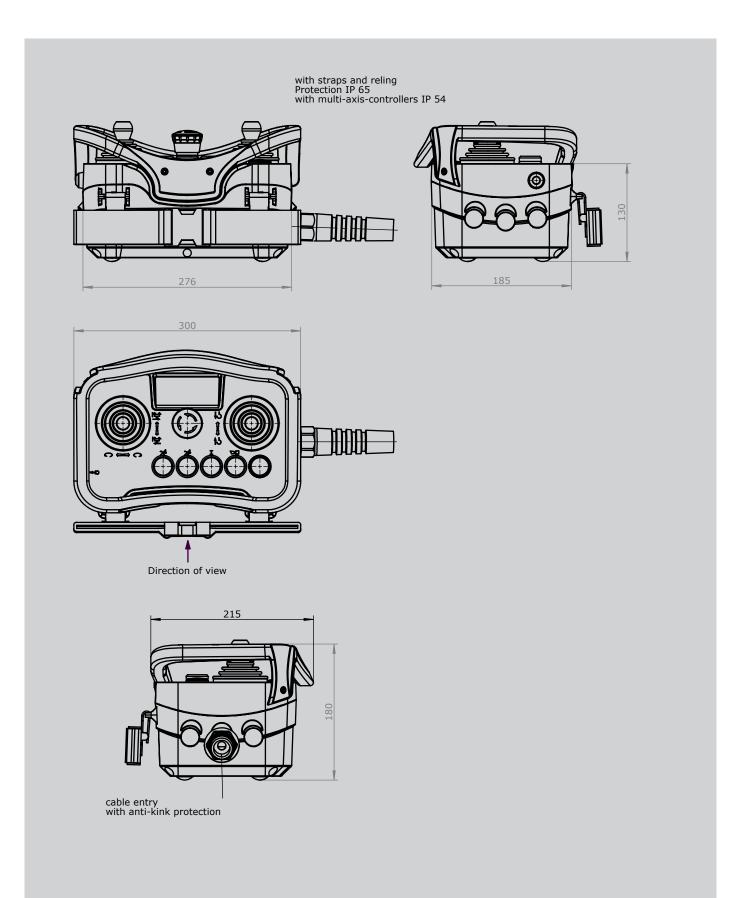

Signal-Cam Controller NU1




The Signal-Cam Controller NU 1 is used as a signal and annunciation switch in HV systems. This rugged switching device has cam discs made of insulation material that can be set at 10° intervals. The Signal-Cam Controllers are designed to permit series assembly, which can be operated simultaneously.

Technical data


Mechanical life NU1 2 million operating cycles Operation temperature -40°C to +85°C IP40 / IP65 with aluminium housing Degree of protection NO Switching capacity NC Time constant 250 V DC 20 ms 2A 1A 20 ms 125 V DC 4A ЗА 50 V DC 6A 6A 20 ms 30 V DC 10A 10A 20 ms 250 V DC15 6A 6A



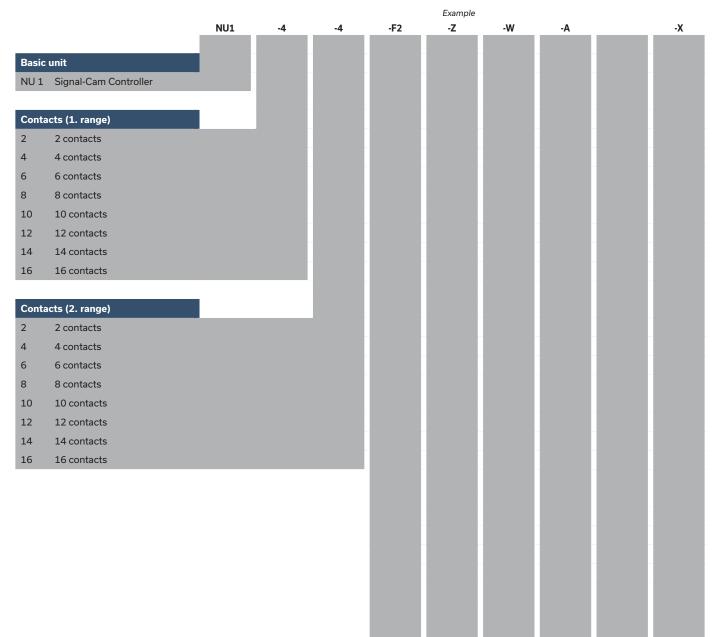


Signal-Cam Controller NU1




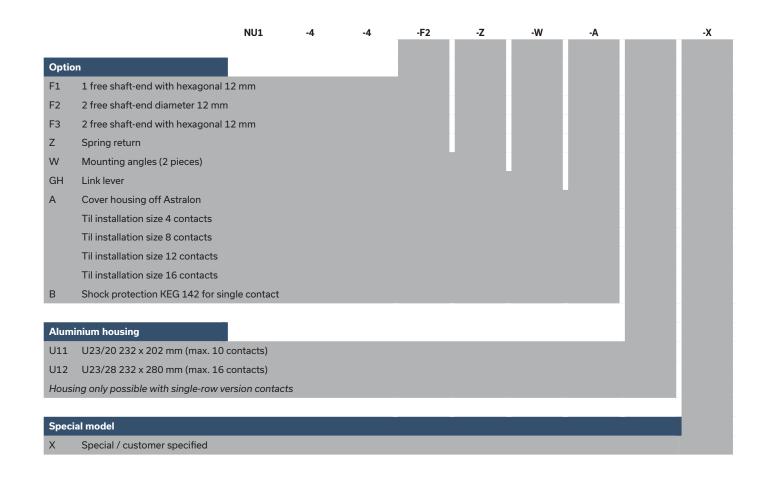

Signal-Cam Controller NU1




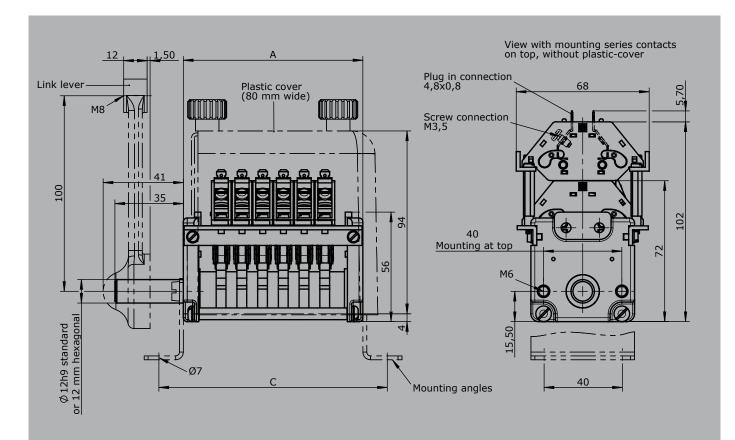





Aluminuim housing protection IP 65

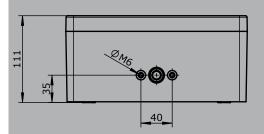

Туре	No. of contacts	Dim. A	Dim. C	Housing	Dim. F	Dim. G
2	2	7	74			
4	4	70	95			
6	6	91	117	U 23/20	180	202
8	8	113	138			
10	10	134	159			
12	12	155	180			
14	14	176	201	U 23/28	260	280
16	16	197	222			

Technical details may vary based on configuration or application! Technical data subject to change without notice!

DC Contact SO 1.10 Normally closed SS 1.10 Normally open



The DC Contact is used for signalling and annunciation applications. The snap-action mechanism prevents slow contact opening when the plunger is operated slowly. Quenching of the arc that occurs with DC is supported by two-capacity permanent magnets.

These are arranged so that the polarity can be ignored when connecting +/- cabling. However, the polarity of the quenching magnets must be noted when installing the contacts to prevent the magnets adversely affecting each other. Contacts in four different colours are available for polarity identification of the magnets when fitted.

The contact may only be installed on non-magnetisable materials with screw, etc. made of non-ferrous metal.

The self-cleaning silver contacts are designed for low switching frequency, low currents and voltages. Gold coated contacts can be supplied (approx 0.2μ), less than 42 Volt required. The screw connection M3.5 at the side is suitable for 2 conductors max. $2.5~\text{mm}^2$. The plug-in connection at the top $4.8\times0.8~\text{mm}$ DIN 46247.

Several contacts can be plugged on the top of each other and operated jointly. The plug-type terminals are then only accessible on the top unit. The contacts can be provided with shock protection to DIN VDE 0106 Part 100.



	Switching capacity		
	NC	NO	Time constant
250 V DC	2A	1A	20 ms
125 V DC	4A	3A	20 ms
50 V DC	6A	6A	20 ms
30 V DC	10A	10A	20 ms
250 V AC 15	6A	6A	

Technical data

Mechanical life 2 million operating cycles

Electrical service life 50.000 operating cycles (at 2A 250 V DC L/R 20 ms)


Operation temperature -40°C to +85°C

Degree of protection IP40

		SO 1.10	-В	-R	-F	-X
		_				
Basic ur	nit					
SO1.10	DC-Contact normally closed (NC)					
	Colour code grey or blue					
SS1.10	DC-Contact normally open (NO)					
	Colour code yellow or green					
Attachm	nent					
В	Shock protection KEG 142 to DIN VDE 0106 part 100					
R	Roller lever					
К	Toggle lever (switching is one direction only)					
F	Plug-in connection at side 4,8 x 0,8 mm (2 pieces)					
AU	Contacts gold-coated approx. 0,5					
Special	model					
Χ	Special / customer specified					
X1	Contact without quenching magnets					

DC Contact SO 1.10 Normally open SS 1.10 Normally closed



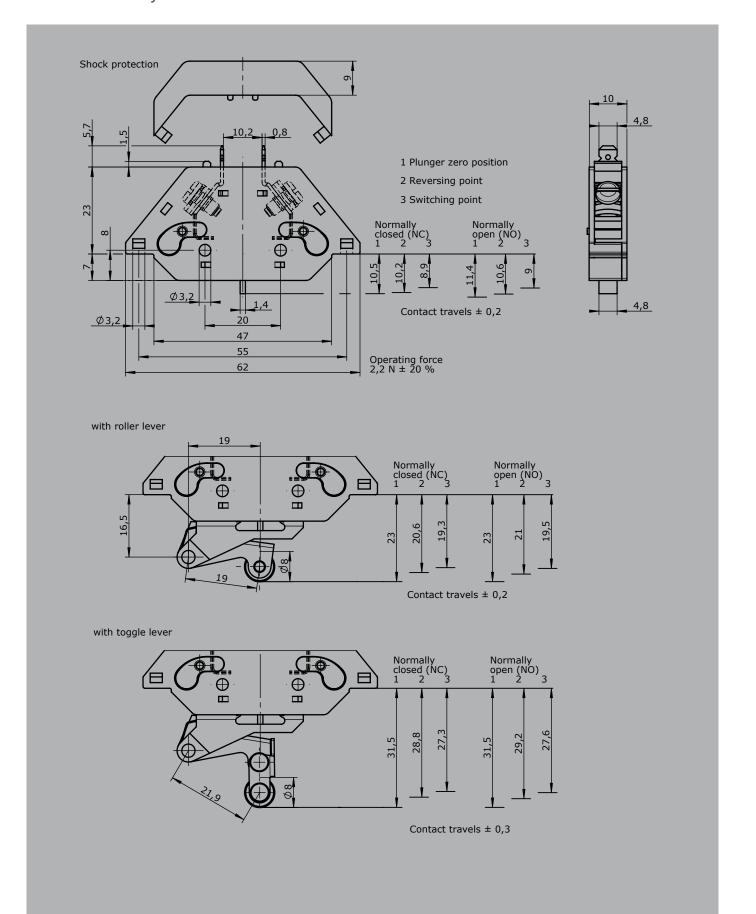

Gear Limit Switch





The Gear Limit Switch GE1 / GE2 is a rugged switching device designed for hoisting applications. The modular micro changeover contacts with positive opening operation. The device is programmed by means of stepless adjustment of double cam discs, which can be provided from 18° to 192° contact discs according to the switching program required. The type GE 1 (standard) includes a double cam disc conjointly lockable. The type GE 2 (standard) includes a double cam disc conjointly lockable.

Technical data

Mechanical life GE1/GE2 10 million operating cycles


Operation temperature -40°C to +85°C

Degree of protection IP65

Colour RAL 7032 pebble grey

Contact complement 2 A 250 V AC oder 3 A 24 V DC 13



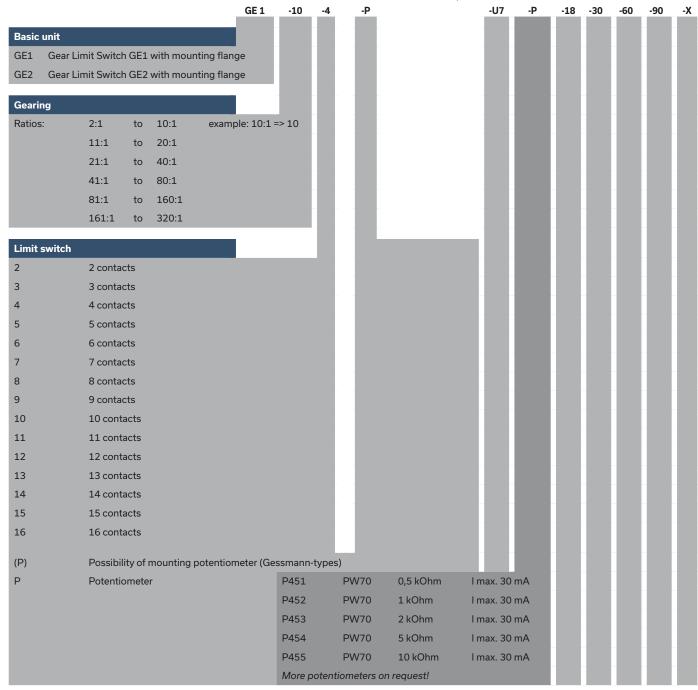

Gear Limit Switch



-30

-60

-90

-X

-18

-U7

Aluminium housing

U17/13 170 x 130 mm (max. 8 contacts GE 1)

U6 U16/16 160 x 160 mm (max. 12 contacts GE 1/ max. 6 contacts GE 2)

GE 1

-10

U7 U16/20 160 x 200 mm (max. 16 contacts GE 1/max. 10 v GE 2)

U8 U16/26 160 x 260 mm (max. 16 contacts GE2)

U9 U16/35 160 x 350 mm

Program-disc

Following program-discs are available:

18°, 24°, 30°, 36°, 45°, 60°, 75°, 90°, 110°, 120°, 176°, 192°

Example:


Contact 1: program-discs pair 18° (adjustment range 18°-36°)

Contact 2: program-discs pair 30° (adjustment range 30°-60°)

Contact 3: program-discs pair 60° (adjustment range 60°-120°)

Contact 4: program-discs pair 90° (adjustment range 90°-180°)

Contact n:

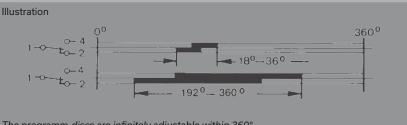


The programm-discs are infinitely adjustable within 360°

Special model

Special / customer specified

Gear Limit Switch GE1 / GE2



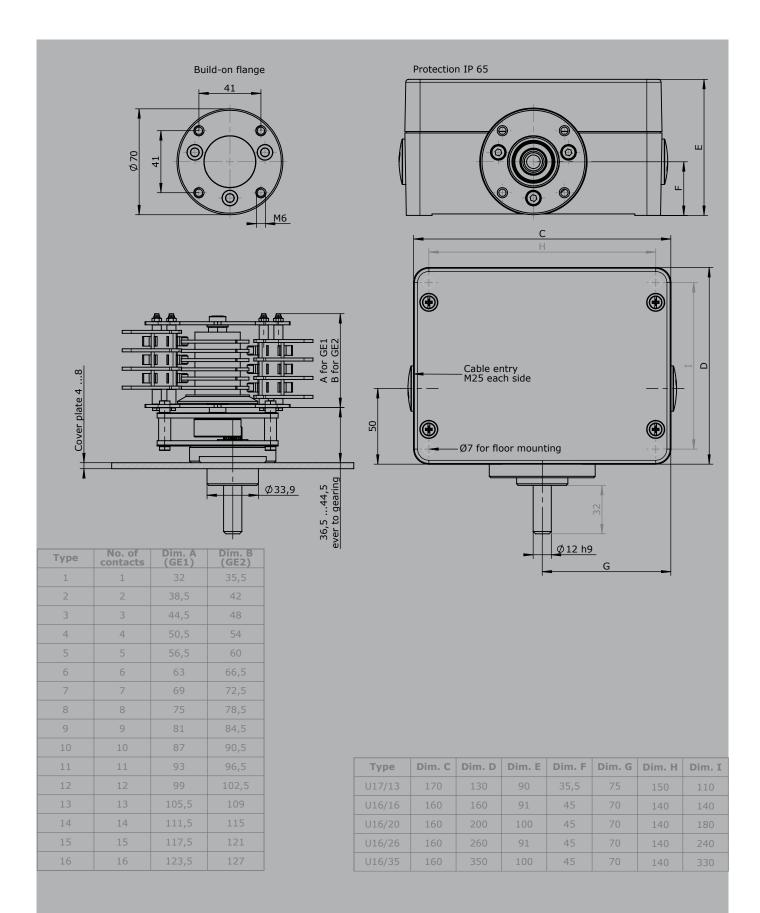

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Naval Cruise Controller





The Naval Cruise Controller AZ1 is a rugged switching device. The modular design enables the switching device to be used universally.

The design includes:

The mechanical control-system for the engine speed 0-max. rpm. switching angle 60 degrees with pressure print at 7 degrees and friction brake direction 0-2. The mechanical control-system for the steering left/right direction 13-14, 360 degrees with pressure points 4x90 degrees and friction brake.

The AZ1 is resistant to oil, maritime climate, ozone and UV radiation.

Technical data

Mechanical life AZ1 12 million operating cycles

Operation temperature -40°C to +85°C


Degree of protection IP66



	AZ1	-L	E2112	-X
Basic unit	-			
AZ1 Naval cruise controller	_			
Options				
L Scale illuminated (LED) 24 V dimmable				
Interface				
Voltage output (not stabilized)				
Supply voltage 4,75 - 5,25 V DC				
	Characteristic: 1 = Inverse dual, 2 =	Dual		
0,52,54,5 V redundant per axis	2 axis	2		
Voltage output				
Supply voltage 9 - 32 V DC (*11,5 - 32 V DC)				
	Characteristic: 1 = Inverse dual, 2 =	Dual		
0,52,54,5 V redundant per axis	2 axis	2		
Output power				
Supply voltage 9-32 V DC				
	Characteristic: 1 = Inverse dual, 2 =	Dual		
41220 mA redundant per axis	2 axis	2		
Special model				
X Special / customer specified				

Naval Cruise Controller



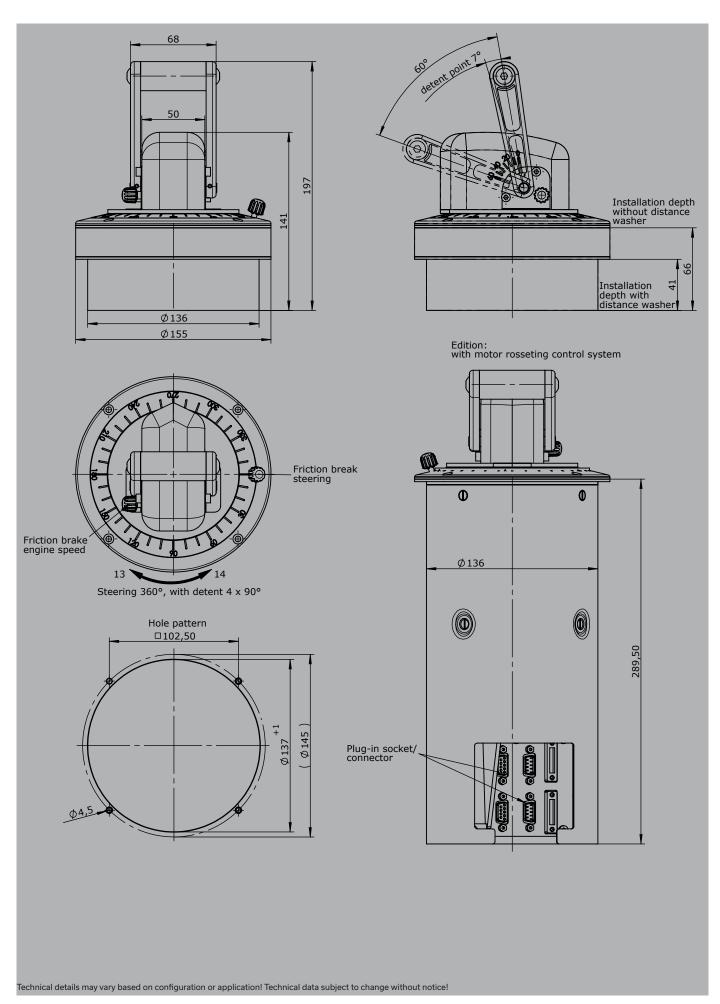



The Double-Handle Controller D3 is a robust switching device for nautical navigation applications. The modular design enables the switching device to be used universally. The Double-Handle Controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.


Technical data

Mechanical life D3 12 million operating cycles


Operation temperature -40°C to +85°C

Degree of protection IP66 front



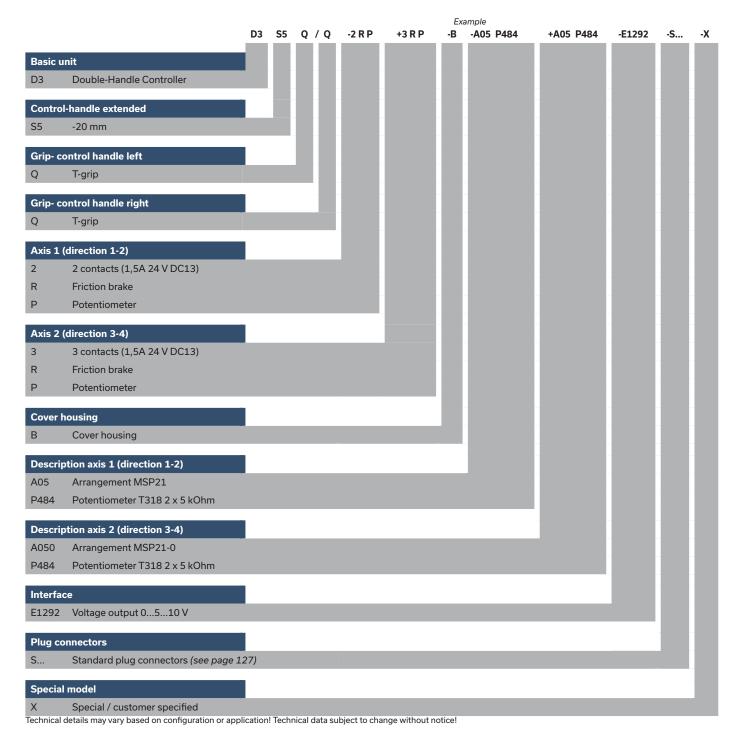



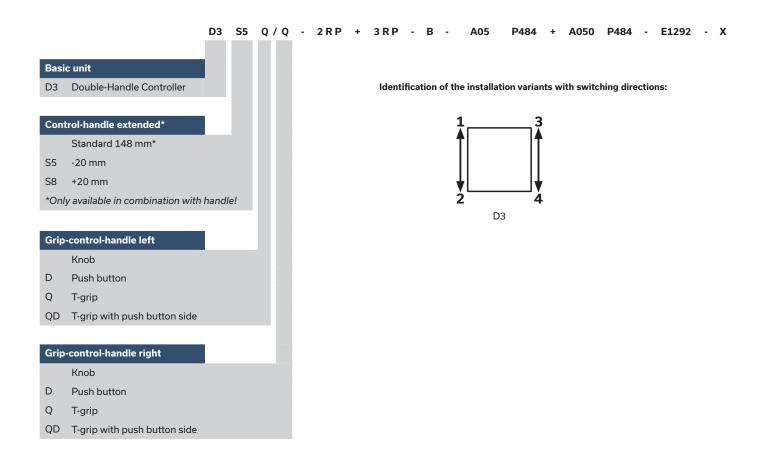

	D3	S5	Q/Q	-	2 R P	+	3 R P	-	В	٠,	A05	F	P484	+	A050	A050 P484	A050 P484 -	A050 P484 - E12	A050 P484 - E1292
Axis	1: direction 1-2 left											d							
1	1 contact	Stand	dard cor	ntact	- arrang	emer	nt see p	age :	129										
2	2 contacts	e.g.																	
3	3 contacts	A98				MS	0												
		A05				MS	21												
		A050)			MS	21-0												
		A99	contact	- arra	angeme	nt acc	cording	cust	ome	r rec	quest								
R	Friction brake																		
(P)	Mounting options for potentiometer	r and (Gessma	ınn-t	ypes)														
Р	Potentiometer		P484		T318 2	2 x 5 k	Ohm		l ma	ax. 1	. mA								
			More p	oten	ntiomete	ers on	reques	st!											
Н	Hall-Potentiometer		E1481:	1			0,52	,54	I,5 V	/ 4,5	52,50	0,5 V							



В A05 P484 D3 S5 Q/Q 2 R P 3 R P A050 P484 - E1292 - X Axis 2: direction 3-4 left 1 Standard contact- arrangement see page 129 1 contact 2 2 contacts e.g. 3 MS0 3 contacts A98 A05 MS21 A050 MS21-0 A99 contact - arrangement according customer request R Friction brake (P) Mounting options for potentiometer (Gessmann-types) Ρ Potentiometer P484 T318 2 x 5 kOhm I max. 1 mA More potentiometers on request! Hall-Potentiometer E14811 0,5...2,5...4,5 V / 4,5...2,5...0,5 V P484 D3 S5 Q/Q 3 R P В A05 A050 P484 - E1292 - X 2RP **Cover housing** В Cover housing **Interface** (description the following pages) Potentiometer output Voltage output E2xx Current output Special model Χ Special / customer specified Voltage outputs 11,5-32 V DC Supply voltage Wiring Cable 300 mm long without plug connector S Optional with plug connector (standard plug connectors see page 127) 0...5...10 V per axis E129 1 1 axis 2 axis 2 10...0...10 V per axis

Current outputs				
Supply voltage	18-36 V DC			
Wiring	Cable 500 mm long without plug connector			
Optional with plug connector (standard plug connectors see page 127)			S	
41220 mA per axis				
		1 axis	E209 1	
		2 axis	2	
20420 mA per axis				
		1 axis	E217 1	
		2 axis	2	

1 axis

2 axis

1 axis

2 axis

E141 1


F1401

2

-10...0...+10 V per axis

Voltage output with other value on request!



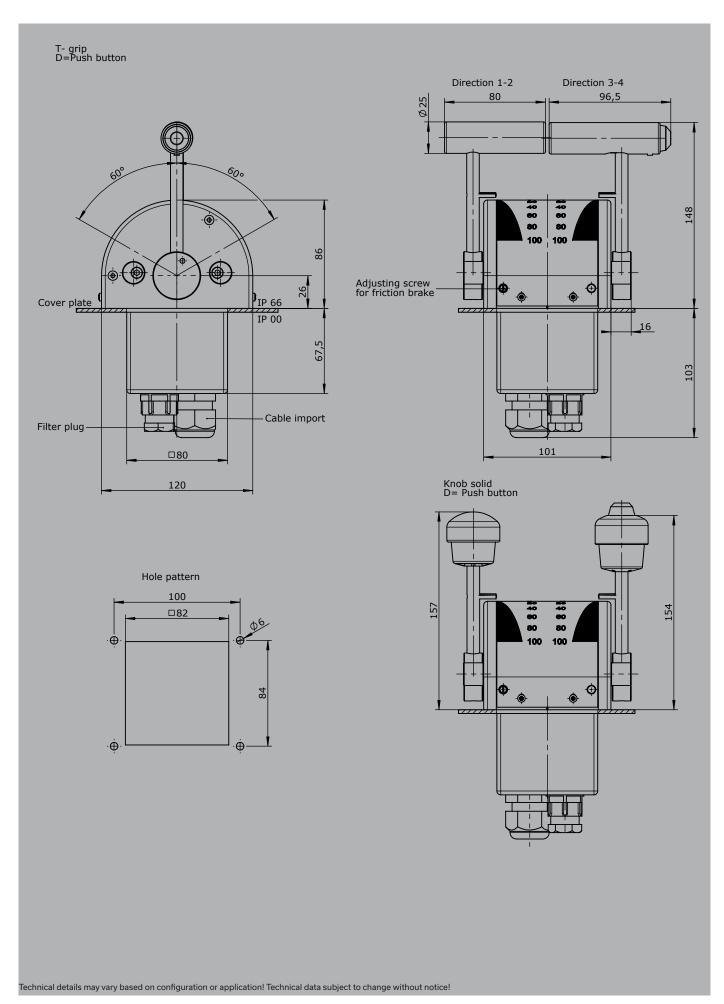





The Single-Axis Controller S3 is a rugged switching device for hoisting applications. The modular design enables the switching device to be used universally. The Single-Axis Controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun


Technical data

Mechanical life S3 12 million operating cycles


Operating temperature -40°C to +85°C

Degree of protection IP66 front



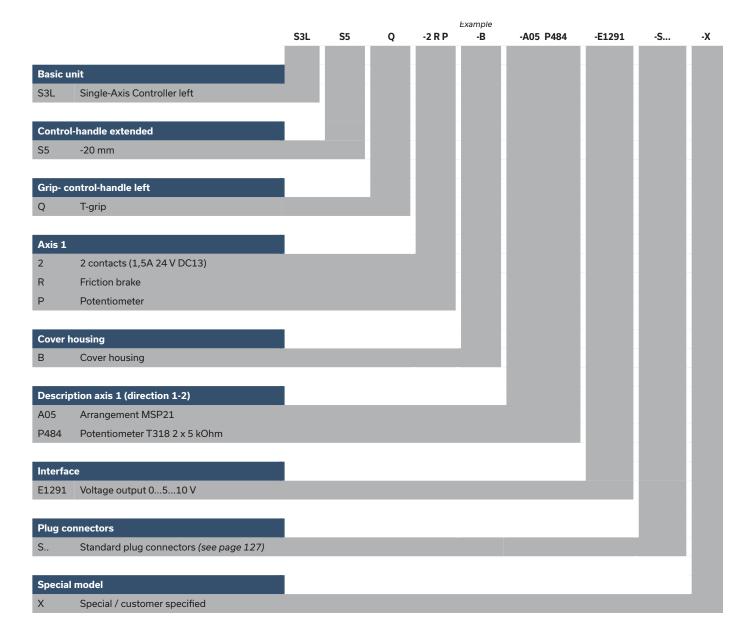



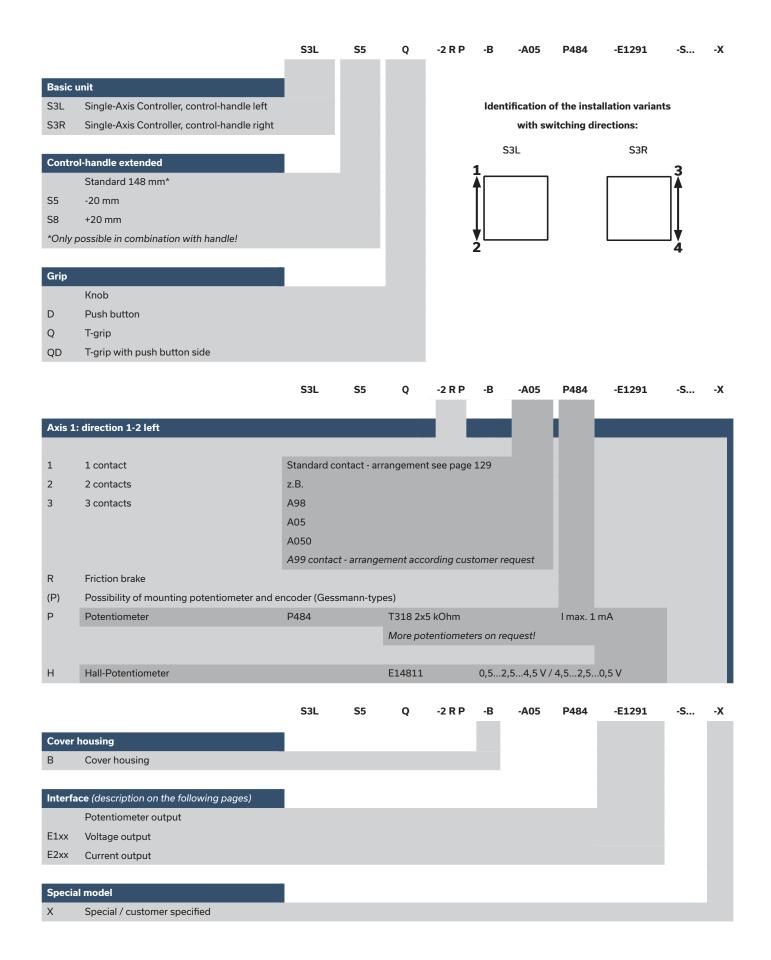




Voltage output				
Supply voltage	11,5-32 V DC			
Wiring	Cable 500 mm long without plug connector			
	Optional with plug connector (standard plug connector	rs see page 127)		S
0510V				
		1 axis	E112 1	
10010V				
		1 axis	E141 1	
-100+10V				
		1 axis	E140 1	
Voltage output with other value	e on request!			

Current output		
Supply voltage	18-36 V DC	
Wiring	Cable 500mm long without plug connector	
	Optional with plug connector (standard plug connectors see page 127)	S
41220 mA		
	1 axis	E209 1
20420 mA		
	1 axis	E217 1



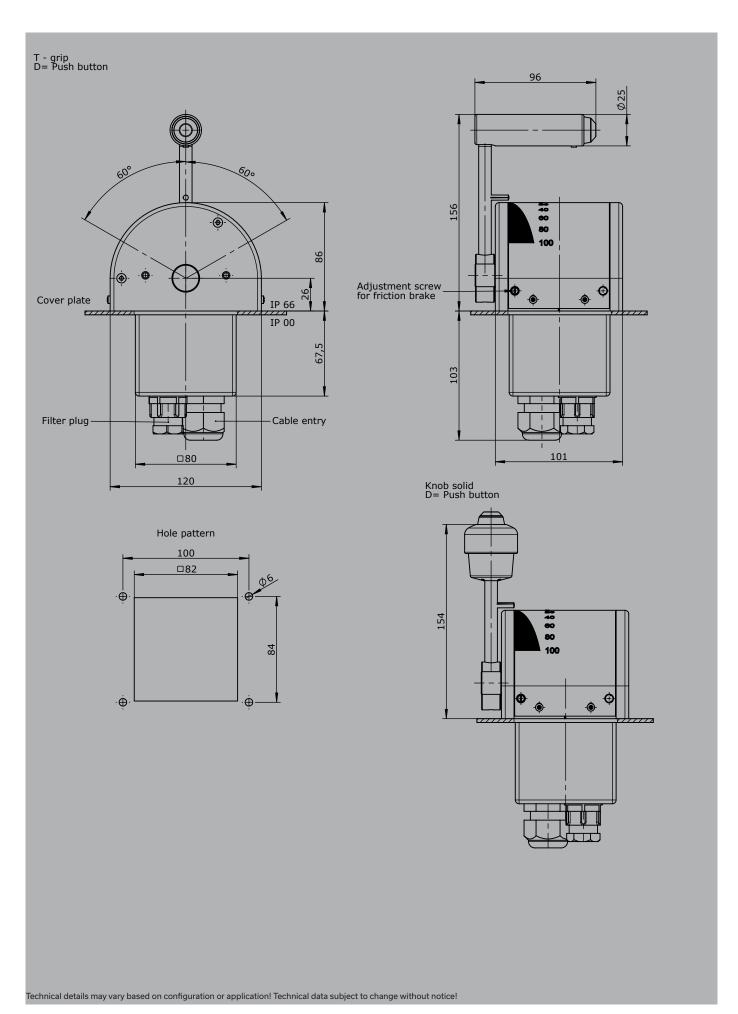





The Single-Axis Controller S23 is a robust switching device for shipbuilding and electro-hydraulic applications. The modular design of the switching device is universally applicable. The Single-Axis Controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.


Technical data


Mechanical life S23 6 million operating cycles

Operating temperature -40°C to +85°C


Degree of protection IP65



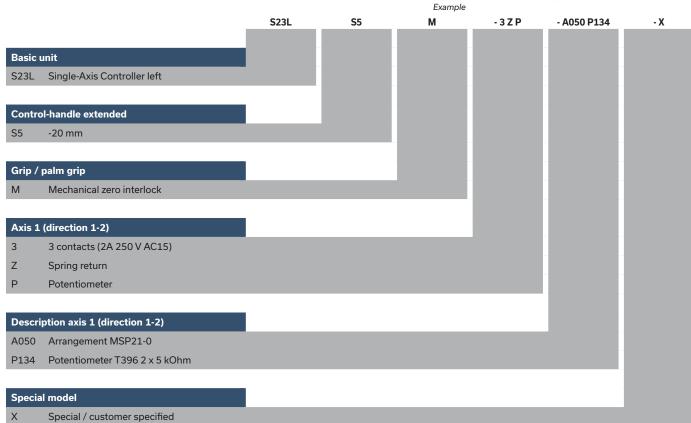


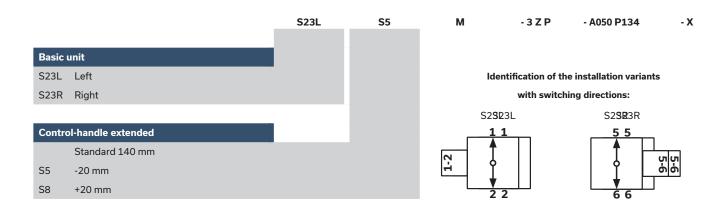



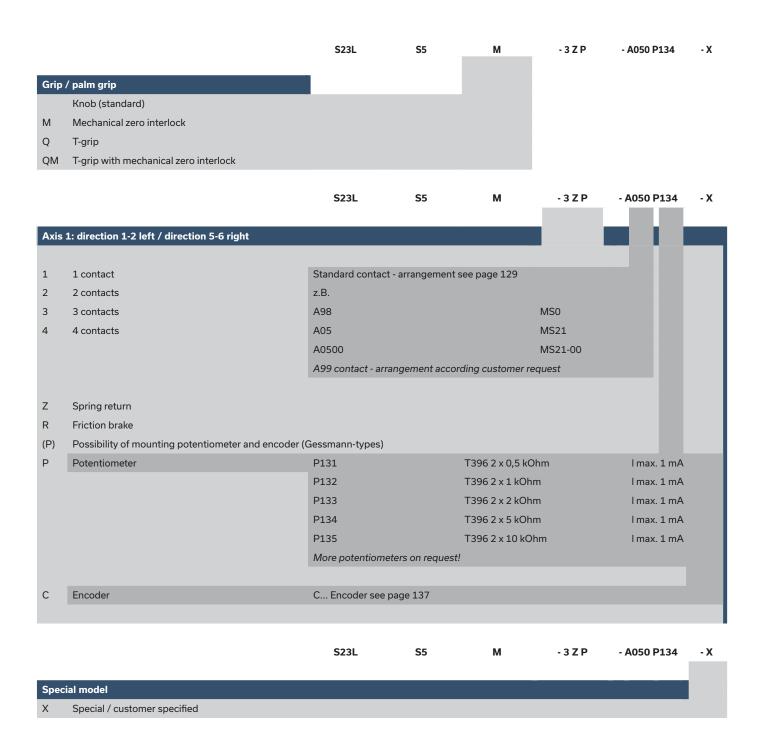



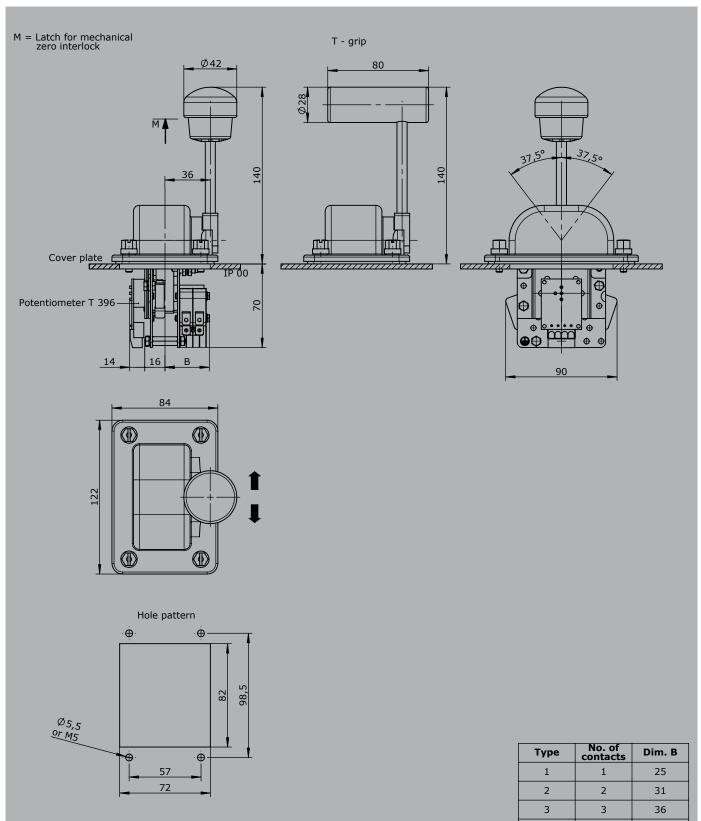

Туре	No. of contacts	Dim. B
1	1	25
2	2	31
3	3	36
4	4	42

Technical details may vary based on configuration or application! Technical data subject to change without notice!



The Single-Axis Controller S27 is a hall sensor switching device designed for electro-hydraulic and remote controlled hydraulic. The modular design of the switching device is universally applicable. The Single-Axis Controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data

Mechanical life S27 6 million operating cycles

Operating temperature -40°C to +85°C

Degree of protection Up to IP65, electronic assembly IP67

PLd compatible (EN ISO 13849, complies SIL2 Functional safety

to DIN EN IEC 61508)



Example S27L - Z М - E... - S... - X Basic unit S27L Single-Axis Controller left S27R Single-Axis Controller right Grip / palm grip Knob (standard) Μ Mechanical zero interlock Q T-grip Ζ Spring return R Friction brake **Interface** (description on the following pages) E0xx Digital output E1xx Voltage output E2xx Current output ЕЗхх **CAN-Interface** E4xx **CAN Safety Interface** Plug connectors Standard plug connectors (see page 127) Special model Special / customer specific

Identification of the installation variants

with switching directions:

S27 left S27 right



Digital Output			
Supply voltage	9-32 V DC		
Current carrying capacity	Direction signal 150 mA		
	Zero position signal 500 mA		
Wiring	Cable 500 mm long without plug conne	ctor	
	Optional with plug connector (standard	plug connectors see page 127)	S
2 direction signals + 1 zero position signal (g	alvanically isolated)		
		1 axis	E0011

Voltage output (not stabilized)				
Supply voltage	4,75-5,25 V DC			
Current carrying capacity	Direction signal 8 mA			
Wiring	Cable 500 mm long without plug	gconnector		
	Optional with plug connector (st	andard plug connectors see page 127)		S
0,52,54,5 V redundant + 2 direction	signals			
		1 axis	E104 1	
		Output options		
		Characteristic:		
		Inverse dual		1
		Dual		2
		Inverse dual with dead zone +/- 3° (standard)		3
		Dual with dead zone +/- 3°		4

Voltage output				
Supply voltage	9-32 V DC (*11,5-32 V)			
Current carrying capacity	Direction signal 150 mA			
	Zero position signal 500 mA			
Wiring	Cable 500 mm long without plug conn	ector		
	Optional with plug connector (standar	d plug connectors see page 127)		S
0,52,54,5 V redundant + 2 direction	n signals + 1 zero position signal (galvanically is	solated)		
		1 axis	E112 1	
0510 V redundant + 2 direction sig	nals + 1 zero position signal (galvanically isolat	ed), supply voltage 11,5 - 32 V DC		
		1 axis	E132 1	
10010 V + 2 direction signals + 1 ze	ero position signal (galvanically isolated), suppl	y voltage 11,5 - 32 V DC, sensor redundant		
witherror monitoring and error signal				
		1 axis	E136 1	
		Output options		
		Characteristic:		
		Inverse dual *1		1
		Dual *1		2
		Inverse dual with dead zone +/- 3° *1 (standar	d)	3
		Dual with dead zone +/- 3° *1		4
		*1 Not combinable with output E136X		
		Single *2		5
		Single with dead zone *2 (standard)		6
		*2 Not combinable with output E112X and E1	32X	
Voltage output with other value on req	uest!			




Current output						
Supply voltage	9-32 V DC					
Current carrying capacity	Direction signal 150 mA					
	Zero position signal 500 mA					
Wiring	Cable 500 mm long without plug connector					
	Optional with plug connector (standard plug connectors see	e page 127)		S		
01020 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring and error signal						
		1 axis	E206 1			
20020 mA + 2 direction sig	nals + 1 zero position signal (galvanically isolated), sensor red	undant with error monitoring a	nd error signal			
		1 axis	E208 1			
41220 mA + 2 direction sig	nals + 1 zero position signal (galvanically isolated), sensor red	undant with error monitoring a	nd error signal			
		1 axis	E214 1			
20420 mA + 2 direction sig	nals + 1 zero position signal (galvanically isolated), sensor red	undant with error monitoring a	nd error signal			
		1 axis	E216 1			
		Output options				
		Single		5		
		Single with dead zone +/-3° (s	standard)	6		
Current output with other value on request!						


CAN							
Supply voltage	9-32 V DC						
Idle current consumption	120 mA (24 V DC)						
Current carrying capacity External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)							
Mounting depth A	Mounting depth A 35 mm						
Protocol	CANopen CiA DS 301 or SAE J1939 (based on)						
Baud rate	20 kBit/s to 1 Mbit/s (standard 250 kBit/s)						
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)						
	CAN (OUT) cable 300 mm with plug connector M12 (female)						
	External in-/outputs cable 300 mm long without plug connector						
	Optional with plug connector (standard plug connectors see page 127)	S					
CAN		E322 1					
- 3 analog joystick axis							
- 8 digital joystick functions (inc	cl. input for capacitive sensor)						
- Output for vibrator control							
With additional outputs	With additional outputs						
- 8 LED-Outputs (dimmable opt	ional)	2					




CAN Safety					
Supply voltage	9-32 V DC				
Idle current consumption	120 mA (24 V DC)				
Current carrying capacity	External digital output for LEDs 5 mA - 30 mA (dependent on the number of LEDs)				
Baud rate	20 kBit/s to 1 MBit/s (standard 250 kBit/s)				
Mounting depth	35 mm				
Protocol	CANopen Safety EN50325-5 or J1939-76				
Wiring	CAN (IN) cable 300 mm with plug connector M12 (male)				
CAN (OUT) cable 300 mm with plug connector M12 (female)					
	External in-/outputs cable 300 mm long without plug connector				
	Optional with plug connector (standard plug connectors see page 127)	S			
CAN Safety		E422 1			
- 3 analog joystick axis					
- 8 digital joystick functions (incl. input for capacitive sensor)					
- Output for vibrator control					
With additional outputs					
- 8 LED-Outputs (dimmable opt	tional)	2			



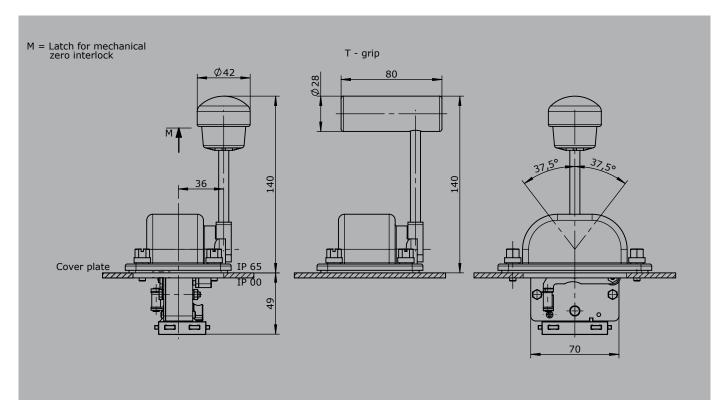





Control Pedestal (U22/32





The Control Pedestal U22/32 accomodate the devices necessary for control and monitoring. Ready wired, it can be quickly and easily installed on the sea deck. The housing (pedestal head) is made of seawater-resistant aluminium.

Surface treatment: Priming and structure-finishing paint Standard colour RAL 7032 pepple-grey

Technical data:

Operation temperature -40°C to +85°C

Degree of protection IP66



Example

			U22/32	/	N61/ N62	/	H / PW / 2D	/	PQ	/	KLV	/	X
												-	
Housing	_				-			-				ŀ	
U22/32		w side-plate with pilla	r-gasket										
FD		arrow gasket						_				-	
HD	Side-plate w (required for	ide gasket command and indica	ting devices)										ı
KD	Hinged side-	-plate with gasket that	can be locked in posit	ion									
IA	72 x 72 mm	devices cover with gas or 4 monitors 72 x 36 evices pos. 28, 29	ket for max. 2 monitors mm and max. 6	S									
RS	Pillar 108 mr	m Ø 670 mm height w	ith flange quadratic or	round									
Masters	switch / Contro	ol-Switch						_					
N61		witch with ball handle	and indicating labels			1		-				-	
N62		Switch with knob and i	_			1		-				-	
Axis 1:	direction 3-4		-HG -01 Z P	-A05	P134 -X			_					
(:	Standard conta	cts gold-plated 2A 25	0 V AC15)			Ι.							
01 2	contacts	Standard contact - a	rrangement see page 1	129									
02 4	l contacts	z.B.											
03 6	contacts	A05	MS21			Ι.						L	
04 8	3 contacts	A0500	MS21-00			Ι.						L	
		A99 contact - arrang	ement according custo	omer request				_	-			-	
Z S	Spring return												
R F	riction brake												
P P	Potentiometer	P131	T396 2 x 0,5 kOhm	I max. 1 mA									
		P132	T396 2 x 1 kOhm	I max. 1 mA		Ι.						L	
		P133	T396 2 x 2 kOhm	l max. 1 mA									
		1 100	1330 2 X 2 KOIIIII	TITIAX. TITIA				-					
		P134	T396 2 x 5 kOhm	I max. 1 mA									
		P134	T396 2 x 5 kOhm T396 2 x 10 kOhm	l max. 1 mA									


Control Pedestal U22/32



		U22/32	/ N61/N62	/	H / PW / 2D	/	PQ	/	KLV	/	X
Com	mand and indicating devices					_					
Н	Heating	20 Watt 220 or 110V 50/60 Hz									
PV	Mushroom head push button latching	22 latching with indicating label	1 NC								
Р	Mushroom head push button	22 with indicating label	1 NO								
D	Push button	22 with indicating label	1 NO								
W	Selector switch 0-1	22 with indicating label	1 NO								
L	Indicator light	22 with indicating label	Diode 24 Volt								
L	Indicator light	22 with indicating label	Diode 230 Volt A	С							
	Contact block additional		1 S or 1 Ö								
L	Indicator light	22 with indicating label	Diode 24 Volt pro	tecti	on IP65						
L	Indicator light	10 with indicating label	Diode 24 Volt pro	tecti	on IP65						
Disp	lay devices										
PQ	Powermeter PQ 72 1 mA DC	E	Engraved your instruct	tions							
PQI	Powermeter PQ 72 1 mA DC illuminated	I 24 Volt	Engraved your instruct	tions							
PQ	Powermeter PQ 72 x 36 1 mA DC	E	Engraved your instruct	tions							
PQI	Powermeter PQ 72 x 36 1 mA DC illumin	nated 24 Volt	Engraved your instruct	tions							
EQ	Amperemeter EQ 72 100/200/1A	E	Engraved your instruct	tions							
EQI	Amperemeter EQ 72 100/200/1A illumin	nated 24 Volt	Engraved your instruct	tions							
EQ	Amperemeter EQ 72 x 36 100/200/1A	E	Engraved your instruct	tions							
EQI	Amperemeter EQ 72 x 36 100/200/1A il	luminated 24 Volt	Engraved your instruct	tions							
Wiri	ng										
KLV o	on terminal block 2,5mm² with wire line 0,7	75 mm ²									
Spec	ial model										
Χ	Special / customer specified										

Control Pedestal U22/32



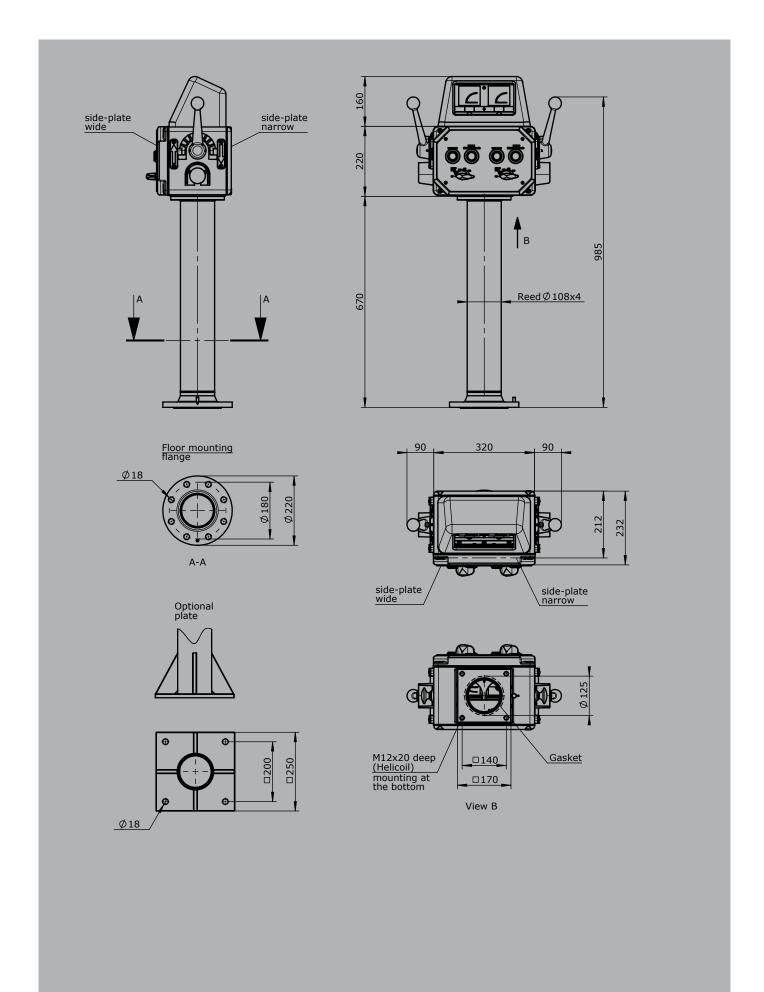

Technical details may vary based on configuration or application! Technical data subject to change without notice!

345

Control Pedestal (U23/23





The Control Pedestal U23/23 accomodate the devices necessary for control and monitoring. Ready wired, it can be quickly and easily installed on the sea deck. The housing (pedestal head) is made of seawater-resistant aluminium.

Surface treatment: Priming and structure-finishing paint Standard colour RAL 7032 pepple-grey

Technical data:

Operation temperature

-40°C to +85°C

Degree of protection

IP66



U23/23 / N61.../N62... / H / PW / 2D / PQ / KLV /)

Ελ

Housing	
U23/23	With 1 narrow cover with pillar-ga
U23/23A	With 1 narrow cover without drilli
IA	Monitoring devices cover with gas 72 x 72 mm or 4 monitors 72 x 36 indicating devices pos. 28, 29
RS	Pillar 108mm Ø 670 mm height w

Masterswitch / Control-Switch

N61 HG Masterswitch with ball handle and indicating labels
 N62 KN Control-Switch with knob and indicating label

			-HG	-01 Z P	-A05	P134	-X
Axis	1: direction 3-4						
	(Standard conta	cts gold-plated 2A 250 V	AC15)				
01	2 contacts	Standard contact - arran	gement s	ee page 129			
02	4 contacts	z.B.					
03	6 contacts	A05		MS21			
04	8 contacts	A0500		MS21-00			
		A99 contact - arrangeme	ent accord	ding customer	request		
Z	Spring return						
R	Friction brake						
Р	Potentiometer	P131	T396 2	x 0,5 kOhm	I max. 1 mA	4	
		P132	T396 2	x 1 kOhm	I max. 1 mA	4	
		P133	T396 2	x 2kOhm	l max. 1 mA	4	
		P134	T396 2	x 5 kOhm	l max. 1 mA	4	
		P135	T396 2	x 10 kOhm	l max. 1 mA	4	
		More potentiometers on	request!				

V2025/2 17.03.2025






Heating 20 Watt 220 or 110V 50/60 Hz Wushroom head push button latching 22 latching with indicating label 1			U23/23	/	N61/N62	/	H/PW/2D	/	PQ	/	KLV	1	X
PV Mushroom head push button latching 22 latching with indicating label 1 \$\frac{1}{2}\$ Mushroom head push button 22 with indicating label 1 \$\frac{1}{2}\$ W Selector switch 0-1 22 with indicating label 1 \$\frac{1}{2}\$ W Selector switch 0-1 22 with indicating label 1 \$\frac{1}{2}\$ Undicator light 22 with indicating label 22 with indicating label 230 Volt AC 1 \$\frac{1}{2}\$ Undicator light 22 with indicating label 24 Volt Protection IP65 1 \$\frac{1}{2}\$ Undicator light 22 with indicating label 24 Volt protection IP65 1 \$\frac{1}{2}\$ Undicator light 22 with indicating label 10 indicator light 10 indicator light 10 with indicating label 10 indicator light 10 indicator light 10 with indicating label 10 indicator light 10 indicator light 10 indicating label 10 indicating label 10 indicator light 10 indicating label 10 in	Comr	nand and indicating devices	1										
P Mushroom head push button 22 with indicating label 1 S D Push button 22 with indicating label 1 S W Selector switch 0-1 22 with indicating label 1 S L Indicator light 22 with indicating label Diode 24 Volt L Indicator light 22 with indicating label Diode 230 Volt AC Contact block additional 1 S or 1 Ô L Indicator light 22 with indicating label Diode 24 Volt protection IP65 L Indicator light 10 with indicating label Diode 24 Volt protection IP65 L Indicator light 10 with indicating label Diode 24 Volt protection IP65 Diode 24 Volt protection IP65 Powermeter PQ 72 1 mA DC Indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 1 mA DC Indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 1 mA DC Indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 1 mA DC Indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 1 mA DC Indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 1 mA DC Indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 1 mA DC Indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 2 x 36 1 mA DC Indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 2 x 36 1 mA DC Indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 x 36 1 mA DC Indicating label Diode 24 Volt Engraved your instructions PQ Amperemeter EQ 72 100/200/1A Indicating label Diode 24 Volt Engraved your instructions PQ Amperemeter EQ 72 x 36 100/200/1A Indicating label Diode 24 Volt Engraved your instructions PQ Amperemeter EQ 72 x 36 100/200/1A Illuminated 24 Volt Engraved your instructions PQ Amperemeter EQ 72 x 36 100/200/1A Illuminated 24 Volt Engraved your instructions PQ Amperemeter EQ 72 x 36 100/200/1A Illuminated 24 Volt Engraved your instructions PQ Amperemeter EQ 72 x 36 100/200/1A Illuminated 24 Volt Engraved your instructions	Н	Heating	20 Watt 220 or 110V 50/6	60 Hz								_	
D Push button 22 with indicating label 1 S W Selector switch 0-1 22 with indicating label 1 S L Indicator light 22 with indicating label Diode 24 Volt L Indicator light 22 with indicating label Diode 230 Volt AC Contact block additional 1 S or 1 Ö L Indicator light 22 with indicating label Diode 24 Volt protection IP65 L Indicator light 10 with indicating label Diode 24 Volt protection IP65 L Indicator light Diode 24 Volt protection IP65 Display devices PQ Powermeter PQ 72 1 mA DC Engraved your instructions PQI Powermeter PQ 72 1 mA DC illuminated 24 Volt Engraved your instructions PQI Powermeter PQ 72 x 36 1 m A DC illuminated 24 Volt Engraved your instructions EQI Amperemeter EQ 72 x 30/200/1A Engraved your instructions EQI Amperemeter EQ 72 1 x 36 1 00/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 1 00/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 1 00/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 1 00/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 1 00/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 1 00/200/1A illuminated 24 Volt Engraved your instructions EQI Amperemeter EQ 72 x 36 1 00/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	PV	Mushroom head push button latching	22 latching with indicating	label	1Ö								
W Selector switch 0-1 22 with indicating label 1 S L Indicator light 22 with indicating label Diode 24 Volt L Indicator light 22 with indicating label Diode 230 Volt AC Contact block additional 1 S or 1 Ö L Indicator light 22 with indicating label Diode 24 Volt protection IP65 L Indicator light 22 with indicating label Diode 24 Volt protection IP65 L Indicator light 10 with indicating label Diode 24 Volt protection IP65 Display devices PQ Powermeter PQ 72 1 mA DC Engraved your instructions PQI Powermeter PQ 72 1 mA DC illuminated 24 Volt Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC Engraved your instructions EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm²	Р	Mushroom head push button	22 with indicating label		1S								
L Indicator light 22 with indicating label Diode 24 Volt L Indicator light 22 with indicating label Diode 230 Volt AC Contact block additional 1 S or 1 Ö L Indicator light 22 with indicating label Diode 24 Volt protection IP65 L Indicator light 10 with indicating label Diode 24 Volt protection IP65 Display devices PQ Powermeter PQ 72 1 mA DC Engraved your instructions PQI Powermeter PQ 72 1 mA DC Engraved your instructions PQ Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQ Powermeter PQ 72 x 36 1 mA DC Engraved your instructions EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 75 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 75 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 75 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 75 x 36 100/200/1A Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	D	Push button	22 with indicating label		1 S								
L Indicator light 22 with indicating label 15 or 1 Ö L Indicator light 22 with indicating label Diode 24 Volt protection IP65 L Indicator light 10 with indicating label Diode 24 Volt protection IP65 L Indicator light 10 with indicating label Diode 24 Volt protection IP65 Dio	W	Selector switch 0-1	22 with indicating label		1S								
Contact block additional L Indicator light 22 with indicating label Diode 24 Volt protection IP65 L Indicator light 10 with indicating label Diode 24 Volt protection IP65 PQ Powermeter PQ 72 1 mA DC Illuminated 24 Volt Engraved your instructions EQ Amperemeter PQ 72 x 36 1 mA DC Illuminated 24 Volt Engraved your instructions Diode 24 Volt protection IP65 Diode 24 Volt protection IP65 Engraved your instructions EQ Amperemeter PQ 72 x 36 1 mA DC Illuminated 24 Volt Engraved your instructions Diode 24 Volt protection IP65 Diode 24 Volt protection IP65 Engraved your instructions Engraved your instructions Engraved your instructions Diode 24 Volt Engraved your instructions Engr	L	Indicator light	22 with indicating label		Diode 24 Volt								
L Indicator light 22 with indicating label Diode 24 Volt protection IP65 L Indicator light 10 with indicating label Diode 24 Volt protection IP65 Protection IP65 Diode 24 Volt protection IP65 Protection IP65 Diode 24 Volt protection IP65 Diode	L	Indicator light	22 with indicating label		Diode 230 Volt A	C							
Display devices PQ Powermeter PQ 72 1 mA DC Engraved your instructions PQI Powermeter PQ 72 1 mA DC Engraved your instructions PQ Powermeter PQ 72 1 mA DC Engraved your instructions PQ Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions		Contact block additional			1 S or 1 Ö								
Display devices PQ Powermeter PQ 72 1 mA DC Engraved your instructions PQI Powermeter PQ 72 1 mA DC illuminated 24 Volt Engraved your instructions PQ Powermeter PQ 72 x 36 1 mA DC PQI Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Viring KLV on terminal block 2,5 mm² with wire line 0,75 mm²	L	Indicator light	22 with indicating label		Diode 24 Volt pro	otect	ion IP65						
PQ Powermeter PQ 72 1 mA DC Engraved your instructions PQI Powermeter PQ 72 1 mA DC illuminated 24 Volt Engraved your instructions PQ Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm²	L	Indicator light	10 with indicating label		Diode 24 Volt pro	otect	ion IP65						
PQ Powermeter PQ 72 1 mA DC Engraved your instructions PQI Powermeter PQ 72 1 mA DC illuminated 24 Volt Engraved your instructions PQ Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 100/200/1A Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm²													
PQI Powermeter PQ 72 1 mA DC illuminated 24 Volt Engraved your instructions PQ Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	Displ	ay devices											
PQ Powermeter PQ 72 x 36 1 mA DC Engraved your instructions PQI Powermeter PQ 72 x 36 1 mA DC illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 100/200/1A illuminated 24 Volt Engraved your instructions EQI Amperemeter EQ 72 100/200/1A illuminated 24 Volt Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	PQ	Powermeter PQ 72 1 mA DC		Engrav	ed your instruction	S							
PQI Powermeter PQ 72 x 36 1 mA DC illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	PQI	Powermeter PQ 72 1 mA DC illuminated	24 Volt	Engrav	ed your instruction	S							
EQ Amperemeter EQ 72 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	PQ	Powermeter PQ 72 x 36 1 mA DC		Engrav	ed your instruction	S							
EQI Amperemeter EQ 72 100/200/1A illuminated 24 Volt Engraved your instructions EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	PQI	Powermeter PQ 72 x 36 1 mA DC illumin	ated 24 Volt	Engrav	ed your instruction	S							
EQ Amperemeter EQ 72 x 36 100/200/1A Engraved your instructions EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	EQ	Amperemeter EQ 72 100/200/1A		Engrav	ed your instruction	S							
EQI Amperemeter EQ 72 x 36 100/200/1A illuminated 24 Volt Engraved your instructions Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	EQI	Amperemeter EQ 72 100/200/1A illumin	nated 24 Volt	Engrav	ed your instruction	S							
Wiring KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	EQ	Amperemeter EQ 72 x 36 100/200/1A		Engrav	ed your instruction	S							
KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model	EQI	Amperemeter EQ 72 x 36 100/200/1A il	luminated 24 Volt	Engrav	ed your instruction	S							
KLV on terminal block 2,5 mm² with wire line 0,75 mm² Special model													
Special model	Wirin	g											
	KLV o	n terminal block 2,5 mm² with wire line 0,7	5 mm ²										
X Special / customer specified	Speci	al model											
	Χ	Special / customer specified											

Control Pedestal U23/23



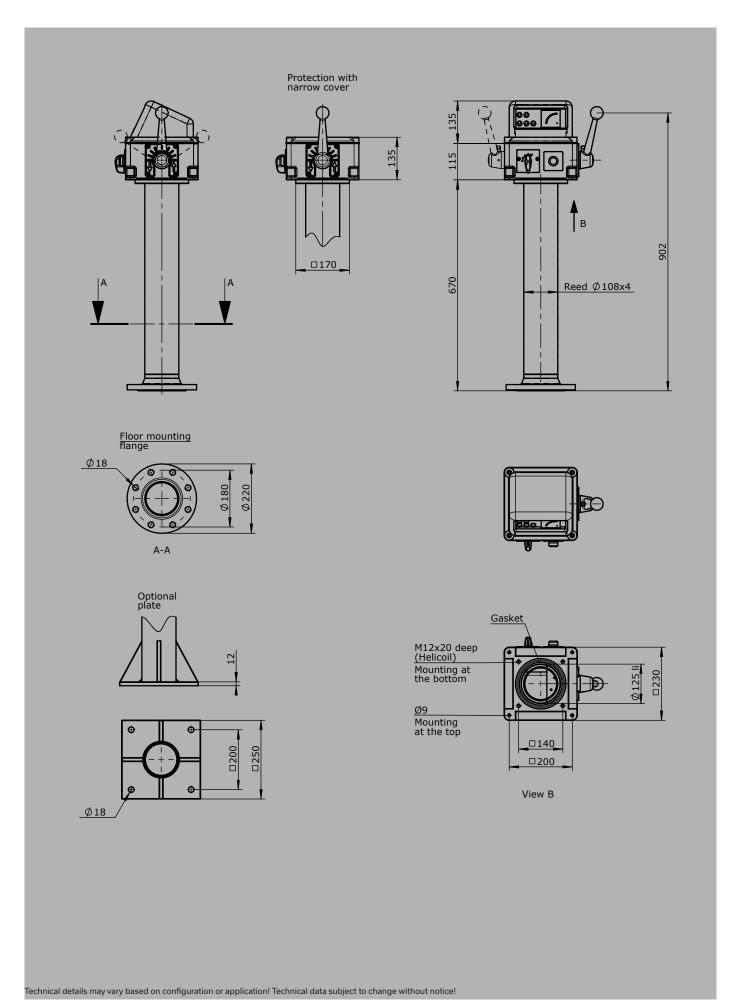

DEALER NETWORK WORLDWIDE

AlgeriaPhoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Australia

Hunter Engineering Sales 29 Torrens Avenue Cardiff NSW 2285 Phone: +61 24 95 28 53 3 info@hesales.com.au www.hesales.com.au

Bahrain

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Belgium

Batenburg Mechatronica B.V. Leuvensesteenweg 613 1930 Zaventem zuid 7 Phone: +32 22 53 31 20 info@batenburgbelgie.be www.batenburg-mechatronica.com

Bosnia-Herzegovina

Elektro UMI d.o.o. Milene Cupic 11 11250 Zeleznik Phone: +38 11 12 57 62 06 office@elektroumi.rs www.elektroumi.rs

Brazil

Rua José Correia Sérgio 146Curitiba/PR CEP 81320-010 Phone: +55 41 39 95 21 54 vendas@sag.ind.br www.sag.ind.br

Canada

Gessmann North America Limited 8620 Escarpment Way, Unit 5-7 Militon ON L9T 0M1 Phone: +19 05 69 36 94 8 Sales.NorthAmerica@gessmann.com www.gessmannnorthamerica.com GE55MANN

Sistemas de Control Ltda La Cordillera 21- Lampa 8320000 Santiago Phone: +56 22 95 27 96 6 alorca@scontrol.cl www.scontrol.cl

Gessmann China Ltd. K2-183, No. 318 Xiupu Road 201315 Pudong, Shanghai Phone: + 86 21 50 11 34 66 sales@gessmann.com.cn www.gessmann.com

Czech Republic RIA control a.s. 739 61 Trinec-Kanada Phone: +42 05 53 03 88 48 info@riacontrol.cz www.riacontrol.cz

Denmark

Baastrup A/S Dronning Olgas Vej 30 2000 Frederiksberg Phone: +45 38 10 21 29 info@baastrup.com www.baastrup.com

Diibouti

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

MAA Intelengineering SIA 78 Gustava Zemgala Gatve 1039 Riga Phone: +371 26 39 03 98 maaie@maaie.net www.myindustrial.eu

Gessmann Office Finland Harri Järvenpää Vuorikatu 30 A 23500 Uusikaupunki Phone: +35 84 08 28 00 10 harri.jarvenpaa@gessmann.com www.gessmann.com

Kentek Oy Postbox 18, 01721 Vantaa Tiilenlyöjänkuja 4, 01720 Vantaa Phone: +35 89 84 94 20 0 kentek@kentek.fi

Gessmann Office France Nicolas PATRICOT Air Parc 91 ZAC des Hauts de Wissous 3, avenue Jeanne Garnerin Bâtiment Le Pélican 91320 Wissous Phone: +33 65 20 74 55 9 nicolas.patricot@gessmann.com www.gessmann.com

Greece

Euroelektrik Stefanidou Kalliopi & Co. Agios Dimitios 50100 Kozani Phone: +30 30 24 61 09 44 45 kastefa@otenet.gr

Gessmann Controllers India Pvt. Ltd. 1st Floor, Plot No. 19/1-A 2nd Main, 2nd Phase Peenya Industrial Area 560058 Bangalore Phone: +91 99 45 91 91 70 gopalshastry@gessmann.com www.gessmann.com
GESSMANN

Indonesia DELLNER BUBENZER Malaysia Sdn Bhd No. 22, Jalan Mega 1/4 Taman Perindustrian Nusa Cemerlang 81550 Gelang Patah, Johor Phone: +60 75 31 97 99 info.my@dellnerbubenzer.com www.dellnerbubenzer.com

Sepahan Pishtaz Electronic SPE Co No.38, Taher Lane-58 St. Baghdaryache St. 81767-75861 Isfahan Phone: +98 31 37 76 00 42 info@spe.ir www.spe.ir

Ireland

Gessmann UK Limited Unit 29, King Street Industrial Estate Langtoft Lincolnshire Peterborough, PE6 9NF Phone: +44 (0) 1778 775 065 salesuk@gessmann.com www.gessmann.com

Gessmann Office Italy Via Generale Carlo Alberto Dalla Chiesa n.45 20816 Ceriano Laghetto (MB) gabriele.fiore@gessmann.com www.gessmann.com

JapanJEPICO Corporation Shinjuku Front Tower 211 Kita Shinjuku 2-Chome Shinjuku-ku, Tokyo 169-0074 Phone: +81 36 36 20 31 6 r_sato@jepico.co.jp www.jepico.co.jp

Jordan

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Elektro UMI d.o.o. Milene Cupic 11 11250 Zeleznik Phone: +38 11 12 57 62 06 office@elektroumi.rs www.elektroumi.rs

Roritec Co. Ltd. 460-1 Hyomun-Dong Buk-Ku 683-360 Ulsan Phone: +82 52 28 87 11 4 keonju@roritec.co.kr www.roritec.co.kr

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

LatviaMAA Intelengineering SIA 78 Gustava Zemgala Gatve 1039 Riga Phone: +371 26 39 03 98 maaie@maaie.net www.myindustrial.eu

Lebanon

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Lithuania

MAA Intelengineering SIA 78 Gustava Zemgala Gatve 1039 Riga Phone: +371 26 39 03 98 maaie@maaie.net www.myindustrial.eu

Malaysia

DELLNER BUBENZER Malaysia Sdn Bhd No. 22, Jalan Mega 1/4 Taman Perindustrian Nusa Cemerlang 81550 Gelang Patah, Johor Phone: +60 75 31 97 99 info.my@dellnerbubenzer.com www.dellnerbubenzer.com

Morocco

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Macedonia

Elektro UMI d.o.o. Milene Cupic 11 11250 Zeleznik Phone: +38 11 12 57 62 06 office@elektroumi.rs www.elektroumi.rs

Alimentaciones Electricas, S.A. de C.V. Parque Industrial Empresarial Cuautlancingo R.F.C. AEL 740715 1YA Rio Suchiate No. 24 Phone: +52 22 22 10 50 93 almesa@mexis.com.mx www.almesa.com.mx

Montenegro Elektro UMI d.o.o.

Milene Cupic 11 11250 Zeleznik Phone: +38 11 12 57 62 06 office@elektroumi.rs www.elektroumi.rs

New Zealand

Hunter Engineering Sales 29 Torrens Avenue Cardiff NSW 2285 Phone: +61 24 95 28 53 3 info@hesales.com.au www.hesales.com.au

Netherlands

Batenburg Mechatronica B.V. P.O. Box 9393, 3007AJ Rotterdam Stolwijkstraat 33, 3079 DN Rotterdam Phone: +31 10 29 28 78 7 info.mechatronica@batenburg.nl www.batenburg-mechatronica.com

GESSMANN

Norway

Gessmann Office Norway Harald Skjønsberg Nedre ekeberglia 6 3420 Lierskogen Phone: +47 47 30 26 86 Harald.skjonsberg@gessmann.com www.gessmann.com

GESSMANN

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Sistemas de Control Ltda. La Cordillera 21- Lampa 8320000 Santiago Phone: +56 22 95 27 96 6 alorca@scontrol.cl www.scontrol.cl

Philippines

MTI Engineering CO., LTD 94/20, moo 3, Soi-Janthongaium Bangrakpattana, Bangbaothong Nonthaburi 11110 Phone: +66 20 21 90 20 50 53 info@mti-eng.com www.mti-eng.com

Gessmann Polska sp. z o.o. Arkadiusz Jaszkul ul. Dojazdowa 23, III pietro 43-100 Tychy Phone: +48 50 71 34 90 1 salespoland@gessmann.com www.gessmann.com

ELEKTRO-TRADING ul.P.Gojawiczynskiej 13 44-109 Gliwice, Poland Phone: +48 32 33 04 57 0 et@elektro-trading.com.pl www.elektro-trading.com.pl

Portugal

Kimatic S.L Calle Sasikoa, 30 48200 Durango (Vizcaya), Spain Phone: +34 94 62 01 03 6 info@kimatic.es www.kimatic.es

Quatar

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Romania

ELECTRO-DISTRIBUTION S.R.L. Str. mecet nr. 42-44, sector 2 Bucuresti Phone: +40 21 25 32 95 5 office@electrodistribution.ro www.electrodistribution.ro

Saudi Arabia

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Sweden

Gessmann Office Norway Harald Skjønsberg Nedre ekeberglia 6 3420 Lierskogen Phone: +47 47 30 26 86 Harald.skjonsberg@gessmann.com www.gessmann.com
GESSMANN

Serbia

Elektro UMI d.o.o. Milene Cupic 11 . 11250 Zeleznik Phone: +38 11 12 57 62 06 office@elektroumi.rs www.elektroumi.rs

Singapore DELLNER BUBENZER Singapore Pte Ltd 110 Lorong 23 Geylang #06-04 Victory Centre Singapore 388410 Phone: +65 67 47 02 40 info.sg@dellnerbubenzer.com www.dellnerbubenzer.com

Slovakia

VENIO, s.r.o Karmínová 1092/3 01030 Zilina Phone: +42 19 49 13 02 70 venio@venio.sk www.venio.sk

Somalia

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Spain

Kimatic S.L Calle Sasikoa, 30 48200 Durango (Vizcaya) Phone: +34 94 62 01 03 6 info@kimatic.es www.kimatic.es

South Africa

A division of Hudaco Trading (PTY)Ltd. 92, Main Reef Road 1724 Roodepoort Phone: +27 11 27 10 00 0 info@powermite.co.za www.powermite.co.za

MTI Engineering CO., LTD 94/20, moo 3, Soi-Janthongaium Bangrakpattana, Bangbaothong Nonthaburi 11110 Phone: +66 20 21 90 20 50 53 info@mti-eng.com www.mti-eng.com

Türkiye

ARDA Makina Elektrik Ticaret ve Sanavi Ltd. Sti. 100. Yıl Bulvarı 1230. Street No. 1 06374 Ostim-Ankara Phone: +90 31 23 85 80 37 arda@ardaelektrik.com www.ardaelektrik.com

Ukraine

UA-Systems LLC. Moskalivska 93 61004 Charkov Phone: +38 05 77 59 00 96 gessmann@systemsua.com.ua www.geonorma.com.ua

United Arab Emirate

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

United Kingdom

Gessmann UK Limited Unit 29, King Street Industrial Estate Langtoft Lincolnshire Peterborough, PE6 9NF Phone: +44 (0) 1778 775 065 salesuk@gessmann.com www.gessmann.com
GESSMANN

Gessmann USA Inc. Phillips Lytle LLP One Canalside 125 Main Street Buffalo, NY 14203 Phone: +19 05 69 36 94 8 Sales.NorthAmerica@gessmann.com www.gessmannnorthamerica.com

OEM Controls inc. 10 Controls Drive Shelton, Conn. 06484 Phone: +12 03 92 98 43 1 contactUs@oemcontrol.com www.oemcontrols.com

Vietnam

MTI Engineering CO., LTD 94/20, moo 3, Soi-Janthongaium Bangrakpattana, Bangbaothong Nonthaburi 11110 Phone: +66 20 21 90 20 50 53 info@mti-eng.com

Yemen

Phoenix Engineering Solutions FZ LLE Al Saaha Offices B 404 Dubai Phone: +97 15 01 71 38 32 john.rostagno@phoenix-es.com www.phoenix-es.com

Representation in Germany

Dr.-Ing. Klaus Zimmermann Ingenieurbüro Hauptstraße 158 06493 Harzgerode OT Neudorf Phone: +49 39 48 46 36 4 ib-zimmermann@gmx.de www.gessmann.com

Systemautomation Zimmermann Dipl.-Ing. Jan Zimmermann Hauptstraße 158 O6493 Harzgerode OT Neudorf Phone: +49 39 48 47 42 48 4 saz-zimmermann@gmx.de www.gessmann.com





SETTING BIG THINGS INTO MOTION

HEADQUARTERS AND LOCATIONS OF GESSMANN GROUP

Headquarters Germany Gessmann Group
W. Gessmann GmbH

Engineering, Production and Sales Eppinger Straße 221 74211 Leingarten Germany

Siemensstraße 17 74193 Schwaigern Germany Phone +49 7131 40 67-722 sales@gessmann.com www.gessmann.com

GESSMANN GROUP

Sales office France Gessmann Office France Nicolas Patricot Air Parc 91

ZAC des Hauts de Wissous 3, avenue Jeanne Garnerin Bâtiment Le Pélican 91320 Wissous

Phone +33 652 074 559

nicolas.patricot@gessmann.com

Sales office Italy Gessmann Office Italy Via Generale Carlo Alberto Dalla Chiesa n.45

20816 Ceriano Laghetto (MB) Phone +39 338 664 989 3 gabriele.fiore@gessmann.com Sales office Norway

Sales office

Finland

Gessmann Office Norway Harald Skjønsberg Nedre ekeberglia 6 3420 Lierskogen Phone +47 473 026 86

Harald.skjonsberg@gessmann.com

Gessmann Office Finland Harri Järvenpää Vuorikatu 30 A 23500 Uusikaupunki Phone + 358 408 280 010 harri.jarvenpaa@gessmann.com

GESSMANN NIEDERLASSUNGEN

Subsidary

North America, Mexico, Chile, Canada

Production and

Sales location

Subsidary USA

Sales location

Subsidary Asia Production

Sales location

and

Gessmann North America Limited 8620 Escarpment Way, Unit 5-7 Milton ON L9T OM1

CANADA

Phone +1 905 693 6948

Sales.NorthAmerica@gessmann.com www.gessmannnorthamerica.com

Gessmann USA Inc.
Phillips Lytle LLP,
One Canalside
125 Main Street
Buffalo, NY 14203
Phone +1 905 693 6948
Sales.NorthAmerica@gessmann.com

www.gessmannorthamerica.com

Gessmann China Ltd.
K2-183, No. 3188 Xiupu Road
201315 Pudong, Shanghai
Phone +86 21 5011 3466
sales@gessmann.com.cn
www.gessmann.com

Subsidary India

Production and Sales location

Subsidary Poland Production

and Sales location

Subsidary United Kingdom Sales location Gessmann Controllers India Pvt. Ltd.

1st Floor, Plot No. 19/1-A 2nd Main, 2nd Phase, Peenye Industrial Area 560058 Bangalore Phone +91 99 4591 9170 gopalshastry@gessmann.com www.gessmann.com

Gessmann Polska sp. z o.o. ul. Dojazdowa 23, III pietro

43-100 Tychy

arkadiusz.jaszkul@gessmann.com

www.gessmann.com

Gessmann UK Limited

Unit 29, King Street Industrial Estate

Langtoft Lincolnshire
Peterborough, PE6 9NF
Phone +44 (0) 1778 775 065
salesuk@gessmann.com
www.gessmann.com

GESSMANN°

W. Gessmann GmbH

Eppinger Straße 221 74211 Leingarten GERMANY

Siemensstraße 17 74193 Schwaigern GERMANY Phone +49 (0) 7131 40 67-722 sales@gessmann.com www.gessmann.com





